MarkLogic Server

MarkLogic Connector for Hadoop
Developer's Guide

MarkLogic 7
November, 2013

Last Revised: 7.0-1, November, 2013

Copyright © 2013 MarkLogic Corporation. All rights reserved.

Table of Contents

MarkLogic Connector for Hadoop Developer's Guide

1.0 Introduction to MarkLogic Connector for Hadoop 6
- 1.1 Terms and Definitions 6
- 1.2 Overview 8
  - 1.2.1 Job Building Tools Provided by the Connector 9
  - 1.2.2 Input and Output Selection Features 9
  - 1.2.3 MarkLogic Server Access via XDBC App Server 10
- 1.3 MarkLogic-Specific Key and Value Types 10
- 1.4 Deploying the Connector with a MarkLogic Server Cluster 11
  - 1.4.1 Relationship of MarkLogic Server to a Hadoop Cluster 11
  - 1.4.2 Jobs Use In-Forest Evaluation 12
  - 1.4.3 Cluster-wide XDBC Configuration Requirements 12
- 1.5 Making a Secure Connection to MarkLogic Server with SSL 13

2.0 Getting Started with the MarkLogic Connector for Hadoop 15
- 2.1 Requirements 15
  - 2.1.1 Required Software 15
  - 2.1.2 Security Requirements for MapReduce Jobs 16
- 2.2 Installing the MarkLogic Connector for Hadoop 16
- 2.3 Configuring Your Environment to Use the Connector 17
- 2.4 Running the HelloWorld Sample Application 18
  - 2.4.1 Creating the App Server and Database 19
  - 2.4.2 Loading the Sample Data 19
  - 2.4.3 Loading Sample Data with mlcp 20
  - 2.4.4 Loading Sample Data Manually 21
  - 2.4.5 Configuring the Job 21
  - 2.4.6 Running the Job 22
- 2.5 Making the Connector Available Across a Hadoop Cluster 23
- 2.6 Organization of the Connector Distribution 24

3.0 Apache Hadoop MapReduce Concepts 25
- 3.1 MapReduce Overview 25
- 3.2 Example: Calculating Word Occurrences 27
- 3.3 Understanding the MapReduce Job Life Cycle 28
  - 3.3.1 Job Client 28
  - 3.3.2 Job Tracker 29
  - 3.3.3 Task Tracker 29
  - 3.3.4 Map Task 30
  - 3.3.5 Reduce Task 30

3.4 How Hadoop Partitions Map Input Data 31
3.5 Configuring a MapReduce Job 32
3.5.1 Configuration Basics 32
3.5.2 Setting Properties in a Configuration File 33
3.5.3 Setting Properties Using the Hadoop API 33
3.5.4 Setting Properties on the Command Line 34
3.5.5 Configuring a Map-Only Job 34
3.6 Running a MapReduce Job 34
3.7 Viewing Job Status and Logs 34

4.0 Using MarkLogic Server for Input 36
4.1 Basic Steps 36
4.1.1 Identifying the Input MarkLogic Server Instance 36
4.1.2 Specifying the Input Mode 37
4.1.3 Specifying the Input Key and Value Types 38
4.1.4 Defining the Map Function 39
4.2 Basic Input Mode 40
4.2.1 Creating Input Splits 40
4.2.2 Using a Lexicon to Generate Key-Value Pairs 41
4.2.2.1 Implement a Lexicon Function Wrapper Subclass 42
4.2.2.2 Override Lexicon Function Parameter Wrapper Methods 42
4.2.2.3 Choose an InputFormat 44
4.2.2.4 Configure the Job 45
4.2.2.5 De-duplication of Results Might Be Required 46
4.2.3 Using XPath to Generate Key-Value Pairs 46
4.2.4 Example: Counting Href Links 48
4.3 Advanced Input Mode 50
4.3.1 Creating Input Splits 50
4.3.1.1 Overview 50
4.3.1.2 Creating a Split Query with hadoop:get-splits 51
4.3.2 Creating Input Key-Value Pairs 52
4.3.3 Optimizing Your Input Query 53
4.3.4 Example: Counting Hrefs Using Advanced Mode 54
4.4 Using KeyValueInputFormat and ValueInputFormat 56
4.4.1 Overview 57
4.4.2 Job Configuration 57
4.4.3 Supported Type Transformations 58
4.4.4 Example: Using KeyValueInputFormat 58
4.5 Configuring a Map-Only Job 60
4.6 Direct Access Using ForestInputFormat 60
4.6.1 When to Consider ForestInputFormat 61
4.6.2 Limitations of Direct Access 61
4.6.3 Controlling Input Document Selection 62
4.6.4 Specifying the Input Forest Directories 63
4.6.5 Determining Input Document Type in Your Code 64
4.6.6 Where to Find More Information 65

4.7 Input Configuration Properties 66
4.8 InputFormat Subclasses 68
4.9 Lexicon Function Subclasses 70

5.0 Using MarkLogic Server for Output 72
5.1 Basic Steps 72
5.1.1 Identifying the Output MarkLogic Server Instance 72
5.1.2 Configuring the Output Key and Value Types 73
5.1.3 Defining the Reduce Function 74
5.1.4 Disabling Speculative Execution 75
5.1.5 Example: Storing MapReduce Results as Nodes 76
5.2 Creating a Custom Output Query with KeyValueOutputFormat 78
5.2.1 Output Query Requirements 79
5.2.2 Job Configuration 79
5.2.3 Supported Type Transformations 81
5.3 Controlling Transaction Boundaries 83
5.4 Streaming Content Into the Database 83
5.5 Performance Considerations for ContentOutputFormat 84
5.5.1 Time vs. Space: Configuring Batch and Transaction Size 84
5.5.2 Time vs. Correctness: Using Direct Forest Updates 85
5.5.3 Reducing Memory Consumption With Streaming 86
5.6 Output Configuration Properties 86
5.7 OutputFormat Subclasses 91

6.0 Troubleshooting and Debugging 94
6.1 Enabling Debug Level Logging 94
6.2 Solutions to Common Problems 94
6.2.1 Configuration File Not Found 95
6.2.2 XDBC App Server Not Reachable 95
6.2.3 Authorization Failure 95

7.0 Using the Sample Applications 96
7.1 Set Up for All Samples 96
7.1.1 Install Required Software 96
7.1.1.1 Multi-host Configuration Considerations 96
7.1.2 Install the Sample Configuration Files 97
7.1.3 Modify the Sample Configuration Files 97
7.2 Additional Sample Data Setup 99
7.2.1 Creating the Database 99
7.2.2 Creating the XDBC App Server 100
7.2.3 Loading the Data 100
7.3 Interacting with HDFS 101
7.3.1 Initializing HDFS 102
7.3.2 Accessing Results Saved to HDFS 103
7.3.3 Placing Content in HDFS to Use as Input 103

7.4 Sample Applications 104
7.4.1 HelloWorld 106
7.4.2 LinkCountInDoc 107
7.4.3 LinkCountInProperty 107
7.4.4 LinkCountValue 108
7.4.5 LinkCount 109
7.4.6 LinkCountCooccurrences 110
7.4.7 RevisionGrouper 110
7.4.8 BinaryReader 111
7.4.9 ContentReader 112
7.4.10 ContentLoader 113
7.4.11 ZipContentLoader 114

8.0 Technical Support 116

Combined Product Notices 117
COPYRIGHT 117
TRADEMARK NOTICE 194

1.0 Introduction to MarkLogic Connector for Hadoop

The MarkLogic Server Hadoop MapReduce Connector provides an interface for using a MarkLogic Server instance as a MapReduce input source and/or a MapReduce output destination.

This chapter is an overview of the MarkLogic Connector for Hadoop, covering:

- Terms and Definitions
- Overview
- MarkLogic-Specific Key and Value Types
- Deploying the Connector with a MarkLogic Server Cluster
- Making a Secure Connection to MarkLogic Server with SSL

If you are not already familiar with Hadoop MapReduce, see “Apache Hadoop MapReduce Concepts” on page 25.

For installation instructions and an example of configuring and running a job, see “Getting Started with the MarkLogic Connector for Hadoop” on page 15.

1.1 Terms and Definitions

You should be familiar with the following terms and definitions before using the Hadoop MapReduce Connector.

Term	Definition
Hadoop MapReduce	An Apache Software Foundation software framework for reliable, scalable, distributed parallel processing of large data sets across multiple hosts. The Hadoop core framework includes a shared file system (HDFS), a set of common utilities to support distributed processing, and an implementation of the MapReduce programming model. See “Apache Hadoop MapReduce Concepts” on page 25.
job	The top level unit of work for a MapReduce system. A job consists of an input data set, a MapReduce program, and configuration properties. Hadoop splits a job into map and reduce tasks which run across a Hadoop cluster. A Job Tracker node in the Hadoop cluster manages MapReduce job requests.
task	An independent subcomponent of a job, performing either map or reduce processing. A task processes a subset of data on a single node of a Hadoop cluster.

Term	Definition
map task	A task which contributes to the map step of a job. A map task transforms the data in an *input split* into a set of output key-value pairs which can be further processed by a reduce task. A map task has no dependence on or awareness of other map tasks in the same job, so all the map tasks can run in parallel.
reduce task	A task which contributes to the reduce step of a job. A reduce task takes the results of the map tasks as input, produces a set of final result key-value pairs, and stores these results in a database or file system. A reduce task has no dependence on or awareness of other reduce tasks in the same job, so all the reduce tasks can run in parallel.
mapper	Programatically, a subclass of `org.apache.hadoop.mapreduce.Mapper`. The mapper transforms map input key-value pairs into map output key-value pairs which can be consumed by reduce tasks. An input pair can map to zero, one, or many output pairs.
reducer	Programmatically, a subclass of `org.apache.hadoop.mapreduce.Reducer`. The reducer aggregates map output into final results during the reduce step of a job. The value portion of an input key-value pair for reduce is a list of all values sharing the same key. One input key-value pair can generate zero, one, or many output pairs.
input source	A database, file system, or other system that provides input to a job. For example, a MarkLogic Server instance or HDFS can be used as an input source.
input split	The subset of the input data set assigned to a map task for processing. Split generation is controlled by the `InputFormat` subclass and configuration properties of a job. See "How Hadoop Partitions Map Input Data" on page 31.
input split query	When using MarkLogic Server as an input source, the query that determines which content to include in each split. By default, the split query is built in. In advanced input mode, the split query is part of the job configuration.
input query	When using MarkLogic Server as an input source, the query that generates input key-value pairs from the fragments/records in the input split.

Term	Definition
`InputFormat`	The abstract superclass, `org.apache.hadoop.mapreduce.InputFormat`, of classes through which input splits and input key-value pairs are created for map tasks. The Apache Hadoop MapReduce API includes `InputFormat` subclasses for using HDFS as an input source. The MarkLogic Connector for Hadoop API provides `InputFormat` subclasses for using MarkLogic Server as an input source; see "InputFormat Subclasses" on page 68.
`OutputFormat`	The abstract superclass, `org.apache.hadoop.mapreduce.OutputFormat`, of classes that store output key-value pairs during the reduce phase. The Apache Hadoop MapReduce API includes `OutputFormat` subclasses for using HDFS for output.The MarkLogic Connector for Hadoop API provides `OutputFormat` subclasses for using a MarkLogic Server database as an output destination; see "OutputFormat Subclasses" on page 91.
HDFS	The Hadoop Distributed File System, which can be used as an input source or an output destination in jobs. HDFS is the default source and destination for Hadoop MapReduce jobs.
shuffle	The process of sorting all map output values with the same key into a single `(key, value-list)` reduce input key-value pair. The shuffle happens between map and reduce. Portions of the shuffle can be performed by map tasks and portions by reduce tasks.
CDH	Cloudera's Distribution Including Apache Hadoop, an open source data management platform based on Apache Hadoop. One of the Hadoop distributions supported by the MarkLogic Connector for Hadoop.

1.2 Overview

This section provides a high level overview of the features of the MarkLogic Connector for Hadoop. If you are not already familiar with Hadoop MapReduce, you should first read "Apache Hadoop MapReduce Concepts" on page 25.

Topics covered in this section:

- Job Building Tools Provided by the Connector
- Input and Output Selection Features
- MarkLogic Server Access via XDBC App Server

1.2.1 Job Building Tools Provided by the Connector

The MarkLogic Connector for Hadoop manages sessions with MarkLogic Server and builds and executes queries for fetching data from and storing data in MarkLogic Server. You only need to configure the job and provide map and reduce functions to perform the desired analysis.

The MarkLogic Connector for Hadoop API provides tools for building MapReduce jobs that use MarkLogic Server, such as the following:

- `InputFormat` subclasses for retrieving data from MarkLogic Server and supplying it to the map function as documents, nodes, and user-defined types. See "InputFormat Subclasses" on page 68.
- `OutputFormat` subclasses for saving data to MarkLogic Server as documents, nodes and properties. See "OutputFormat Subclasses" on page 91.
- Classes supporting key and value types specific to MarkLogic Server content, such as nodes and documents. See "MarkLogic-Specific Key and Value Types" on page 10.
- Job configuration properties specific to MarkLogic Server, including properties for selecting input content, controlling input splits, and specifying output destination and document quality. See "Input Configuration Properties" on page 66 and "Output Configuration Properties" on page 86.

1.2.2 Input and Output Selection Features

Using MarkLogic Server for input is independent of using it for output. For example, you can use a MarkLogic Server database for input and save your results to HDFS, or you can use HDFS for input and save your results in a MarkLogic Server database. You can also use MarkLogic Server for both input and output.

The MarkLogic Connector for Hadoop supports two input modes, basic and advanced, through the `mapreduce.marklogic.input.mode` configuration property. The default mode is basic. In basic input mode, the connector handles all aspects of split creation, and your job configuration specifies which content in a split is transformed into input key-value pairs.

In advanced input mode, you control both the split creation and the content selection by writing an input split query and an input query. For details, see "Using MarkLogic Server for Input" on page 36. Basic mode provides the best performance.

When using MarkLogic Server for input, input data can come from either database content (documents) or from a lexicon.

MapReduce results can be stored in MarkLogic Server as documents, nodes, and properties. See "Using MarkLogic Server for Output" on page 72.

1.2.3 MarkLogic Server Access via XDBC App Server

The MarkLogic Connector for Hadoop interacts with MarkLogic Server through an XDBC App Server. When using MarkLogic Server for both input and output, the input server instance and output server instance can be different. The connector API includes configuration properties for identifying the server instances.

The configured MarkLogic Server instance acts as an initial point of contact for the job, but the MarkLogic Connector for Hadoop spreads the query load across all nodes in the MarkLogic Server cluster that host a forest of the target database. The job communicates directly with each node, rather than bottlenecking on the single MarkLogic Server instance configured into the job. For details, see “Deploying the Connector with a MarkLogic Server Cluster” on page 11.

The MarkLogic Connector for Hadoop creates and manages the XDBC sessions for your application using XCC. Your application code need not manage App Server sessions.

1.3 MarkLogic-Specific Key and Value Types

A MapReduce job configuration specifies the input and output key and value types for map and reduce. The MarkLogic Connector for Hadoop provides MarkLogic specific key and value classes, as follows:

Class	Description
`DocumentURI`	A document URI. Use as a key type with `DocumentInputFormat`, `DocumentOutputFormat`, and `PropertyOutputFormat`.
`MarkLogicNode`	An XML node. Use as a value type with `DocumentInputFormat`, `NodeInputFormat`, `NodeOutputFormat`, and `PropertyOutputFormat`.
`NodePath`	A node URI. Use as a key type with `NodeInputFormat` and `NodeOutputFormat`.

The MarkLogic Connector for Hadoop includes `InputFormat` and `OutputFormat` subclasses which predefine key-value pairs using the types listed above, such as `NodeInputFormat`. See “InputFormat Subclasses” on page 68 and “Using MarkLogic Server for Output” on page 72.

The MarkLogic Server specific types can be used in conjuction with non-connector types, such as `org.apache.hadoop.io.Text`. For example, a job using `NodeInputFormat` always has map input key-value pairs of type `(NodePath, MarkLogicNode)`, but can produce output key-value pairs of type `(Text, IntWritable)`.

For input data, you can also combine the MarkLogic Server specific types with certain Apache Hadoop MapReduce types in the same key-value pair by using `com.marklogic.mapreduce.KeyValueInputFormat` or `com.marklogic.mapreduce.ValueInputFormat`. For details, see "Using KeyValueInputFormat and ValueInputFormat" on page 56.

The key and value types are usually configured programmatically through the `org.apache.hadoop.mapreduce.Job` API. For an example, see "InputFormat Subclasses" on page 68.

1.4 Deploying the Connector with a MarkLogic Server Cluster


This section covers the following topics:

- Relationship of MarkLogic Server to a Hadoop Cluster
- Jobs Use In-Forest Evaluation
- Cluster-wide XDBC Configuration Requirements

For more information about clustering, see Clustering in MarkLogic Server in the *Scalability, Availability, and Failover Guide*.

1.4.1 Relationship of MarkLogic Server to a Hadoop Cluster

Although it is possible to deploy Hadoop MapReduce, HDFS, and MarkLogic Server on a single host for development purposes, production deployments usually involve a Hadoop cluster and a MarkLogic Server cluster, as shown below:

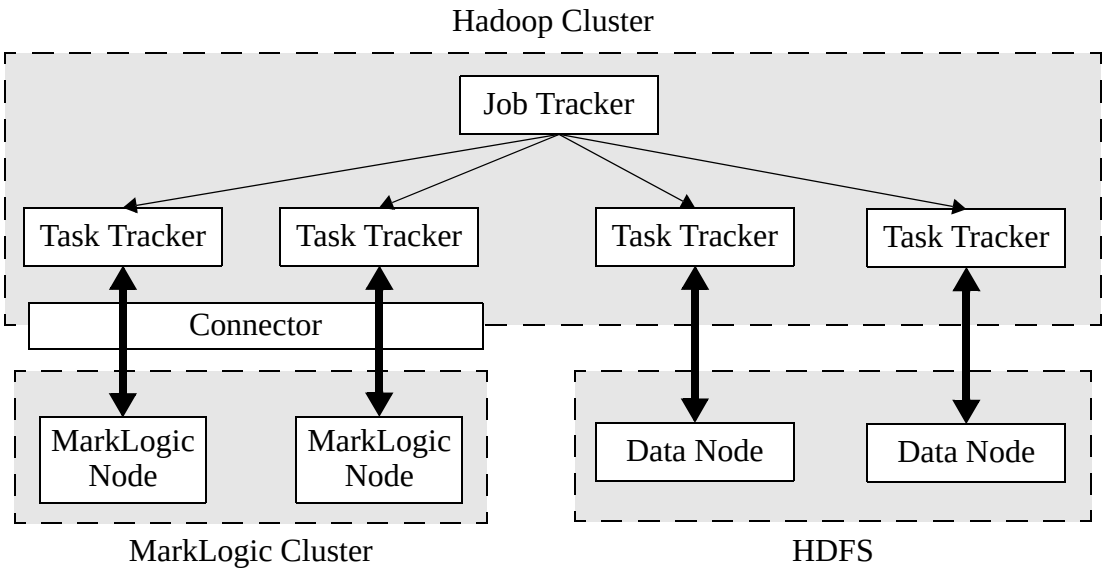

In a typical MapReduce/HDFS production deployment, a MapReduce Task Tracker runs on each data node host, though this is not required.

When using MarkLogic Server in a MapReduce job, whether or not to co-locate a Task Tracker with each MarkLogic Server node is dependent on your workload. Co-location reduces network traffic between the server and the MapReduce tasks, but places a heavier computational and memory burden on the host.

1.4.2 Jobs Use In-Forest Evaluation

To optimize performance, the MarkLogic Connector for Hadoop interacts with MarkLogic Server at the forest level. For example, if the reduce step of a job inserts a document into a MarkLogic Server database, the insert is an in-forest insert.

When MarkLogic Server is deployed across a cluster, the forests of a database can be distributed across multiple nodes. In this case, the in-forest evaluation of MapReduce related queries is also distributed across the MarkLogic Server nodes hosting the forests of the target database.

Therefore, every MarkLogic Server host that has at least one forest in a database used by a MapReduce job must be configured to act as both an e-node and a d-node. That is, each host must be capable of providing both query evaluation and data services. A pure d-node (for example, a host with a very small configured expanded tree cache) is not usable in a MapReduce job.


1.4.3 Cluster-wide XDBC Configuration Requirements

Because the MarkLogic Connector for Hadoop uses an XDBC App Server and in-forest query evaluation, your cluster might need special configuration to support MapReduce jobs.

If MarkLogic Server is used for input, each host that has at least one forest attached to the input database must have an XDBC App Server configured for that database. Additionally, the XDBC App Server must listen on the same port on each host. The same requirement applies to using MarkLogic Server for output. The input App Server, database and port can be the same or different from the output App Server, database and port.

Hosts within a group share the same App Server configuration, so you only need additional App Servers if hosts with forests attached to the input or output database are in multiple groups.

For example, the cluster shown below is properly configured to use Database A as a MapReduce input source. Database A has 3 forests, located on 3 hosts in 2 different groups. Therefore, both Group 1 and Group 2 must make Database A accessible on port 9001.

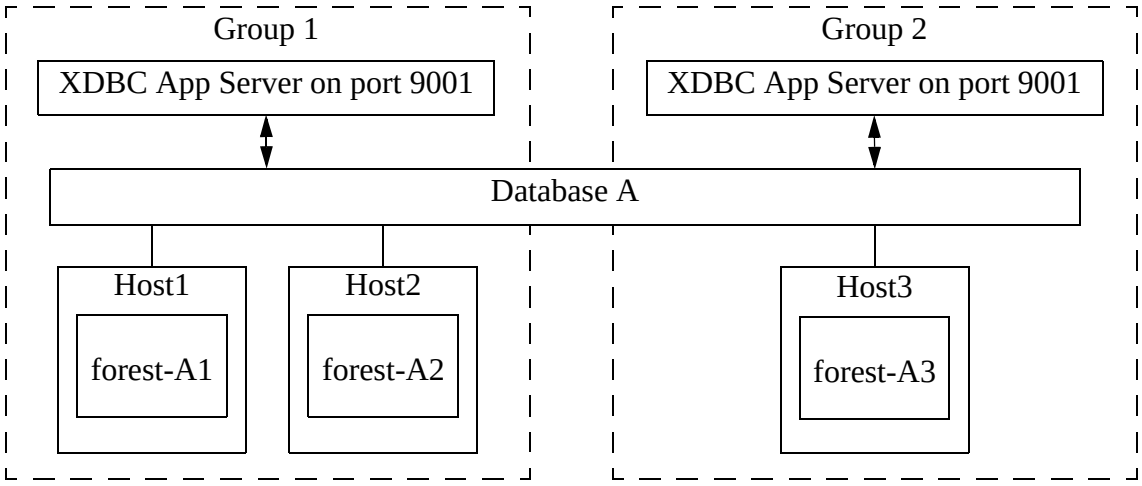

For details about the query evaluation, see “Jobs Use In-Forest Evaluation” on page 12. For information on related MapReduce job configuration properties, see “Identifying the Input MarkLogic Server Instance” on page 36 and “Identifying the Output MarkLogic Server Instance” on page 72.

1.5 Making a Secure Connection to MarkLogic Server with SSL

The MarkLogic Connector for Hadoop supports making secure connections to the input and output MarkLogic Server instances. To configure secure connections:

1. Enable SSL in the App Server, as described in General Procedure for Setting up SSL for an App Server in the *Administrator's Guide*.

2. Create an implementation of the `com.marklogic.mapreduce.SslConfigOptions` interface in your job. Use one of the techniques described in Accessing SSL-Enabled XDBC App Servers in the *XCC Developer's Guide* to provide a `javax.net.ssl.SSLContext` to the MarkLogic Connector for Hadoop.

3. Specify the `SslConfigOptions` subclass name from the previous step in the configuration property(s) `mapreduce.marklogic.input.ssloptionsclass` or `mapreduce.marklogic.output.ssloptionsclass`. See the examples below.

4. Enable SSL use by setting the configuration property(s) `mapreduce.marklogic.input.usessl` or `mapreduce.marklogic.output.usessl` to `true`.

You can set `mapreduce.marklogic.input.ssloptionsclass` and `mapreduce.marklogic.output.ssloptionsclass` either in a configuration file or programmatically. To set the property in a configuration file, set the value to your `SslConfigOptions` class name with ".class" appended to it. For example:

```
<property>
  <name>mapreduce.marklogic.input.ssloptionsclass</name>
```

```
  <value>my.package.MySslOptions.class</value>
</property>
```

To set the property programatically, use the `org.apache.hadoop.conf.Configuration` API. For example:

```
import org.apache.hadoop.conf.Configuration;
import com.marklogic.mapreduce.SslConfigOptions;

public class ContentReader {
    static class MySslOptions implements SslConfigOptions {...}

    public static void main(String[] args) throws Exception {
        Configuration conf = new Configuration();
        ...

        conf.setClass("mapreduce.marklogic.input.ssloptionsclass",
            MySslOptions.class, SslConfigOptions.class);
        ...
    }
}
```

For a complete example of using SSL with the MarkLogic Connector for Hadoop, see “ContentReader” on page 112. For a basic XCC application using SSL, see HelloSecureWorld in the *XCC Developer’s Guide*.

2.0 Getting Started with the MarkLogic Connector for Hadoop

This chapter provides procedures for installing and configuring Apache Hadoop MapReduce and the MarkLogic Connector for Hadoop, and for running a simple MapReduce job that interacts with MarkLogic Server. For more examples, see “Using the Sample Applications” on page 96.

This chapter includes the following sections:

- Requirements
- Installing the MarkLogic Connector for Hadoop
- Configuring Your Environment to Use the Connector
- Running the HelloWorld Sample Application
- Making the Connector Available Across a Hadoop Cluster
- Organization of the Connector Distribution

2.1 Requirements

This section covers the following topics:

- Required Software
- Security Requirements for MapReduce Jobs

2.1.1 Required Software

The MarkLogic Connector for Hadoop is a Java-only API and is only available on Linux. You can use the connector with any of the Hadoop distributions listed below. Though the Hadoop MapReduce Connector is only supported on the Hadoop distributions listed below, it may work with other distributions, such as an equivalent version of Apache Hadoop.

The following software is required to use the Hadoop MapReduce Connector:

- Linux
- MarkLogic Connector for Hadoop
- MarkLogic 5 or later
- MarkLogic XML Content Connector for Java (XCC/J) 5.0 or later
- An installation of one of the following supported Hadoop distributions:
    - Cloudera’s Distribution Including Apache Hadoop (CDH) version 4.3, MRv1 only.
- Java JDK 1.6 or later. The Oracle/Sun JDK is recommended.

Note: Apache Hadoop only supports the Oracle/Sun JDK, though other JDK's may work. For details, see http://wiki.apache.org/hadoop/HadoopJavaVersions.

2.1.2 Security Requirements for MapReduce Jobs

The user with which a MapReduce job accesses MarkLogic Server must have appropriate privileges for the content accessed by the job, such as permission to read or update documents in the target database. Specify the user in the `mapreduce.marklogic.input.username` and `mapreduce.marklogic.output.username` job configuration properties. See "Configuring a MapReduce Job" on page 32.

In addition, the input and output user must use one of the pre-defined roles listed below:

Role	Description
`hadoop-user-read`	Enables use of MarkLogic Server as an input source for a MapReduce job. This role does not grant any other privileges, so the `mapreduce.marklogic.input.user` might still require additional privileges to read content from the target database.
`hadoop-user-write`	Enables use of MarkLogic Server as an output destination for a MapReduce job. This role does not grant any other privileges, so the `mapreduce.marklogic.output.user` might still require additional privileges to insert or update content in the target database.
`hadoop-user-all`	Combines the privileges of `hadoop-user-read` and `hadoop-user-write`.

The `hadoop-internal` role is for internal use only. Do not assign this role to any users. This role is used to amp special privileges within the context of certain functions of the Hadoop MapReduce Connector. Assigning this role to users gives them privileges on the system that you typically do not want them to have.

For details about roles and privileges, see the *Understanding and Using Security Guide*.

2.2 Installing the MarkLogic Connector for Hadoop

This section assumes you have already installed Hadoop, according to the instructions for your distribution. Follow these instructions to install MarkLogic Connector for Hadoop in a single node Hadoop configuration. For information about installation in a Hadoop Cluster, see "Making the Connector Available Across a Hadoop Cluster" on page 23.

These instructions assume you have the following environment variables set:

- `HADOOP_CONF_DIR` : The directory containing your Hadoop Configuration files. This location is dependent on your Hadoop distribution. For example, CDH4 uses `/etc/hadoop/conf`.
- `JAVA_HOME` : The root of your JRE installation.

These instructions are based on using the connector with CDH4. You might need to adjust the instructions based on your Hadoop distribution. To install the MarkLogic Connector for Hadoop:

1. Download the MarkLogic Connector for Hadoop from developer.marklogic.com.

2. Unpack the connector package to a location of your choice. For example, assuming `/space/marklogic` contains the connector zip file and you install the MarkLogic Connector for Hadoop in `/space/marklogic/mapreduce`:

   ```
   $ cd /space/marklogic
   $ mkdir mapreduce; cd mapreduce
   $ unzip ../Connector-for-Hadoop2-2.0.zip
   ```

3. Optionally, set `CONNECTOR_HOME` in your shell environment to facilitate using the example commands in this guide. The MarkLogic Connector for Hadoop installation directory is referred to as `$CONNECTOR_HOME` in this guide. For example:

   ```
   $ export CONNECTOR_HOME=/space/marklogic/mapreduce
   ```

4. If XCC is not already installed, download XCC for Java from developer.marklogic.com and unzip the package to a location of your choice. The installation location, such as `/space/marklogic/xcc`, is referred to as `$XCC_HOME` in this guide.

   ```
   $ cd /space/marklogic
   $ mkdir xcc; cd xcc
   $ unzip ../MarkXCC.Java-7.0.zip
   ```

Hadoop must be configured to find the MarkLogic Connector for Hadoop libraries before you can use MarkLogic Server in a MapReduce job. See “Configuring Your Environment to Use the Connector” on page 17.

2.3 Configuring Your Environment to Use the Connector

Before using the MarkLogic Connector for Hadoop with your Hadoop installation for the first time, modify your Hadoop configuration so that Hadoop can find the connector libraries. Use the following procedure or consult the documentation for your Hadoop distribution.

1. Optionally, set `CONNECTOR_HOME` in your shell environment to facilitate using the example commands in this guide. The MarkLogic Connector for Hadoop installation directory is referred to as `$CONNECTOR_HOME` in this guide. For example:

```
$ export CONNECTOR_HOME=/space/marklogic/mapreduce
```

2. Set `HADOOP_CLASSPATH` in your shell environment to include the MarkLogic Connector for Hadoop and XCC jar files. For example, if using MarkLogic 7 and CDH 4.3 MRv1, the required libraries are:

   - `$CONNECTOR_HOME/lib/commons-modeler-2.0.1.jar`
   - `$CONNECTOR_HOME/lib/marklogic-mapreduce2-2.0.2.jar`
   - `$XCC_HOME/lib/marklogic-xcc-7.0.jar`

   For example, on Linux, use the following command (all on one line, with no whitespace):

```
export HADOOP_CLASSPATH=
  $CONNECTOR_HOME/lib/commons-modeler-2.0.1.jar:
  $CONNECTOR_HOME/lib/marklogic-mapreduce2-2.0.2.jar:
  $XCC_HOME/lib/marklogic-xcc-7.0.jar
```

3. Optionally, set a `LIBJARS` variable in your shell environment to the same jar files you specified in `HADOOP_CLASSPATH`, but separated by commas. This variable is used for the value of the Hadoop `-libjars` option. For example, you can use the following command on Linux (all on one line, with no whitespace):

```
export LIBJARS=
  $CONNECTOR_HOME/lib/commons-modeler-2.0.1.jar,
  $CONNECTOR_HOME/lib/marklogic-mapreduce2-2.0.2.jar,
  $XCC_HOME/lib/marklogic-xcc-7.0.jar
```

   Note: The jar file names can vary across MarkLogic Server releases.

Apache Hadoop MapReduce and the MarkLogic Connector for Hadoop are now ready for use.

2.4 Running the HelloWorld Sample Application

The section walks through configuring and running a simple HelloWorld sample job, assuming MarkLogic Server and Apache Hadoop are installed on the same single node, as described in “Installing the MarkLogic Connector for Hadoop” on page 16.

The following steps are covered:


- Creating the App Server and Database
- Loading the Sample Data
- Configuring the Job
- Running the Job

2.4.1 Creating the App Server and Database

Before running the sample application, create a database and an XDBC App Server. This guide assumes a database named “hello-hadoop” and an App Server on port 9001. For detailed instructions on creating databases and App Servers, see the *Administrator’s Guide*.

To create the database and App Server:

1. Open the Admin Interface to MarkLogic Server in your browser.
2. Create a forest named “hello-hadoop-1” using the default settings.
3. Create a database named “hello-hadoop” using the default settings.
4. Attach the “hello-hadoop-1” forest to the “hello-hadoop” database.
5. Go to the database configuration page for the “hello-hadoop” database and set the “directory creation” option to “manual”. The MarkLogic Connector for Hadoop requires this when inserting documents into the database.
6. Create an XDBC App Server named “hello-hadoop-xdbc”, attached to the hello-hadoop database. You may use any root and port number. This guide assumes these settings:

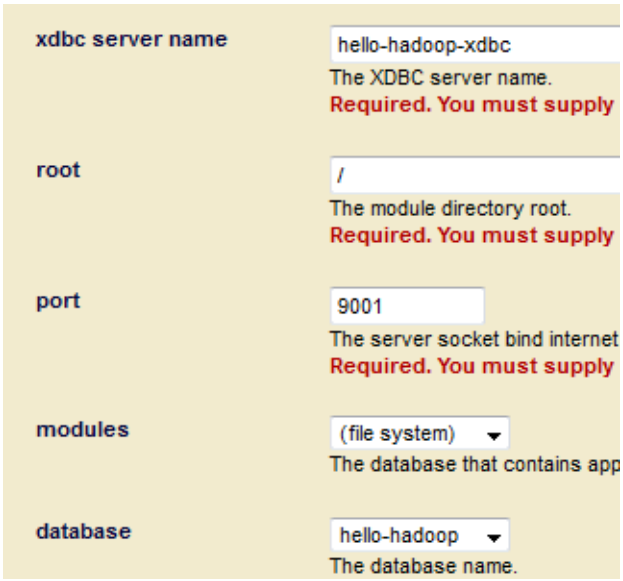

2.4.2 Loading the Sample Data

This section covers loading the sample data in two ways: Using Query Console to load the data using simple XQuery, or using Hadoop and the MarkLogic Content Pump (mlcp) command.

- Loading Sample Data with mlcp

- Loading Sample Data Manually

2.4.3 Loading Sample Data with mlcp

Follow these instructions to initialize the "hello-hadoop" database using MarkLogic Content Pump (mlcp).

1. Create a text file called "hello.xml" with the contents shown below:

```
<data><child>hello mom</child></data>
```

2. Create a text file called "world.xml" with the contents shown below:

```
<data><child>world event</child></data>
```

3. Create a directory called "hello-hadoop" under `/user/your_username` in HDFS to hold the input files. For example:

```
$ hadoop dfs -mkdir /user/me/hello-hadoop
```

4. Copy the input files into HDFS under the hello-hadoop directory created in the previous step. For example:

```
$ hadoop dfs -put hello.xml /user/me/hello-hadoop
$ hadoop dfs -put world.xml /user/me/hello-hadoop
```

5. Use mlcp to load the input files into the database you created in "Creating the App Server and Database" on page 19. Use a username and password with update privileges for the input database. Use the port number of the XDBC App Server you previously created. Use the `-output_uri_replace` option to strip off the directory prefix from the database document URI. For example:

```
$ mlcp.sh import -username user -password password -host localhost \
    -port 8008 hdfs:/user/me/hello-hadoop \
    -output_uri_replace "/user/me/hello-hadoop/,''"
```

6. Optionally, use Query Console to confirm the load: Open Query Console and click the Explore button at the top of the query editor to examine the database contents. You should see `hello.xml` and `world.xml` in the database.

You can also use mlcp to load data from the local filesystem instead of from HDFS. To do so, replace Steps 3-5 with an mlcp command of the following form. Replace `your_input_dir` with the directory containing hello.xml and world.xml.

```
$ mlcp.sh import -username user -password password -host localhost \
    -port 8008 -mode local -input_file_path your_input_dir \
    -output_uri_replace "your_input_dir/,''"
```

2.4.4 Loading Sample Data Manually

Follow these instructions to initialize the "hello-hadoop" database with the input documents using Query Console. For details about Query Console, see the *Query Console User's Guide*.

To load the database with the sample data:

1. Using your browser, launch Query Console on the MarkLogic Server instance to be used as an input source. For example, if the input XDBC App Server is running on `myhost`, visit this URL in the browser:

   ```
   http://myhost:8000/qconsole
   ```

2. Create a new query in Query Console and replace the default contents with the following:

   ```
   xquery version "1.0-ml";

   let $hello := <data><child>hello mom</child></data>
   let $world := <data><child>world event</child></data>

   return(
     xdmp:document-insert("hello.xml", $hello),
     xdmp:document-insert("world.xml", $world)
   )
   ```

3. In the `Content Source` dropdown, select the input XDBC App Server you configured for input in "Creating the App Server and Database" on page 19.

4. Select `Text` as the output format and click Run to execute the query.

5. Click the Explore button at the top of the query editor to examine the database contents. You should see `hello.xml` and `world.xml` in the database.

2.4.5 Configuring the Job

Before running the `HelloWorld` sample job, set the connector configuration properties that identify the MarkLogic Server user and instance for input and output. Although the input and output MarkLogic Server instances and users can be different, this example configures the job to use the host and port of the `hello-hadoop-xdbc` App Server created in "Creating the App Server and Database" on page 19 for both input and output.

Configuration also includes an input and an output user name. Choose or create a user with sufficient privileges to access the `hello-hadoop-xdbc` App Server, and read and insert documents in the `hello-hadoop` database. If using a non-admin user, assign the user to the `hadoop-user-all` role. For details, see "Security Requirements for MapReduce Jobs" on page 16.

To configure the job:

1. Copy the `marklogic-hello-world.xml` configuration file from `$CONNECTOR_HOME/conf` to `$HADOOP_CONF_DIR`. For example:

```
$ cp $CONNECTOR_HOME/conf/marklogic-hello-world.xml $HADOOP_CONF_DIR
```

2. Edit `$HADOOP_CONF_DIR/marklogic-hello-world.xml` to configure your input and output host name, port, user name, and password. Set the following parameters to match your environment:

```
mapreduce.marklogic.input.username
mapreduce.marklogic.input.password
mapreduce.marklogic.input.host
mapreduce.marklogic.input.port
mapreduce.marklogic.output.username
mapreduce.marklogic.output.password
mapreduce.marklogic.output.host
mapreduce.marklogic.output.port
```

   The configured input user must have sufficient privileges to access the XDBC App Server identified by the input host/port and to read documents from the input database.

   The configured output user must have sufficient privileges to access the XDBC App Server identified by the output host/port and to insert documents in the output database.

2.4.6 Running the Job

The `HelloWorld` sample reads the first word of text from the input documents, concatenates the words into a string, and saves the result as `HelloWorld.txt`. Assuming the database contains only the documents created in “Loading the Sample Data” on page 19, the output document contains the phrase “hello world”. If your database contains additional documents, you get different results.

To view the sample code, see `$CONNECTOR_HOME/src/com/marklogic/mapreduce/examples`.

Ensure the `hadoop` command is in your path, then use the following command line to run the HelloWorld job. Modify the connector JAR file name, as needed for your installation. If you are using CDH, the `hadoop` command is in `/usr/bin`.

```
hadoop jar \
  $CONNECTOR_HOME/lib/marklogic-mapreduce-examples-version.jar \
  com.marklogic.mapreduce.examples.HelloWorld -libjars $LIBJARS
```

As the job runs, Hadoop reports the job progress to stdout. If the sample job does not run or does not produce the expected results, see “Troubleshooting and Debugging” on page 94.

Near the end of the job output, you should see text similar to the following. Notice there are 2 map input records (`hello.xml` and `world.xml`), 2 map output records (the first word from each input record), and 1 reduce output record (`HelloWorld.txt`).

```
INFO mapred.JobClient:  map 100% reduce 100%
INFO mapred.JobClient: Job complete: job_local_0001
INFO mapred.JobClient: Counters: 12
INFO mapred.JobClient:   FileSystemCounters
INFO mapred.JobClient:     FILE_BYTES_READ=56115
INFO mapred.JobClient:     FILE_BYTES_WRITTEN=101467
INFO mapred.JobClient:   Map-Reduce Framework
INFO mapred.JobClient:     Combine output records=0
INFO mapred.JobClient:     Map input records=2
INFO mapred.JobClient:     Reduce shuffle bytes=0
INFO mapred.JobClient:     Reduce output records=1
INFO mapred.JobClient:     Spilled Records=4
INFO mapred.JobClient:     Map output bytes=20
INFO mapred.JobClient:     Combine input records=0
INFO mapred.JobClient:     Map output records=2
INFO mapred.JobClient:     Reduce input records=2
```

Use Query Console to explore the output database and examine the output document, `HelloWorld.txt`. The document should contain the phrase “hello world”.

If you do not see the expected output, see the tips in “Troubleshooting and Debugging” on page 94.

2.5 Making the Connector Available Across a Hadoop Cluster

When you submit a MapReduce job to run on an Apache Hadoop cluster, the job resources must be accessible by the master Job Tracker node and all worker nodes. Job resources include the job JAR file, configuration files, and all dependent libraries. When you use the MarkLogic Connector for Hadoop in your job, this includes the connector and XCC JAR files.

You must always have the job resources available on the Hadoop node where you launch the job. Depending on the method you use to make the job resource available across the cluster, dependent JAR files, such as the MarkLogic Connector for Hadoop libraries must be on the HADOOP_CLASSPATH on the node where you launch the job, as described in “Configuring Your Environment to Use the Connector” on page 17.

Hadoop offers many options for making job resources available to the worker nodes, including:

- Using the `-libjars` Hadoop command line option and parsing the options in your main class using `org.apache.hadoop.util.GenericOptionsParser`.
- Bundling dependent libraries and other resources into your job JAR file.
- Storing dependent libraries and other resources in HDFS or other shared file system and using the Apache Hadoop DistributedCache to locate and load them.
- Installing required software on all nodes in the cluster.

The best solution depends upon the needs of your application and environment. See the Apache Hadoop documentation for more details on making resources available across a Hadoop cluster. This guide uses `-libjars`.

2.6 Organization of the Connector Distribution

The MarkLogic Connector for Hadoop distribution has the following layout:

Document or Directory	Description
`conf/`	The XML config files for the sample applications. For details, see “Using the Sample Applications” on page 96.
`docs/`	The Javadoc for the connector in both expanded HTML and compressed zip format.
`lib/`	The connector and connector examples jar files, `marklogic-mapreduce2-2.0.2.jar` and `marklogic-mapreduce-examples-2.0.2.jar`. Note that the jar file names include the version number, so the names in your installation might be slightly different.
`src/`	The source code for the sample applications.
`Readme.txt`	Includes the connector version number and any last-minute updates not included in the documentation.

3.0 Apache Hadoop MapReduce Concepts

This chapter provides a very brief introduction to Apache Hadoop MapReduce. If you are already familiar with Apache Hadoop MapReduce, skip this chapter. For a complete discussion of the MapReduce and the Hadoop framework, see the Hadoop documentation, available from the Apache Software Foundation at http://hadoop.apache.org

This chapter covers the following topics:

- MapReduce Overview
- Example: Calculating Word Occurrences
- Understanding the MapReduce Job Life Cycle
- How Hadoop Partitions Map Input Data
- Configuring a MapReduce Job
- Running a MapReduce Job
- Viewing Job Status and Logs

3.1 MapReduce Overview

Apache Hadoop MapReduce is a framework for processing large data sets in parallel across a Hadoop cluster. Data analysis uses a two step map and reduce process. The job configuration supplies map and reduce analysis functions and the Hadoop framework provides the scheduling, distribution, and parallelization services.


The top level unit of work in MapReduce is a job. A job usually has a map and a reduce phase, though the reduce phase can be omitted. For example, consider a MapReduce job that counts the number of times each word is used across a set of documents. The map phase counts the words in each document, then the reduce phase aggregates the per-document data into word counts spanning the entire collection.

During the map phase, the input data is divided into input splits for analysis by map tasks running in parallel across the Hadoop cluster. By default, the MapReduce framework gets input data from the Hadoop Distributed File System (HDFS). Using the MarkLogic Connector for Hadoop enables the framework to get input data from a MarkLogic Server instance. For details, see “Map Task” on page 30.

The reduce phase uses results from map tasks as input to a set of parallel reduce tasks. The reduce tasks consolidate the data into final results. By default, the MapReduce framework stores results in HDFS. Using the MarkLogic Connector for Hadoop enables the framework to store results in a MarkLogic Server instance. For details, see “Reduce Task” on page 30.

Although the reduce phase depends on output from the map phase, map and reduce processing is not necessarily sequential. That is, reduce tasks can begin as soon as any map task completes. It is not necessary for all map tasks to complete before any reduce task can begin.

MapReduce operates on key-value pairs. Conceptually, a MapReduce job takes a set of input key-value pairs and produces a set of output key-value pairs by passing the data through map and reduce functions. The map tasks produce an intermediate set of key-value pairs that the reduce tasks uses as input. The diagram below illustrates the progression from input key-value pairs to output key-value pairs at a high level:



Though each set of key-value pairs is homogeneous, the key-value pairs in each step need not have the same type. For example, the key-value pairs in the input set (KV1) can be `(string, string)` pairs, with the map phase producing `(string, integer)` pairs as intermediate results (KV2), and the reduce phase producing `(integer, string)` pairs for the final results (KV3). See "Example: Calculating Word Occurrences" on page 27.

The keys in the map output pairs need not be unique. Between the map processing and the reduce processing, a shuffle step sorts all map output values with the same key into a single reduce input `(key, value-list)` pair, where the "value" is a list of all values sharing the same key. Thus, the input to a reduce task is actually a set of `(key, value-list)` pairs.

The key and value types at each stage determine the interfaces to your map and reduce functions. Therefore, before coding a job, determine the data types needed at each stage in the map-reduce process. For example:

1. Choose the reduce output key and value types that best represents the desired outcome.

2. Choose the map input key and value types best suited to represent the input data from which to derive the final result.

3. Determine the transformation necessary to get from the map input to the reduce output, and choose the intermediate map output/reduce input key value type to match.

Control MapReduce job characteristics through configuration properties. The job configuration specifies:

- how to gather input
- the types of the input and output key-value pairs for each stage
- the map and reduce functions
- how and where to store the final results


For more information on job configuration, see "Configuring a MapReduce Job" on page 32. For information on MarkLogic specific configuration properties, see "Input Configuration Properties" on page 66 and "Output Configuration Properties" on page 86.

3.2 Example: Calculating Word Occurrences

This example demonstrates the basic MapReduce concept by calculating the number of occurrence of each each word in a set of text files. For an in-depth discussion and source code for an equivalent example, see the Hadoop MapReduce tutorial at:


http://hadoop.apache.org/mapreduce/docs/current/mapred_tutorial.html

Recall that MapReduce input data is divided into input splits, and the splits are further divided into input key-value pairs. In this example, the input data set is the two documents, `document1` and `document2`. The `InputFormat` subclass divides the data set into one split per document, for a total of 2 splits:

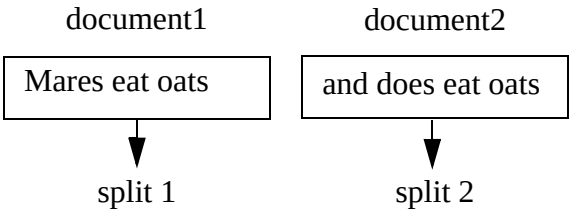


A `(line number, text)` key-value pair is generated for each line in an input document. The map function discards the line number and produces a per-line `(word, count)` pair for each word in the input line. The reduce phase produces `(word, count)` pairs representing aggregated word counts across all the input documents.

Given the input data shown above, the map-reduce progression for the example job is:

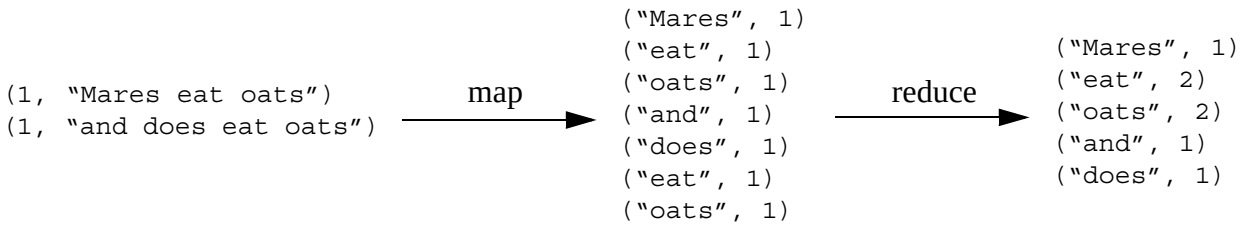

The output from the map phase contains multiple key-value pairs with the same key: The "oats" and "eat" keys appear twice. Recall that the MapReduce framework consolidates all values with the same key before entering the reduce phase, so the input to reduce is actually `(key, values)` pairs. Therefore, the full progression from map output, through reduce, to final results is:

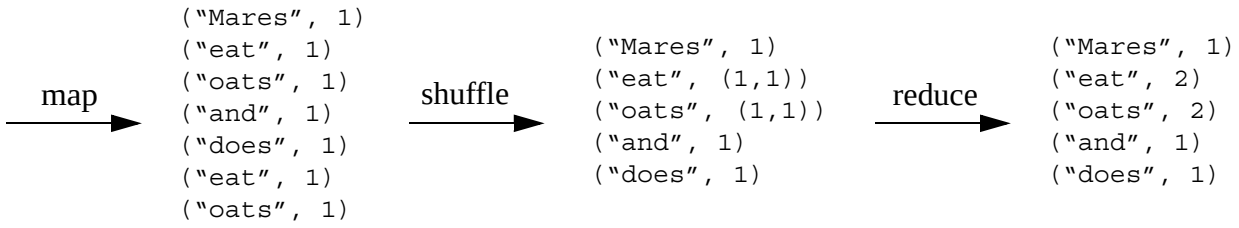

3.3 Understanding the MapReduce Job Life Cycle

This section briefly sketches the life cycle of a MapReduce job and the roles of the primary actors in the life cycle. The full life cycle is much more complex. For details, refer to the documentation for your Hadoop distribution or the Apache Hadoop MapReduce documentation.

Though other configurations are possible, a common Hadoop cluster configuration is a single master node where the Job Tracker runs, and multiple worker nodes, each running a Task Tracker. The Job Tracker node can also be a worker node.

When the user submits a MapReduce job to Hadoop:

1. The local Job Client prepares the job for submission and hands it off to the Job Tracker.

2. The Job Tracker schedules the job and distributes the map work among the Task Trackers for parallel processing.

3. Each Task Tracker spawns a Map Task. The Job Tracker receives progress information from the Task Trackers.

4. As map results become available, the Job Tracker distributes the reduce work among the Task Trackers for parallel processing.

5. Each Task Tracker spawns a Reduce Task to perform the work. The Job Tracker receives progress information from the Task Trackers.

All map tasks do not have to complete before reduce tasks begin running. Reduce tasks can begin as soon as map tasks begin completing. Thus, the map and reduce steps often overlap.

3.3.1 Job Client

The Job Client prepares a job for execution.When you submit a MapReduce job to Hadoop, the local JobClient:

1. Validates the job configuration.

2. Generates the input splits. See “How Hadoop Partitions Map Input Data” on page 31.

3. Copies the job resources (configuration, job JAR file, input splits) to a shared location, such as an HDFS directory, where it is accessible to the Job Tracker and Task Trackers.

4. Submits the job to the Job Tracker.

3.3.2 Job Tracker

The Job Tracker is responsible for scheduling jobs, dividing a job into map and reduce tasks, distributing map and reduce tasks among worker nodes, task failure recovery, and tracking the job status. Job scheduling and failure recovery are not discussed here; see the documentation for your Hadoop distribution or the Apache Hadoop MapReduce documentation.

When preparing to run a job, the Job Tracker:

1. Fetches input splits from the shared location where the Job Client placed the information.

2. Creates a map task for each split.

3. Assigns each map task to a Task Tracker (worker node).

The Job Tracker monitors the health of the Task Trackers and the progress of the job. As map tasks complete and results become available, the Job Tracker:

1. Creates reduce tasks up to the maximum enableed by the job configuration.

2. Assigns each map result partition to a reduce task.

3. Assigns each reduce task to a Task Tracker.

A job is complete when all map and reduce tasks successfully complete, or, if there is no reduce step, when all map tasks successfully complete.

3.3.3 Task Tracker

A Task Tracker manages the tasks of one worker node and reports status to the Job Tracker. Often, the Task Tracker runs on the associated worker node, but it is not required to be on the same host.

When the Job Tracker assigns a map or reduce task to a Task Tracker, the Task Tracker:

1. Fetches job resources locally.

2. Spawns a child JVM on the worker node to execute the map or reduce task.

3. Reports status to the Job Tracker.

The task spawned by the Task Tracker runs the job's map or reduce functions.

3.3.4 Map Task

The Hadoop MapReduce framework creates a map task to process each input split. The map task:

1. Uses the `InputFormat` to fetch the input data locally and create input key-value pairs.
2. Applies the job-supplied map function to each key-value pair.
3. Performs local sorting and aggregation of the results.
4. If the job includes a `Combiner`, runs the `Combiner` for further aggregation.
5. Stores the results locally, in memory and on the local file system.
6. Communicates progress and status to the Task Tracker.

Map task results undergo a local sort by key to prepare the data for consumption by reduce tasks. If a `Combiner` is configured for the job, it also runs in the map task. A `Combiner` consolidates the data in an application-specific way, reducing the amount of data that must be transferred to reduce tasks. For example, a Combiner might compute a local maximum value for a key and discard the rest of the values. The details of how map tasks manage, sort, and shuffle results are not covered here. See the documentation for your Hadoop distribution or the Apache Hadoop MapReduce documentation.

When a map task notifies the Task Tracker of completion, the Task Tracker notifies the Job Tracker. The Job Tracker then makes the results available to reduce tasks.

3.3.5 Reduce Task

The reduce phase aggregates the results from the map phase into final results. Usually, the final result set is smaller than the input set, but this is application dependent. The reduction is carried out by parallel reduce tasks. The reduce input keys and values need not have the same type as the output keys and values.

> **Note:** The reduce phase is optional. You may configure a job to stop after the map phase completes. For details, see “Configuring a Map-Only Job” on page 34.

Reduce is carried out in three phases, copy, sort, and merge. A reduce task:

1. Fetches job resources locally.
2. Enters the copy phase to fetch local copies of all the assigned map results from the map worker nodes.
3. When the copy phase completes, executes the sort phase to merge the copied results into a single sorted set of `(key, value-list)` pairs.

4. When the sort phase completes, executes the reduce phase, invoking the job-supplied reduce function on each `(key, value-list)` pair.

5. Saves the final results to the output destination, such as HDFS.


The input to a reduce function is key-value pairs where the value is a list of values sharing the same key. For example, if one map task produces a key-value pair `("eat", 2)` and another map task produces the pair `("eat", 1)`, then these pairs are consolidated into `("eat", (2, 1))` for input to the reduce function. If the purpose of the reduce phase is to compute a sum of all the values for each key, then the final output key-value pair for this input is `("eat", 3)`. For a more complete example, see "Example: Calculating Word Occurrences" on page 27.

Output from the reduce phase is saved to the destination configured for the job, such as HDFS or MarkLogic Server. Reduce tasks use an `OutputFormat` subclass to record results. The Hadoop API provides `OutputFormat` subclasses for using HDFS as the output destination. The MarkLogic Connector for Hadoop provides `OutputFormat` subclasses for using a MarkLogic Server database as the destination. For a list of available subclasses, see "OutputFormat Subclasses" on page 91. The connector also provides classes for defining key and value types; see "MarkLogic-Specific Key and Value Types" on page 10.

3.4 How Hadoop Partitions Map Input Data

When you submit a job, the MapReduce framework divides the input data set into chunks called *splits* using the `org.apache.hadoop.mapreduce.InputFormat` subclass supplied in the job configuration. Splits are created by the local Job Client and included in the job information made available to the Job Tracker.

The JobTracker creates a map task for each split. Each map task uses a `RecordReader` provided by the `InputFormat` subclass to transform the split into input key-value pairs. The diagram below shows how the input data is broken down for analysis during the map phase:

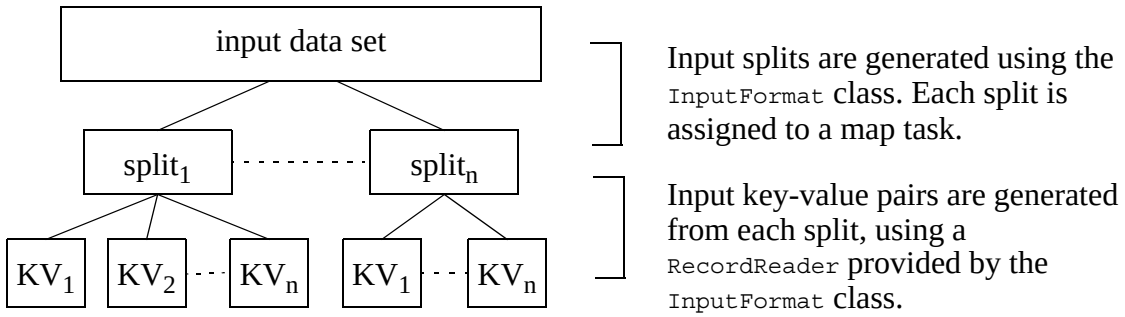

The Hadoop API provides `InputFormat` subclasses for using HDFS as an input source. The MarkLogic Connector for Hadoop provides `InputFormat` subclasses for using MarkLogic Server as an input source. For a list of available MarkLogic-specific subclasses, see "InputFormat Subclasses" on page 68.

3.5 Configuring a MapReduce Job

This section covers the following topics:

- Configuration Basics
- Setting Properties in a Configuration File
- Setting Properties Using the Hadoop API
- Setting Properties on the Command Line
- Configuring a Map-Only Job

3.5.1 Configuration Basics

Hadoop configuration is controlled by multiple layers of configuration files and property settings. You may set configuration properties in configuration files, programmatically, and on the command line. For details, see the documentation for your Hadoop distribution, or the Apache Hadoop MapReduce documentation at http://hadoop.apache.org.

Configuration properties can include the following:

- Hadoop MapReduce properties
- Application-specific properties, such as the properties defined by the MarkLogic Connector for Hadoop API in `com.marklogic.mapreduce.MarkLogicConstants`
- Job-specific properties. For example, the `mapreduce.linkcount.baseuri` property used by the `LinkCountInDoc` sample application

A MapReduce application must configure at least the following:

- Mapper: Define a subclass of `org.apache.hadoop.mapreduce.Mapper`, usually overriding at least the `Map.map()` method.
- InputFormat: Select a subclass of `org.apache.hadoop.mapreduce.InputFormat` and pass it to `org.apache.hadoop.mapreduce.Job.setInputFormatClass`.

If the job includes a reduce step, then the application must also configure the following:

- Reducer: Define a subclass of `org.apache.hadoop.mapreduce.Reducer`, usually overriding at least the `Reducer.reduce()` method.
- OutputFormat: Select a subclass of `org.apache.hadoop.mapreduce.OutputFormat` and pass it to `org.apache.hadoop.mapreduce.Job.setOutputFormatClass`.
- Output key and value types for the map and reduce phases. Set the key and value types appropriate for your `InputFormat` and `OutputFormat` subclasses using the Job API functions, such as `org.apache.hadoop.mapreduce.Job.setMapOutputKeyClass`.

For details about configuring MapReduce jobs, see the documentation for your Hadoop distribution. For details about connector-specific configuration options, see “Using MarkLogic Server for Input” on page 36 and “Using MarkLogic Server for Output” on page 72.

3.5.2 Setting Properties in a Configuration File

Configuration files are best suited for static configuration properties. By default, Apache Hadoop looks for configuration files in `$HADOOP_CONF_DIR`. You may override this location on the hadoop command line. Consult the documentation for your Hadoop distribution for the proper location, or see the Apache Hadoop Commands Guide at http://hadoop.apache.org.

Job configuration files are XML files with the following layout:

```
<?xml version="1.0"?>
<?xml-stylesheet type="text/xsl" href="configuration.xsl?>
<configuration>
  <property>
    <name>the.property.name</name>
    <value>the.property.value</value>
  </property>
  <property>...</property>
</configuration>
```

3.5.3 Setting Properties Using the Hadoop API

You can use the Apache Hadoop API to set properties that cannot be set in a configuration file or that have dynamically calculated values. For example, you can set the `InputFormat` class by calling `org.apache.hadoop.mapreduce.Job.setInputFormatClass`.

Set properties prior to submitting the job. That is, prior to calling `org.apache.mapreduce.Job.submit` or `org.apache.mapreduce.Job.waitForCompletion`.

To set an arbitrary property programmatically, use the `org.apache.hadoop.conf.Configuration` API. This API includes methods for setting property values to string, boolean, numeric, and class types. Set the properties prior to starting the job. For example, to set the MarkLogic Connector for Hadoop `marklogic.mapreduce.input.documentselector` property, at runtime, you can do the following:

```
import org.apache.hadoop.conf.Configuration;
import org.apache.hadoop.mapreduce.Job;
import com.marklogic.mapreduce.MarkLogicConstants;
...
public class myJob { ...
  public static void main(String[] args) throws Exception {
    Configuration conf = new Configuration();
    String[] otherArgs =
        new GenericOptionsParser(conf, args).getRemainingArgs();
    Job job = new Job(conf);

    // Build up the document selectory dynamically...
```

```
        String mySelector = ...;

        conf = job.getConfiguration();
        conf.set(MarkLogicConstants.DOCUMENT_SELECTOR, mySelector);
        ...
        System.exit(job.waitForCompletion(true) ? 0 : 1);
    }
}
```

3.5.4 Setting Properties on the Command Line

You can set properties on the hadoop command line using the `-D` command line option. For example:

```
$ hadoop -Dproperty_name=value jar myJob.jar myClass
```

3.5.5 Configuring a Map-Only Job

Some jobs can complete all their work during the map phase. For example, the ContentLoader sample application, which loads documents from HDFS into MarkLogic Server, performs document loading in the map tasks and then stops without using reduce tasks. See “ContentLoader” on page 113.

To stop a job after the map completes, set the number of reduce tasks to zero by setting the property `mapred.reduce.tasks` to 0 in your job configuration file, or by calling `org.apache.hadoop.Configuration.setNumReduceTasks(0)` in your application.

3.6 Running a MapReduce Job

Use the `hadoop jar` command to execute a job. For example:

```
$ hadoop jar /path/myJob.jar my.package.Class options
```

For specific examples, see “Using the Sample Applications” on page 96. For details about the hadoop command line, consult the documentation for your Hadoop distribution or see the Apache Hadoop MapReduce Command Guide at http://hadoop.apache.org.

3.7 Viewing Job Status and Logs

A running job reports progress and errors to stdout and stderr. If Hadoop is configured for standalone mode, this output is all that is available. If Hadoop is configured in pseudo-distributed or fully distributed mode, logs are recorded in the Hadoop logs directory by default. The location of the logs directory is dependent on your Hadoop distribution. You can also view job status and results using the Job Tracker and NameNode web consoles.

This section assumes your Hadoop distribution uses the same logging mechanism as Apache Hadoop. Consult the documentation for your distribution for details.

Use the Job Tracker web console to view job status. By default, the Job Tracker console is available on port 50030. For example:

```
http://localhost:50030
```

Use the NameNode web console to browse HDFS, including job results, and to look at job related logs. By default, the NameNode console is available on port 50070. For example:

```
http://localhost:50070
```

To examine logs for a job:

1. Navigate to the NameNode console on port 50070.
2. Click the Namenode Logs link at the top of the page. A listing of the logs directory appears.
3. To check for errors, click on a Job Tracker log file, such as `hadoop-your_username-jobtracker-your_hostname.log`. The contents of the log file appears.
4. Click on your browser Back button to return to the log directory listing.
5. To view output output from your job, click on userlogs at the bottom of the logs directory listing. A user log listing appears.
6. Locate the run corresponding to your job by looking at the timestamps. A log directory is created for each map task and each reduce task.

   Map tasks have _m_ in the log directory name. Reduce tasks have _r_ in the log directory name. For example, `attempt_201111020908_0001_m_000001_0/` represents a map task.
7. Click on the map or reduce task whose output you want to examine. A directory listing of the stdout, stderr, and syslog for the select task.
8. Click on the name of a log to see what the task output to that destination. For example, click stderr to view text written to stderr by the task.

4.0 Using MarkLogic Server for Input

When using MarkLogic Server as an input source, the input key-value pairs passed to the map function of a map task are constructed by transforming database fragments or lexicon data in the input split into key-value pairs using the configured `InputFormat` subclass and input properties. This section covers the following topics:

- Basic Steps
- Basic Input Mode
- Advanced Input Mode
- Using KeyValueInputFormat and ValueInputFormat
- Configuring a Map-Only Job
- Direct Access Using ForestInputFormat
- Input Configuration Properties
- InputFormat Subclasses

4.1 Basic Steps

To configure the map phase of a MapReduce job to use MarkLogic Server for input, perform the following steps:

- Identifying the Input MarkLogic Server Instance
- Specifying the Input Mode
- Specifying the Input Key and Value Types
- Defining the Map Function

4.1.1 Identifying the Input MarkLogic Server Instance

The MarkLogic Server input instance is identified by setting job configuration properties. For general information on setting configuration properties, see “Configuring a MapReduce Job” on page 32.

Specify the following properties to identify the input MarkLogic Server instance:

Property	Description
`mapreduce.marklogic.input.host`	Hostname or IP address of the server hosting your input XDBC App Server. The host must be resolvable by the nodes in your Hadoop cluster, so you should usually not use "local-host".
`mapreduce.marklogic.input.port`	The port configured for the target XDBC App Server on the input host.
`mapreduce.marklogic.input.username`	Username privileged to read from the database attached to your XDBC App Server.
`mapreduce.marklogic.input.password`	Cleartext password for the `input.username` user.

When you use MarkLogic Server in a cluster, all MarkLogic Server hosts containing a forest in the input database must be accessible through an XDBC server on the same port. The host identified in the configuration properties may be any qualifying host in the cluster. For details, see "Deploying the Connector with a MarkLogic Server Cluster" on page 11.

You can configure a job to connect to the App Server through SSL by setting the `mapreduce.marklogic.input.usessl` property. For details, see "Making a Secure Connection to MarkLogic Server with SSL" on page 13. For an example, see "ContentReader" on page 112.

For more information on the properties, see "Input Configuration Properties" on page 66.

4.1.2 Specifying the Input Mode

The MarkLogic Connector for Hadoop input mode determines how much responsibility your job has for creating input splits and input key-value pairs. The MarkLogic Connector for Hadoop supports basic and advanced input modes. Basic mode is the default. Set the input mode using the `mapreduce.marklogic.input.mode` configuration property.

When MarkLogic Server is the input source, each map task runs an input query against the task input split to select the fragments or records from which to create map input key-value pairs. An *input split query* divides the input content into input splits by forest, and an *input query* selects content within the split. For a general discussion of input splits in MapReduce, see "How Hadoop Partitions Map Input Data" on page 31.

In basic mode, the MarkLogic Connector for Hadoop uses a built-in input split query and builds the input query based on data selection properties defined by your job. This enables the connector to optimize the interaction between the Hadoop MapReduce framework and MarkLogic Server. If your input selection needs can be met by the basic mode query construction properties, you should use basic mode as it offers the best performance. For details, see "Basic Input Mode" on page 40.

Basic mode supports selecting input data from documents or a lexicon. You can only use one of these methods in a job. If configuration properties are set for both methods, the connector uses a lexicon for input. If none of the input selection properties are set, the connector uses the default document selectors.

In advanced mode, your application provides the input split query and input query. Using advanced mode gives you complete control over map input key-value pair creation, but adds complexity. For details, see "Advanced Input Mode" on page 50.

4.1.3 Specifying the Input Key and Value Types

As discussed in "How Hadoop Partitions Map Input Data" on page 31, the `org.apache.hadoop.mapreduce.InputFormat` subclass configured for the job determines the types of the input keys and values and how the content selected by the input query is transformed into key-value pairs.

To specify the `InputFormat` subclass programmatically, use the `org.apache.hadoop.mapreduce.Job` API. The following example configures the job to use `NodeInputFormat`, which creates `(NodePath, MarkLogicNode)` input key-value pairs:

```
import com.marklogic.mapreduce.NodeInputFormat;
import org.apache.hadoop.mapreduce.Job;
...
public class LinkCountInDoc {
    ...
    public static void main(String[] args) throws Exception {
        Job job = new Job(conf);
        job.setInputFormatClass(NodeInputFormat.class);
        ...
    }
}
```

The MarkLogic Connector for Hadoop API includes several `InputFormat` subclasses for MarkLogic Server data types, such as `(document URI, node)` key-value pairs. For details, see "InputFormat Subclasses" on page 68.

You can also use Hadoop MapReduce key-value types through the `KeyValueInputFormat` and `ValueInputFormat` subclasses. These classes define type conversions between MarkLogic Server types and standard Hadoop MapReduce types; see "Using KeyValueInputFormat and ValueInputFormat" on page 56.

4.1.4 Defining the Map Function

A MapReduce application must include a subclass of `org.apache.hadoop.mapreduce.Mapper` and implement a `Mapper.map()` method. The `map` method transforms the map input key-value pairs into output key-value pairs that can be used as input for the reduce step.

The application-specific `Mapper` subclass and the signature of the `Mapper.map` method must match the configured map phase input and output key-value pair types. For example, if the map phase uses `NodeInputFormat` for input and produces `(Text, IntWritable)` output key-value pairs, then the `Mapper` subclass should be similar to the following because `NodeInputFormat` creates (`NodePath, MarkLogicNode)` input key-value pairs:

```
import org.apache.hadoop.mapreduce.Mapper;
import org.apache.hadoop.io.Text;
import org.apache.hadoop.io.IntWritable;
import com.marklogic.mapreduce.MarkLogicNode;
import com.marklogic.mapreduce.NodePath;


public class LinkCountInDoc {
  ...
  public static class RefMapper
    extends Mapper<NodePath, MarkLogicNode, Text, IntWritable> {
    public void map(NodePath key, MarkLogicNode value, Context context)
    {
      ...derive output key(s) and value(s)...
      context.write(output_key, output_value)
    }
  }
```

The `Mapper.map()` method constructs result key-value pairs corresponding to the expected output type, and then writes pairs to the `org.apache.hadoop.mapreduce.Context` parameter for subsequent handling by the MapReduce framework. In the example above, the map output key-value pairs must be `(Text, IntWritable)` pairs.

Configure the Mapper into the job using the `org.apache.hadoop.mapreduce.Job` API. For example:

```
public static void main(String[] args) throws Exception {
    Configuration conf = new Configuration();
    ...
    Job job = new Job(conf);
    job.setMapperClass(RefMapper.class);
    ...
}
```

For a list of `InputFormat` subclasses provided by the MarkLogic Connector for Hadoop API and the associated key and value types, see “InputFormat Subclasses” on page 68.

For more details, see “Example: Counting Href Links” on page 48 and the sample code provided in the connector package.

4.2 Basic Input Mode

The MarkLogic Connector for Hadoop supports basic and advanced input modes through the `mapreduce.marklogic.input.mode` configuration property. The default mode, basic, offers the best performance. In basic input mode, the connector handles all aspects of split creation. The job configuration properties control which fragments in a split to transform into input key-value pairs.

This section covers the following topics:

- Creating Input Splits
- Using a Lexicon to Generate Key-Value Pairs
- Using XPath to Generate Key-Value Pairs
- Example: Counting Href Links

For details on advanced input mode, see “Advanced Input Mode” on page 50.


4.2.1 Creating Input Splits

Basic mode does not give you control over split creation, other than setting the maximum split size using the `mapreduce.marklogic.input.maxsplitsize` property. Basic mode does give the job control over the content passed to the map function, as described in “Specifying the Input Mode” on page 37.

When using document fragments for input data, the connector divides the fragments in the database into input splits by forest, such that each split contains at most the number of fragments specified by `mapreduce.marklogic.input.maxsplitsize`.

Multiple splits might be required to cover a single forest. A split never spans more than one forest. When the maxium split size is smaller than the total number of fragments in the forest, the MarkLogic Connector for Hadoop can adjust the split size downwards so that the size is balanced across a given forest.

For example, consider a database containing 2 forests, forest1 and forest2. Forest1 contains 15 documents. Forest2 contains 18 documents. If `input.maxsplitsize` is 10, then the connector creates 2 splits from each forest, with each split covering roughly half the documents in each forest:

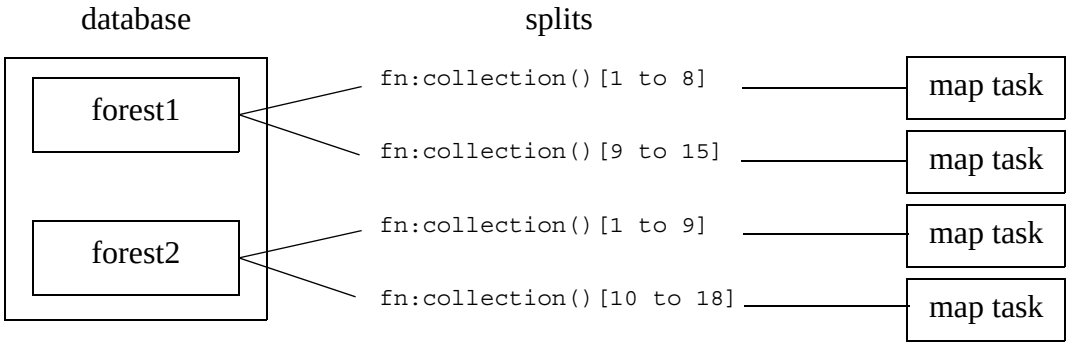

A similar distribution of data occurs when using a lexicon for input. Splits are constructed by querying the lexicon in each forest and assigning at most `input.maxsplitsize` entries to each split.

Use advanced mode if you require control over split creation. See "Advanced Input Mode" on page 50.

4.2.2 Using a Lexicon to Generate Key-Value Pairs

This section describes how to use a MarkLogic Server lexicon to create map input key-value pairs. Using a lexicon precludes using an XPath document selector for input. For general information about lexicons, see Browsing With Lexicons in the *Search Developer's Guide*.

To use a lexicon function:

1. Implement a Lexicon Function Wrapper Subclass corresponding to the XQuery lexicon function you wish to use.

2. Override Lexicon Function Parameter Wrapper Methods to specify the parameter values for the lexicon function call.

3. Choose an InputFormat subclass.

4. Configure the Job to use the lexicon by setting the configuration property `mapreduce.marklogic.input.lexiconfunctionclass`.

5. Additional De-duplication of Results Might Be Required if your application requires uniqueness in the map output values.

4.2.2.1 Implement a Lexicon Function Wrapper Subclass

The MarkLogic Connector for Hadoop API package `com.marklogic.mapreduce.functions` includes a lexicon function abstract class corresponding to each supported XQuery API lexicon function. Range and geospatial lexicons are not supported at this time. For a mapping between lexicon wrapper classes and the XQuery lexicon functions, see "Lexicon Function Subclasses" on page 70.

The subclass you create encapsulates a call to an XQuery lexicon function. The lexicon function is implicit in the parent class, and the function call parameters are implemented by the methods. For example, to use `cts:element-attribute-value-co-occurrences`, implement a subclass of `com.marklogic.mapreduce.functions.ElemAttrValueCooccurrences`:

```
import com.marklogic.mapreduce.functions.ElemAttrValueCooccurrences;

public class LinkCountCooccurrences {
    static class HrefTitleMap extends ElemAttrValueCooccurrences {...}
}
```

In your subclass, override the inherited methods for the required parameters and for the optional parameters to be included in the call, as described in "Override Lexicon Function Parameter Wrapper Methods" on page 42.

4.2.2.2 Override Lexicon Function Parameter Wrapper Methods

Each lexicon function wrapper class includes methods for defining the supported function parameter values, as strings. The connector uses this information to construct a call to the wrapped lexicon function in the input query.

The parameter related methods vary by the function interface. For details on a particular wrapper class, see the MarkLogic Connector for Hadoop javadoc.

You may not specify values corresponding to the `$quality-weight` or `$forest-ids` parameters of any lexicon function. Quality weight is not used in a MapReduce context, and the connector manages forest constraints for you in basic mode.

Note: If you include options settings in the lexicon call, do not set the `skip` or `truncate` options. The MarkLogic Connector for Hadoop reserves the `skip` and `truncate` lexicon function options for internal use.

Note: The `frequency-order` option supported by some lexicon calls is not honored in MapReduce results.

For example, the XQuery lexicon function `cts:element-values` is exposed through the `com.marklogic.mapreduce.function.ElementValues` class. The prototype for `cts:element-values` is:

```
cts:element-values(
  $element-names as xs:QName*,
  [$start as xs:anyAtomicType?],
  [$options as xs:string*],
  [$query as cts:query?],
  [$quality-weight as xs:double?],
  [$forest-ids as xs:unsignedLong*]
)
```

The `com.marklogic.mapreduce.function.ElementValues` wrapper class includes abstract methods corresponding to the `$element-names`, `$start`, `$options`, and `$query` parameters:

```
package com.marklogic.mapreduce.functions;

public abstract class LexiconFunction {

    public String getLexiconQuery() {...}
    public String[] getUserDefinedOptions() {...}
}

public abstract class ValuesOrWordsFunction extends LexiconFunction {
    public String getStart() {...}
}

public abstract class ElementValues extends ValuesOrWordsFunction {
    public abstract String[] getElementNames();
}
```

The parameter method overrides must return the string representation of an XQuery expression that evaluates to the expected parameter type. For example, if your job needs to make a lexicon function call equivalent to the following, then it must override the methods related to the `$element-names` and `$options` parameters to `cts:element-values`:

```
cts:element-values(xs:QName("wp:a"), (), "ascending")
```

The default start value from the inherited `ValuesOrWordsFunction.getStart` method already matches the desired parameter value. Override `ElementValue.getElementNames` and `LeixconFunction.getUserDefinedOptions` to specify the other parameter values. The resulting subclass is:

```
import com.marklogic.mapreduce.functions.ElementValues;
...
public class myLexiconFunction extends ElementValues {
    public String[] getElementNames() {
        String[] elementNames = {"xs:QName(\"wp:a\")"};
        return elementNames;
    }

    public String[] getUserDefinedOptions() {
        String[] options = {"ascending"};
        return options;
```

```
        }
    }
```

Note: If you override `ValuesOrWordsFunction.getStart` to specify a start value of type `xs:string`, you must include escaped double-quotes in the returned string. For example, to specify a start value of "aardvark", the `getStart` override must return "\"aardvark\"".

For a complete example, see `com.marklogic.mapreduce.examples.LinkCountCooccurrences`, included with the MarkLogic Connector for Hadoop.

4.2.2.3 Choose an InputFormat

Lexicon functions return data from a lexicon, rather than document content, so the document oriented InputFormat classes such as `DocumentInputFormat` and `NodeInputFormat` are not applicable with lexicon input. Instead, use `com.marklogic.mapreduce.ValueInputFormat` or `com.marklogic.mapreduce.KeyValueInputFormat`.

Note: `KeyValueInputFormat` is only usable with co-occurrences lexicon functions. `ValueInputFormat` may be used with any lexicon function.

When using `ValueInputFormat` with a lexicon function, choose an input value type that either matches the type returned by the lexicon function or can be converted from the lexicon return type to the input value type. For details on `KeyValueFormat` and `ValueInputFormat` and the supported type conversions, see “Using KeyValueInputFormat and ValueInputFormat” on page 56.

For example, `cts:element-values` returns `xs:anyAtomicType*`. If the element range index queried by your `ElementValues` subclass is an index with scalar type int, then you might configure the job to use `IntWritable` as the map input value type.

The co-occurrences lexicon function classes generate key-value pairs corresponding to the `cts:value` elements in each `cts:co-occurrence` returned by the underlying lexicon function. The key is the first `cts:value` in each cts:co-occurrence, and the value is the second. For example, if `cts:element-values` returns the following XML:

```
<cts:co-occurrence xmlns:cts="http://marklogic.com/cts"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
      xmlns:xs="http://www.w3.org/2001/XMLSchema">
    <cts:value xsi:type="xs:string">MARCELLUS</cts:value>
    <cts:value xsi:type="xs:string">BERNARDO</cts:value>
  </cts:co-occurrence>
  <cts:co-occurrence xmlns:cts="http://marklogic.com/cts"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
      xmlns:xs="http://www.w3.org/2001/XMLSchema">
    <cts:value xsi:type="xs:string">ROSENCRANTZ</cts:value>
    <cts:value xsi:type="xs:string">GUILDENSTERN</cts:value>
  </cts:co-occurrence>
  <cts:co-occurrence xmlns:cts="http://marklogic.com/cts"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
```

```
      xmlns:xs="http://www.w3.org/2001/XMLSchema">
    <cts:value xsi:type="xs:string">HORATIO</cts:value>
    <cts:value xsi:type="xs:string">MARCELLUS</cts:value>
  </cts:co-occurrence>
```

Then the generated map input key-value pairs are:

```
("MARCELLUS", "BERNARDO")
("ROSENCRANTZ", "GUILDENSTERN")
("HORATIO", "MARCELLUS")
```

As with `ValueInputFormat`, choose key and value types corresponding to the lexicon type or convertible from the lexicon type. For a complete example, see `com.marklogic.mapreduce.examples.LinkCountCooccurrences`.

4.2.2.4 Configure the Job

Set the `mapreduce.marklogic.input.lexiconfunctionclass` job configuration property to specify which lexicon call to use. This property setting takes precedence over `mapreduce.marklogic.input.documentselector` and `mapreduce.marklogic.input.subdocumentexpr`.

You can set `mapreduce.marklogic.input.lexiconfunctionclass` either in a configuration file or programmatically. To set the property in a configuration file, set the value to your lexicon subclass name with ".class" appended to it. For example:

```
<property>
  <name>mapreduce.marklogic.input.lexiconfunctionclass</name>
  <value>my.package.LexiconFunction.class</value>
</property>
```

To set the property programatically, use the `org.apache.hadoop.conf.Configuration` API. For example:

```
import org.apache.hadoop.conf.Configuration;
import com.marklogic.mapreduce.functions.ElemAttrValueCooccurrences;

public class LinkCountCooccurrences {
    static class HrefTitleMap extends ElemAttrValueCooccurrences {...}

    public static void main(String[] args) throws Exception {
        Configuration conf = new Configuration();
        ...

        conf.setClass(MarkLogicConstants.INPUT_LEXICON_FUNCTION_CLASS,
            HrefTitleMap.class, ElemAttrValueCooccurrences.class);
        ...
    }
}
```

4.2.2.5 De-duplication of Results Might Be Required

Your job might need to de-duplicate map results if the analysis performed by your job depends upon unique values in the map output key-value pairs. Only a URI lexicon is guaranteed to have unique values across all forests.

MarkLogic Server maintains lexicon data per forest. Each forest includes a lexicon for the fragments in that forest. Normally, when you directly call an XQuery lexicon function, MarkLogic Server gathers results from each forest level lexicon and de-duplicates them. As discussed in "Creating Input Splits" on page 40, the MarkLogic Connector for Hadoop runs input queries directly against each forest. The in-forest evaluation circumvents the de-duplication of results from lexicon functions.

For example, consider a database with 2 forests, each containing one document. If the database is configured with an element word lexicon for the `<data>` element, then the table below reflects the contents of the word lexicon in each forest:

forest	document content	words in per-forest lexicon
sample-1	<data> hello world </data>	hello world
sample-2	<data> goodbye world </data>	goodbye world

Calling `cts:words` (the lexicon function underlying `com.marklogic.mapreduce.functions.Words`) against the database returns `("goodbye", "hello", "world")`. Therefore, if you use the corresponding lexicon function class in a MapReduce job, you might expect 3 map output key-value pairs from this input data.

However, the in-forest evaluation of `cts:words` used by the MarkLogic Connector for Hadoop results in the two word lists `("hello", "world")` and `("goodbye", "world)`, generating 4 map output key-value pairs.If the purpose of the job is to count the number of unique words in the content, simply counting the number of reduce input key-value pairs results in an incorrect answer of 4.

If you require this kind of uniqueness, you must de-duplicate the results in your application. For example, your Reducer might use a hash map to detect and discard duplicate values.

4.2.3 Using XPath to Generate Key-Value Pairs

This section describes how to use XPath components to generate map input key-value pairs from document fragments. Using an XPath document selector precludes using a lexicon for input.

Use the following configuration properties to select the input fragments in a split based on an XPath expression:

- `mapreduce.marklogic.input.documentselector`
- `mapreduce.marklogic.input.subdocumentexpr`

The MarkLogic Connector for Hadoop constructs an input query that includes a path expression equivalent to concatenating the document selector and sub-document expression. For example, if the document selector is `fn:collection()` and the sub-document expression is `/*:data`, then the constructed input query uses an input XPath expression equivalent to `fn:collection/*:data`.

The document selectory determines which documents within a forest are included in each split. The sub-document expression determines which fragments of the selected documents contribute input key-value pairs. The MarkLogic Connector for Hadoop API uses separate document selector and sub-document expression components to maximize internal input query optimization.

> **Note:** The document selector must be a partially searchable XPath expression. For details, see Fully Searchable Paths and cts:search Operations in the *Query Performance and Tuning Guide*.

The default document selector is `fn:collection()`, which selects all documents in the split. The default sub-document expression returns all nodes selected by the document selector. If you do not specify either property, all documents nodes in the split are used.

The table below shows the results from several example document selector and subdocument expression combinations.

document selector	subdocument expression	result
none	none	All document nodes in the split.
`fn:collection("wikipedia")`	none	All document nodes in the split that are in the “wikipedia” colleciton.
`fn:collection("wikipedia")`	`//wp:nominee`	All `wp:nominee` elements in documents in the split that are in the “wikipedia” collection.

If your document selector or subdocument expression uses namespace qualifiers, define the namespaces using the `mapreduce.marklogic.input.namespaces` configuration property. The property value is a comma-separated list of alias-URI pairs. The following example defines a “wp” namespace and then uses it in the subdocument expression:

```
<property>
  <name>mapreduce.marklogic.input.namespace</name>
  <value>wp, http://www.marklogic.com/wikipedia</value>
</property>
<property>
  <name>mapreduce.marklogic.input.subdocumentexpr</name>
  <value>wp:nominee</value>
</property>
```

For details, see “Example: Counting Href Links” on page 48 and the sample code included in the connector package.

4.2.4 Example: Counting Href Links

Consider the `LinkCountInDoc` example, described in “LinkCountInDoc” on page 107. This example counts hyperlinks within the input collection. The map function for this sample expects `(node URI, node)` input pairs and produces `(href title, href count)` output pairs.

Suppose the database contains an input document in the “wikipedia” collection, with the URI `/oscars/drama.xml` and the following content (ellided for brevity):

```
<wp:nominee>...
  <wp:film>...
    <wp:p>...
      <wp:a href="http://en.wikipedia.org/wiki/Drama_film"
            title="Drama film">
        This is a dramatic film
      </wp:a>
    </wp:p>
  </wp:film>
</wp:nominee>
```

Notice the content includes embedded hrefs with titles. The following job configuration property settings extract hrefs with titles that reference other Wikipedia articles:

```
<property>
  <name>mapreduce.marklogic.input.namespace</name>
  <value>wp, http://www.marklogic.com/wikipedia</value>
</property>
<property>
  <name>mapreduce.marklogic.input.documentselector</name>
  <value>fn:collection("wikipedia")</value>
</property>
<property>
  <name>mapreduce.marklogic.input.subdocumentexpr</name>
  <value>//wp:a[@href and @title and fn:starts-with(@href,
"http://en.wikipedia.org")]/@title</value>
</property>
```

Using the above document selector and subdocument expression, the connector constructs an input query that first selects documents in the split that are in the "wikipedia" collection. Then, from those documents, all title attribute nodes in wp:a elements that contain hrefs to Wikipedia articles. Here is a breakdown of the path expression properties that drive the input query;

```
documentselector: fn:collection("wikipedia")
subdocumentexpr:
  //wp:a[                    (: all anchors :)
  @href and                  (: with href attributes :)
  @title and                 (: and title attributes :)
  fn:starts-with(@href, "http://en.wikipedia.org")]
                             (: referring to Wikipedia articles :)
  /@title                    (: return the title attribute node :)
```

The configured `InputFormat` subclass controls transformation of the fragments selected by the input query into input key-value pairs. For example, the input query for the sample document shown above finds a matching node with these characteristics:

```
document URI: /oscars/drama.xml

node path: /wp:nominee/wp:film/wp:abstract/html:p[1]/html:a[1]/@title

node: attribute node for title="Drama film" from this anchor element:
  <wp:a href="http://en.wikipedia.org/wiki/Drama_film"
          title="Drama film">
    drama film
  </wp:a>
```

If you configure the job to use `NodeInputFormat`, the input key-value pairs are `(NodePath, MarkLogicNode)` pairs. That is, the key is the node URI and the value is the node. The sample data shown above results in this input pair:

```
key: /wp:nominee/wp:film/wp:p[1]/wp:a[1]/@title
value: attribute node for title="Drama film"
```

If you configure the job to use `DocumentInputFormat` instead, the input key-value pairs have type `(DocumentURI, DatabaseDocument)`. The sample data results in the following input pair, differing from the previous case only in the key:

```
key: /oscars/drama.xml
value: attribute node for title="Drama film"
```

For a list of `InputFormat` subclasses provided by the connector, include the types of keys and values generated by each, see "InputFormat Subclasses" on page 68.

4.3 Advanced Input Mode

The connector supports basic and advanced input modes through the `mapreduce.marklogic.input.mode` configuration property. Advanced mode gives your application complete control over input split creation and fragment selection, at the cost of added complexity. In advanced mode, you must supply an input split query and an input query which the connector uses to map phase input.

This section covers the following topics:

- Creating Input Splits
- Creating Input Key-Value Pairs
- Optimizing Your Input Query
- Example: Counting Hrefs Using Advanced Mode

For details on basic mode, see “Basic Input Mode” on page 40. For a general discussion of input splits and key-value pair creation, see “How Hadoop Partitions Map Input Data” on page 31.

4.3.1 Creating Input Splits

This section covers the following topics:

- Overview
- Creating a Split Query with hadoop:get-splits

4.3.1.1 Overview

In advanced mode, your application controls input split creation by supplying an input split query in the `mapreduce.marklogic.input.splitquery` configuration property. Your input split query must generate `(forest-id, record-count, host-name)` tuples. Build a split query using the XQuery library function `hadoop:get-splits`, in combination with your own XPath and `cts:query`.

The split query returns a host name and forest id because the MarkLogic Connector for Hadoop interacts with MarkLogic Server at the forest level. When a split is assigned to a map task, the connector running in the task submits the input query directly against the forest identified in the split tuple. The `host-name` and `forest-id` in the split tuple identify the target forest.

The `record-count` in the split tuple only needs to be an rough estimate of the number of input key-value pairs in the split. The estimate need not be accurate. What constitutes a record is job-dependent. For example, a record can be a document fragment, a node, or a value from a lexicon.

For example, basic input mode uses a simple estimate of the total number of documents in each forest. When the input query runs against a split, it can generate more or fewer input key-value pairs than estimated. The more accurate the record count estimate is, the more accurately Hadoop balances workload across tasks.

An input split never spans multiple forests, but the content in a single forest may span multiple splits. The maximum number of records in a split is determined by the `com.marklogic.mapreduce.maxsplitsize` configuration property. The connector, rather than your split query, handles bounding splits by this maximum.

For example, if the split query returns a count of 1000 fragments for a forest and the max split size is 600, the connector generates two splits for that forest, one for the first 500 fragments and the other for the next 500 fragments. The connector adjusts the actual split size downward as needed to generate splits of similar size, so you do not get one split of 600 fragments and another of 400 fragments. This rebalancing keeps the workload even across tasks.

4.3.1.2 Creating a Split Query with hadoop:get-splits

Use the XQuery library function `hadoop:get-splits` to create split tuples using a searchable expression and `cts:query`. The parameters to `hadoop:get-splits` determine the documents under consideration in each forest, equivalent to the `$expression` and `$query` parameters of `cts:search`. The function returns an estimate rather than a true count to improve performance.

The following split query example returns one tuple per forest, where the count is an estimate of the total number of documents in the forest.

```
<property>
  <name>mapreduce.marklogic.input.splitquery</name>
  <value><![CDATA[
    declare namespace wp="http://www.mediawiki.org/xml/export-0.4/";
    import module namespace hadoop =
        "http://marklogic.com/xdmp/hadoop" at "/MarkLogic/hadoop.xqy";
    hadoop:get-splits('', 'fn:doc()', 'cts:and-query(())')
  ]]></value>
</property>
```

You may write an input split query without `hadoop:get-splits`, but your job may require additional privileges if you do so. The example below is equivalent to the previous hadoop:get-splits example. Unlike the previous example, however, admin privileges are required to execute this sample query.

```
<property>
  <name>mapreduce.marklogic.input.splitquery</name>
  <value><![CDATA[
    declare namespace wp="http://marklogic.com/wikipedia";
    import module namespace admin = "http://marklogic.com/xdmp/admin"
      at "/MarkLogic/admin.xqy";
    let $conf := admin:get-configuration()
    for $forest in xdmp:database-forests(xdmp:database())
      let $host_id := admin:forest-get-host($conf, $forest)
      let $host_name := admin:host-get-name($conf, $host_id)
      let $cnt :=
        xdmp:estimate(
          cts:search(fn:doc(), cts:and-query(()), (), 0.0, $forest))
      return ($forest, $cnt, $host_name)
```

```
    ]]></value>
  </property>
```

4.3.2 Creating Input Key-Value Pairs

As described in "Understanding the MapReduce Job Life Cycle" on page 28, map input key-value pairs are generated by each map task from the input split assigned to the task. In most cases, the MarkLogic Server content in the split is selected by the input query in the `mapreduce.marklogic.input.query` configuration property. `ForestInputFormat` selects documents differently; for details, see "Direct Access Using ForestInputFormat" on page 60.

The input query must return a sequence, but the nature of the items in the sequence is dependent on the configured `InputFormat` subclass. For example, if the job uses `NodeInputFormat`, the input key-value pairs are `(NodePath, MarkLogicNode)` pairs. Therefore, an input query for `NodeInputFormat` must return a sequence of nodes. The MarkLogic Connector for Hadoop then converts each node into a `(NodePath, MarkLogicNode)` pair for passage to the map function.

The table below summarizes the input query results expected by each `InputFormat` subclass provided by the MarkLogic Connector for Hadoop. For more information about the classes, see "InputFormat Subclasses" on page 68.

`InputFormat` subclass	Input query result
`DocumentInputFormat`	`document-node()*`
`NodeInputFormat`	`node()*`
`KeyValueInputFormat`	A sequence of alternating keys and values, `(key1, value1, ..., keyN, valueN)`. The key and value types depend on the job configuration. See "Using KeyValueInputFormat and ValueInputFormat" on page 56.
`ValueInputFormat`	A sequence of values, `(value1,...,valueN)`. The value type depends on the job configuration. See "Using KeyValueInputFormat and ValueInputFormat" on page 56.
`ForestInputFormat`	Not applicable. For details, see "Direct Access Using ForestInputFormat" on page 60.

`KeyValueInputFormat` and `ValueInputFormat` enable you to configure arbitrary key and/or value types, within certain constraints. For details, see "Using KeyValueInputFormat and ValueInputFormat" on page 56. When using these types, your input query must return keys and/or values compatible with the type conversions defined in "Supported Type Transformations" on page 58.

The following example uses `ValueInputFormat` with `org.apache.hadoop.mapreduce.Text` as the value type. (The key type with `ValueInputFormat` is always `org.apache.hadoop.mapreduce.LongWritable`. and is supplied automatically by the MarkLogic Connector for Hadoop.) The input query returns an attribute node, and the implicit type conversion built into `ValueInputFormat` converts the result into the attribute text for passage to the map function.

```
<property>
  <name>mapreduce.marklogic.input.query</name>
  <value><![CDATA[
    declare namespace wp="http://marklogic.com/wikipedia";
    for $t in fn:collection()/wp:nominee//wp:a[@title and @href]/@title
      return $t
  ]]></value>
</property>
```

4.3.3 Optimizing Your Input Query

In basic mode, the MarkLogic Connector for Hadoop optimizes the input query built from the configuration properties. In advanced input mode, you must optimize the input query yourself. Use the configuration property `mapreduce.marklogic.input.bindsplitrange` to optimize your input query by limiting the work your query does per split.

Usually, each input split covers a set of records (or fragments) in a specific forest; see the illustration in “Creating Input Splits” on page 40. The input split might cover only a subset of the content in a forest, but the input query runs against the entire forest. Constraining the content manipulated by the input query to just those under consideration for the split can significantly improve job performance.

For example, imagine an input query built around the following XPath expression:

```
fn:collection()//wp:a[@title]
```

In the worst case, evaluating the above expression examines every document in the forest for each split. If the forest contains 100 documents, covered by 4 splits of 25 fragments each, then the job might examine 4 * 100 documents to cover the content in the forest, and then discard all but 25 of the results in each split:

```
fn:collection()//wp:a[@title][1 to 25]
fn:collection()//wp:a[@title][26 to 50]
fn:collection()//wp:a[@title][51 to 75]
fn:collection()//wp:a[@title][76 to 100]
```

The range on each expression above, such as `[1 to 25],` is the split range. Constraining the set of documents by the split range earlier can be more efficient:

```
fn:collection()[1 to 25]//wp:a[@title]
...
```

In practice MarkLogic Server might internally optimize such a simple XPath expression, but a more complex FLOWR expression can require hand tuning.

The exact optimization is query dependent, but the split start and end values are made available to your input query through external variables if you set the configuration property `mapreduce.marklogic.input.bindsplitrange` to true.

To use this feature, set the property to true and do the following in your input query:

1. Declare the pre-defined namespace `http://marklogic.com/hadoop`. The split start and end variables are in this namespace. For example:

```
declare namespace mlmr="http://marklogic.com/hadoop";
```

2. Declare `splitstart` and `splitend` as external variables in the namespace declared in Step 1. You must use only these names. For example:

```
declare variable $mlmr:splitstart as xs:integer external;
declare variable $mlmr:splitend as xs:integer external;
```

3. Use the variables to constrain your query.

For example, the following input query returns the first 1K bytes of each document in a collection of binary documents. Notice the query uses `splitstart` and `splitend` to construct a sub-binary node for just the documents relevant to each split:

```
xquery version "1.0-ml";
declare namespace mlmr="http://marklogic.com/hadoop";        (: 1 :)

declare variable $mlmr:splitstart as xs:integer external;    (: 2 :)
declare variable $mlmr:splitend as xs:integer external;

for $doc in fn:doc()[$mlmr:splitstart to $mlmr:splitend]     (: 3 :)
return xdmp:subbinary($doc/binary(), 0, 1000)
```

For a complete example, see “BinaryReader” on page 111.

4.3.4 Example: Counting Hrefs Using Advanced Mode

This example counts hyperlinks with titles using advanced input mode. The full code is available in the `LinkCount` example included in the MarkLogic Connector for Hadoop package. See “LinkCount” on page 109.

Suppose the input data has the following structure:

```
<wp:page>
  <title>The Topic</title>
  ...
  <text>
```

```
      <p>...
        <a href="Drama film" title="Drama film">
          Drama film
        </a>
      </p>
    </text>
  </wp:page>
```

Notice the content includes embedded hrefs with titles. The input split query shown below estimates the number of documents in each forest by calling `xdmp:estimate` and returns `(forest-id, count, host-name)` tuples. The query is wrapped in a `CDATA` section so the contents are not interpreted by the Hadoop MapReduce configuration parser.

```
<property>
  <name>mapreduce.marklogic.input.splitquery</name>
  <value><![CDATA[
    declare namespace wp="http://www.mediawiki.org/xml/export-0.4/";
    import module namespace admin =
      "http://marklogic.com/xdmp/admin" at "/MarkLogic/admin.xqy";
    let $conf := admin:get-configuration()
    for $forest in xdmp:database-forests(xdmp:database())
      let $host_id := admin:forest-get-host($conf, $forest)
      let $host_name := admin:host-get-name($conf, $host_id)
      let $cnt :=
        xdmp:estimate(
          cts:search(fn:doc(), cts:and-query(()), (), 0.0, $forest))
      return ($forest, $cnt, $host_name)
  ]]></value>
</property>
```

The split query generates at least one split per forest. More than one split can be generated per forest, depending on the number of documents in the forest and the value of the configuration property `mapreduce.marklogic.input.maxsplitsize`. For details, see “Creating Input Splits” on page 50.

The example input query selects qualifying hrefs from each document in the split. A qualifying href in this example is one that has a title and refers to another Wikipedia topic, rather than to an image or an external file. The input query below uses an XPath expression to find qualifying hrefs and extract the text from the title attribute:

```
<property>
  <name>mapreduce.marklogic.input.query</name>
  <value><![CDATA[
    xquery version "1.0-ml";
    declare namespace wp="http://www.mediawiki.org/xml/export-0.4/";
    //wp:a[@title and @href and not
       (fn:starts-with(@href, "#")
        or fn:starts-with(@href, "http://")
        or fn:starts-with(@href, "File:")
        or fn:starts-with(@href, "Image:"))]/@title
```

```
  ]]></value>
</property>
```

The `LinkCount` sample uses the above split query and input query with `ValueInputFormat` configured to generate `(LongWritable, Text)` map input pairs, where the key is a unique (but uninteresting) number and the value is the text from the title attribute of qualifying hrefs. For example one input to the map function might be:

```
(42, "Drama film")
```

For more information about `ValueInputFormat`, see "Using KeyValueInputFormat and ValueInputFormat" on page 56.

The map function of `LinkCount` discards the input key and generates a `(Text, IntWritable)` key-value pair where the key is the text from the title attribute (the value on the input pair), and the value is always one, to indicate a single reference to the topic:

```
public static class RefMapper
extends Mapper<LongWritable, Text, Text, IntWritable> {
    private final static IntWritable one = new IntWritable(1);
    private Text refURI = new Text();


    public void map(LongWritable key, Text value, Context context)
      throws IOException, InterruptedException
    {
        refURI.set(value);
        context.write(refURI, one);
    }
    ...
```

For example, if `RefMapper.map` receives `(42, "Drama film")` as input, then it produces the output pair `("Drama film", 1)`.

4.4 Using KeyValueInputFormat and ValueInputFormat

The `KeyValueInputFormat` and `ValueInputFormat` classes enable you to create input key-value pairs with types other than the connector specific types `MarkLogicNode`, `NodePath`, and `DocumentURI`.

This section covers the following topics about using `KeyValueInputFormat` and `ValueInputFormat`.

- Overview
- Job Configuration
- Supported Type Transformations
- Example: Using KeyValueInputFormat

4.4.1 Overview

Use `KeyValueInputFormat` or `ValueInputFormat` to specify your own key-value type combinations, or when extracting input data from a MarkLogic Server lexicon. The connector performs a "best-effort" type conversioin between the key and/or value types from the input query or lexicon function and the target type. For details, see "Supported Type Transformations" on page 58.

Use `KeyValueInputFormat` type when your application depends upon both the key and value type. Use `ValueInputFormat` when only the value is interesting. In `ValueInputFormat` the key is simply a unique number with no significance.

Most lexicon functions require use of `ValueInputFormat`. You may use `KeyValueInputFormat` only with lexicon co-occurence functions. For details, see "Using a Lexicon to Generate Key-Value Pairs" on page 41.

For an example, see "Example: Using KeyValueInputFormat" on page 58.

4.4.2 Job Configuration

When using `KeyValueInputFormat`, specify the map phase input key and value type by setting the configuration properties `mapreduce.marklogic.input.keyclass` and `mapreduce.marklogic.input.valueclass`. For example, to set the properties in the configuration file:

```
<property>
  <name>mapreduce.marklogic.input.keyclass</name>
  <value>org.apache.hadoop.io.Text.class</value>
</property>
<property>
  <name>mapreduce.marklogic.input.valueclass</name>
  <value>com.marklogic.mapreduce.NodePath.class</value>
</property>
```

You can also use the `org.apache.hadoop.mapreduce.Job` API to set the property in code:

```
import org.apache.hadoop.io.Text;
import org.apache.hadoop.io.Writable;
...
public static void main(String[] args) throws Exception {
    Configuration conf = new Configuration();
    ...
    conf.setClass("mapreduce.marklogic.input.valueClass",
                  Text.class, Writable.class);
```

When using `ValueInputFormat`, specify the map phase value type by setting the configuration property `mapreduce.marklogic.input.valueclass`. The key type is built in and is always `org.apache.hadoop.io.LongWritable`.

4.4.3 Supported Type Transformations

The set of supported type transformations are listed in the table below. The list applies to both the key and value types when using `KeyValueInputFormat`, and to the value type when using `ValueInputFormat`.

If the target key type or value type is	Then the query result type must be
`org.apache.hadoop.io.Text`	Any XQuery type with a `String` representation. See `com.marklog.xcc.types.XdmValue.asString()`.

`org.apache.hadoop.io.IntWritable`
`org.apache.hadoop.io.VIntWritable`
`org.apache.hadoop.io.LongWritable`
`org.apache.hadoop.io.VLongWritable`
	`xs:integer`

`org.apache.hadoop.io.BooleanWritable`	`xs:boolean`
`org.apache.hadoop.io.FloatWritable`	`xs:float`
`org.apache.hadoop.io.DoubleWritable`	`xs:double`
`org.apache.hadoop.io.BytesWritable`	`xs:hexBinary` `xs:base64Binary`
`com.marklogic.mapreduce.MarkLogicNode`	`node()`

If the query result type and target type do not correspond to one of the supported conversions, or the target type is `Text` but the result type does not have a `String` representation, `java.lang.UnsupportedOperationException` is raised.

4.4.4 Example: Using KeyValueInputFormat

Consider a job which uses `KeyValueInputFormat` to count the number of occurences of each href in the input document set and saves the results to HDFS. This is similar to the `LinkCount` sample included with the connector; see `com.marklogic.mapreduce.examples.LinkCount.java` and the `conf/marklogic-advanced.xml` configuration file.

This example uses advanced input mode with an input query that generates `(xs:string, xs:integer)` pairs containing the href title and a count from `cts:frequency`. The input query is shown below:

```
declare namespace wp="http://www.mediawiki.org/xml/export-0.4/";
declare variable $M := cts:element-attribute-value-co-occurrences(
    xs:QName("wp:a"),
    xs:QName("href"),
    xs:QName("wp:a"),
    xs:QName("title"),
```

```
        ("proximity=0", "map",
         "collation=http://marklogic.com/collation/codepoint"),
        cts:directory-query("/space/wikipedia/enwiki/", "infinity")) ;
    for $k in map:keys($M)[
        not(starts-with(., "#") or starts-with(., "http://") or
            starts-with(., "File:") or starts-with(., "Image:")) ]
    let $v := map:get($M, $k)
    where $v != ""
    return
        for $each in $v
        return ($each, cts:frequency($each))
```

`KeyValueInputFormat` generates `(Text, IntWritable)` map phase input key-value pairs from the above query. The key is the title from the href anchor and the value is the count. The following input configuration properties define the key and value types for `KeyValueInputFormat`:

```
<property>
    <name>mapreduce.marklogic.input.keyclass</name>
    <value>org.apache.hadoop.io.Text</value>
</property>
<property>
    <name>mapreduce.marklogic.input.valueclass</name>
    <value>org.apache.hadoop.io.IntWritable</value>
</property>
```

The job programmatically sets the `InputFormat` class to `KeyValueFormat`, and the `Mapper.map` method expects the corresponding input types, as shown below. `KeyValueInputFormat` handles converting the input query results for each pair from `(xs:string, xs:integer)` into `(Text, IntWritable)`.

```
import org.apache.hadoop.mapreduce.Job;
import org.apache.hadoop.mapreduce.Mapper;
import com.marklogic.mapreduce.KeyValueInputFormat;

public class LinkCount {
    public static class RefMapper
    extends Mapper<Text, IntWritable, Text, IntWritable> {
        public void map(Text key, IntWritable value, Context context)
{...}
    ...

    public static void main(String[] args) throws Exception {
        Configuration conf = new Configuration();
        ...
        Job job = new Job(conf);
        job.setInputFormatClass(KeyValueInputFormat.class);
        ...
    }

}
```

The same type conversions apply when using `ValueInputFormat`, but you do not need to configure `mapreduce.marklogic.input.keyclass` because the key class is always `LongWritable`. The `LinkCount` sample code uses `ValueInputFormat` and relies on the default key and value types to achieve the same effect as shown above.

4.5 Configuring a Map-Only Job

Some jobs do not require a reduce step. For example, a job which ingests documents in HDFS into MarkLogic Server may complete the ingestion during the map step. For an example of a map-only job, see “ContentLoader” on page 113.

To stop a job after the map completes, set the number of reduce tasks to zero. You may set the number of reduce tasks in a configuration file or programmatically. For example, to set the number of reduce tasks to 0 in a configuration, include the following setting:

```
<property>
  <name>mapred.reduce.tasks</name>
  <value>0</value>
</property>
```

To set the number of reduce tasks to 0 programmatically, use the Hadoop API function `org.apache.hadoop.Configuration.setNumReduceTasks`.

If your map-only job uses MarkLogic Server for output, you must disable the Hadoop MapReduce speculative execution feature. For details, see “Disabling Speculative Execution” on page 75.

4.6 Direct Access Using ForestInputFormat

Direct Access enables you to bypass MarkLogic Server and extract documents from a database by reading them directly from the on-disk representation of a forest. Use `ForestInputFormat` for DirectAccess in a MapReduce job.

This advanced feature circumvents MarkLogic Server document management and is intended primarily for accessing offline and read-only forests as part of a tiered storage strategy. Most applications should use the other `MarkLogicInputFormat` implementations, such as `DocumentInputFormat` or `NodeInputFormat`.

This section covers the following Direct Access topics:

- When to Consider ForestInputFormat
- Limitations of Direct Access
- Controlling Input Document Selection
- Specifying the Input Forest Directories
- Determining Input Document Type in Your Code

- Where to Find More Information

4.6.1 When to Consider ForestInputFormat

A forest is the internal representation of a collection of documents in a MarkLogic database; for details, see Understanding Forests in the *Administrator's Guide*. A database can contain many forests, and forests can have various states, including detached and readonly.

Direct Access enables you to extract documents directly from a detached or read-only forest without going through MarkLogic Server. Direct Access and `ForestInputFormat` are primarily intended for accessing archived data that is part of a tiered storage deployment; for details, see Tiered Storage in the *Administrator's Guide*. You should only use Direct Access on a forest that is offline or read-only; for details, see "Limitations of Direct Access" on page 61.

For example, if you have data that ages out over time such that you need to retain it, but you do not need to have it available for real time queries through MarkLogic Server, you can archive the data by taking the containing forests offline. Such data is still accessible using Direct Access.

You can store archived forests on HDFS or another filesystem, and access the documents stored in them from your MapReduce job, even if you do not have an active MarkLogic instance available. For example, `ForestInputFormat` can be used to support large scale batch data analytics without requiring all the data to be active in MarkLogic Server.

Since Direct Access bypasses the active data management performed by MarkLogic Server, you should not use it on forests receiving document updates. For details, see "Limitations of Direct Access" on page 61.

4.6.2 Limitations of Direct Access

You should only use `ForestInputFormat` on forests that meet one of the following criteria:

- The forest is offline and not in an error state. A forest is offline if the availability is set to offline, or the forest or the database to which it is attached is disabled. For details, see Taking Forests and Partitions Online and Offline in the *Administrator's Guide*.
- The forest is online, but the `updates-allowed` state of the forest is `read-only`. For details, see Setting the Updates-allowed State on Partitions in the *Administrator's Guide*.

The following additional limitations apply to using Direct Access:

- Accessing documents with Direct Access bypasses security roles and privileges. The content is protected only by the filesystem permissions on the forest data.
- Direct Access cannot take advantage of indexing or caching when accessing documents. Every document in each participating forest is read, even when you use filtering criteria. Filtering can only be applied after reading a document off disk.
- Direct Access skips property fragments.

- Direct Access skips documents partitioned into multiple fragments. For details, see Fragments in the *Administrator's Guide*.

`ForestInputFormat` skips any forest (or a stand within a forest) that is receiving updates or is in an error state, as well as property fragments and fragmented documents. Processing continues even when some documents are skipped.

Your forest data must be reachable from the hosts in your Hadoop cluster. If your job accesses the contents of large or external binary documents retrieved with `ForestInputFormat`, then the large data directory and any external binary directories should also be reachable. Furthermore, these directories must be reachable along the same path as when the forest was online.

Your forest data must be reachable from the hosts in your Hadoop cluster. If your job accesses the contents of large or external binary documents retrieved with `ForestInputFormat`, the following additional reachability requirements apply:

- If your job accesses the contents of a large binary, the large data directory must be reachable using the same path as when the forest was online.
- If your job accesses the contents of an external binary, the directory containing the external content should be reachable using the same path that `xdmp:external-binary-path` returns when the containing forest is online.

If your job does not access the contents of any large or external binary documents, then the large data directory and/or external binary directory need not be reachable.

For example, consider a forest configured to use `hdfs://my/large/data` as a large data directory when it was live. If your map function is called with a `LargeBinaryDocument` from this forest, you can safely call `LargeBinaryDocument.getContentSize` even if the large data directory is not reachable. However, you can only successfully call `LargeBinaryDocument.getContentAsMarkLogicNode` if `hdfs://my/large/data` is reachable.

Similarly, consider a forest that contains an external binary document inserted into the database with `/my/external-images/huge.jpg` as the path to the external data. If your map function is called with a `LargeBinaryDocument` corresponding to this binary, you can safely call `LargeBinaryDocument.getPath` even if `/my/external-images` is not reachable. However, you can only successfully call `LargeBinaryDocument.getContentAsByteArray` if `/my/external-images/huge.jpg` is reachable.

To learn more about how MarkLogic Server stores content, see "Where to Find More Information" on page 65.

4.6.3 Controlling Input Document Selection

You cannot specify an input query or document selector with `ForestInputFormat`. Use the following configuration properties to filter the input documents instead.

Note: Even with filtering, all documents in the forest(s) are accessed because indexing does not apply. Filtering only limits which documents are passed to your map or reduce function.

Filter	Description
directory	Include only documents in specific database directories. To specify a directory filter, use the configuration property `mapreduce.marklogic.input.filter.directory`.
collection	Include only documents in specific collections. To specify a collection filter, use the configuration property `mapreduce.marklogic.input.filter.collection`.
document type	Include only documents of the specified types. You can select one or more of XML, TEXT, and BINARY. To specify a document type filter, use the configuration property `mapreduce.marklogic.input.filter.type`.

For more details, see "Input Configuration Properties" on page 66.

You can specify multiple directories, collections or document types by using a comma separated list of values. You can specify combinations of directory, collection, and document type filters. The following example configuration settings select XML and text documents in the database directory `/documents/` that are in either the `invoices` or `receipts` collections..

```
<property>
  <name>mapreduce.marklogic.input.filter.directory</name>
  <value>/documents/</value>
</property>
<property>
  <name>mapreduce.marklogic.input.filter.collection</name>
  <value>invoices,receipts</value>
</property>
<property>
  <name>mapreduce.marklogic.input.filter.type</name>
  <value>XML,TEXT</value>
</property>
```

4.6.4 Specifying the Input Forest Directories

When you use `ForestInputFormat`, your job configuration must include the filesystem or HDFS directories containing the input forest data. `ForestInputFormat` is a subclass of the Apache Hadoop `FileInputFormat` class, so you can configure the forest directories using `FileInputFormat.setInputPaths`.

For example, the following code assumes the forest input directories are passed in as a command line argument on the hadoop command line that executes the job:

```
public void main(final String[] args) throws Exception {
    ...
    Job job = new Job(super.getConf());
    job.setJarByClass(MapTreeReduceTree.class);

    // Map related configuration
    job.setInputFormatClass(ForestInputFormat.class);
    job.setMapperClass(MyMapper.class);
    job.setMapOutputKeyClass(DocumentURI.class);
    job.setMapOutputValueClass(DOMDocument.class);
    FileInputFormat.setInputPaths(job, new Path(args[0]));
    ...
}
```

The directory(s) passed to setInputPaths should be the directory that contains the entire forest. For example, the default location of a forest named `my-forest` on Linux is `/var/opt/MarkLogic/Forests/my-forest`, and that is the path you would pass to use my-forest as an input source for your job. Similarly, if you configure your data directory to be hdfs://MarkLogic, then the path to the forest might be `hdfs://MarkLogic/Forests/my-forest`.

4.6.5 Determining Input Document Type in Your Code

When you use `ForestInputFormat`, your map or reduce function receives (`DocumentURI`, `ForestDocument`) input key-value pairs. `ForestDocument` is an abstract class. The concrete document object type depends on the content type of the data in the document. Use `MarkLogicDocument.getContentType` to determine the appropriate concrete type.

The following table shows the correspondence between the `com.marklogic.mapreduce.ContentType` returned by `MarkLogicDocument.getContentType` and the concrete type of the document in a key-value pair. Binary documents are further specialized into `RegularBinaryDocument` and `LargBinaryDocument`; for details, see Working With Binary Documents in the *Application Developer's Guide*.

Content Type	`ForestDocument` Subclass
XML TEXT	com.marklogic.mapreduce.DOMDocument
BINARY	com.marklogic.mapreduce.BinaryDocument com.marklogic.mapreduce.RegularBinaryDocument com.marklogic.mapreduce.LargeBinaryDocument

`DOMDocument` is a read-only representation of a document as it is stored in the database. Accessors allow you to convert the content into other forms for further manipulation. For example, you can convert the contents to `String`, `MarkLogicNode`, or `org.w3c.dom.Document`. For details, see the JavaDoc for `com.marklogic.mapreduce.DOMDocument`.

The following example demonstrates coercing a `ForestDocument` into an appropriate concrete type based on the content type.

```
public static class MyMapper
extends Mapper<DocumentURI, ForestDocument, DocumentURI, DOMDocument> {
    public static final Log LOG = LogFactory.getLog(MyMapper.class);

    public void map(
        DocumentURI key, ForestDocument value, Context context)
    throws IOException, InterruptedException {
        if (value != null &&
            value.getContentType() != ContentType.BINARY) {
            DOMDocument domdoc = (DOMDocument)value;
            // work with the document...
        } else if (value != null) {
            if (value instanceof LargeBinaryDocument) {
                LargeBinaryDocument lbd = (LargeBinaryDocument)value;
                // work with the document...
            } else if (value instanceof RegularBinaryDocument) {
                RegularBinaryDocument rbd =
                    (RegularBinaryDocument)value;
                // work with the document...
            }
        }
    }
}
```

4.6.6 Where to Find More Information

Refer to the following topics to learn more about how MarkLogic Server stores and manages documents:

- Understanding Forests in the *Administrator's Guide*.
- Understanding and Controlling Database Merges in the *Administrator's Guide*.
- Tiered Storage in the *Administrator's Guide*.
- Disk Storage Considerations in the *Query Performance and Tuning Guide*.
- Getting Started with Distributed Deployments in the *Scalability, Availability, and Failover Guide*.

4.7 Input Configuration Properties

The table below summarizes connector configuration properties for using MarkLogic Server as an input source. Some properties may only be used with basic input mode and others may only be used with advanced input mode. For more information, see `com.marklogic.mapreduce.MarkLogicConstants` in the *MarkLogic Hadoop MapReduce Connector API*.

Property	Description
`mapreduce.marklogic.input.username`	Username privileged to read from the database attached to your XDBC App Server.
`mapreduce.marklogic.input.password`	Cleartext password for the `input.username` user.
`mapreduce.marklogic.input.host`	Hostname of the server hosting your input XDBC App Server.
`mapreduce.marklogic.input.port`	The port configured for your XDBC App Server on the input host.
`mapreduce.marklogic.input.usesll`	Whether or not to use an SSL connection to the server. Set to `true` or `false`.
`mapreduce.marklogic.input.ssloptionsclass`	The name of a class implementing SslConfigOptions, used to configure the SSL connection when `input.usessl` is true.
`mapreduce.marklogic.input.documentselector`	An XQuery path expression step specifying a sequence of document nodes to use for input. Basic mode only. Not usable with `ForestInputFormat`. Default: `fn:collection()`. See “Basic Input Mode” on page 40.
`mapreduce.marklogic.input.subdocumentexpr`	An XQuery path expression used with `input.documentselector` to select sub-document items to use in input key-value pairs. Basic mode only. Not usable with `ForestInputFormat`. See “Basic Input Mode” on page 40.

Property	Description
mapreduce.marklogic.input.namespace	A comma-separated list of namespace name-URI pairs to use when evaluating the path expression constructed from input.documentselector and input.subdocumentexpr. Basic mode only. See "Basic Input Mode" on page 40.
mapreduce.marklogic.input.lexiconfunc-tionclass	The class type of a lexicon function subclass. Use with KeyValueInputFormat and ValueIn-putFormat. Only usable in basic input mode. See "Using a Lexicon to Generate Key-Value Pairs" on page 41.
mapreduce.marklogic.input.splitquery	In advanced input mode, the query used to generate input splits. See "Creating Input Splits" on page 50.
mapreduce.marklogic.input.query	In advanced input mode, the query used to select input fragments from MarkLogic Server. See "Creating Input Key-Value Pairs" on page 52.
mapreduce.marklogic.input.bindsplitrange	Indicates whether or not your input query requires access to the external split range variables, splitstart and splitend. Only usable in advanced input mode. Default: false. See "Optimizing Your Input Query" on page 53.
mapreduce.marklogic.input.maxsplitsize	The maximum number of records (fragments) per input split. Default: 50,000.
mapreduce.marklogic.input.keyclass	The class type of the map phase input keys. Use with KeyValueInputFormat. See "Using KeyValueInputFormat and ValueInputFor-mat" on page 56.
mapreduce.marklogic.input.valueclass	The class type of the map phase input values. Use with KeyValueInputFormat and ValueIn-putFormat. See "Using KeyValueInputFormat and ValueInputFormat" on page 56.

Property	Description
mapreduce.marklogic.input.recordtofragmentratio	Defines the ratio of the number of retrieved input records to fragments. Used only for MapReduce's progress reporting. Default: 1.0.
mapreduce.marklogic.input.indented	Whether or not to indent (prettyprint) XML extracted from MarkLogic Server. Set to `true`, `false`, or `serverdefault`. Default: false.
mapreduce.marklogic.input.filter.collection	A comma-separated list of collection names, specifying which document collections to use for input with `ForestInputFormat`. Optional. Default: Do not filter input by collection.
mapreduce.marklogic.input.filter.directory	A comma-separated list of database directory paths. Only documents in these directories are included in the input document set with `ForestInputFormat`. Optional. Default: Do not filter input by database directory.
mapreduce.marklogic.input.filter.type	Filter input by content type when using `ForestInputFormat`. Allowed values: XML, TEXT, BINARY. You can specify more than one value. Optional. Default: Include all content types.

4.8 InputFormat Subclasses

The MarkLogic Connector for Hadoop API provides subclasses of `InputFormat` for defining your map phase input splits and key-value pairs when using MarkLogic Server as an input source. Specify the `InputFormat` subclass appropriate for your job using the `org.apache.hadoop.mapreduce.job.setInputFormatClass` function. For example:

```
import com.marklogic.mapreduce.NodeInputFormat;
import org.apache.hadoop.mapreduce.Job;
...
public class LinkCountInDoc {
    ...
    public static void main(String[] args) throws Exception {
        Job job = new Job(conf);
        job.setInputFormatClass(NodeInputFormat.class);
        ...
    }

}
```

The following table summarizes the `InputFormat` subclasses provided by the connector and the key and value types produced by each class. All classes referenced below are in the package `com.marklogic.mapreduce`. For more details, see the *MarkLogic Hadoop MapReduce Connector API*.

Class	Key Type	Value Type	Description
`MarkLogicInputFormat`	any	any	Abstract superclass for all connector specific `InputFormat` types. Generates input splits and key-value pairs from MarkLogic Server.
`DocumentInputFormat`	`DocumentURI`	`DatabaseDocument`	Generates key-value pairs using each node selected by the input query as a value and the URI of the document containing the node as a key.
`NodeInputFormat`	`NodePath`	`MarkLogicNode`	Generates key-value pairs using each node selected by the input query as a value and the node path of the node as a key.
`ForestInputFormat`	`DocumentURI`	`ForestDocument`	Generates key-value pairs using each document selected by the input filters as a value and the URI of the document as a key. For details, see “Direct Access Using ForestInputFormat” on page 60.

Class	Key Type	Value Type	Description
`KeyValueInputFormat`	any	any	Uses input from MarkLogic Server to generate input key-value pairs with user defined types. Use `mapreduce.marklogic.input.keyclass` and `mapreduce.marklogic.input.valueclass` to specify the key and value types. See "Using KeyValueInputFormat and ValueInputFormat" on page 56.
`ValueInputFormat`	`Int`	any	Generates input key-value pairs where only the value is of interest. The key is simply a count of the number of items seen when the pair is generated. Use `mapreduce.marklogic.input.valueclass` to specify the value type. See "Using KeyValueInputFormat and ValueInputFormat" on page 56.

4.9 Lexicon Function Subclasses

The following table shows the correspondence between MarkLogic Server lexicon built-in functions and MarkLogic Connector for Hadoop lexicon function wrapper classes. Locate the lexicon function you wish to use and include a subclass of the corresponding wrapper class in your job. For details, see "Using a Lexicon to Generate Key-Value Pairs" on page 41.

Lexicon Wrapper Superclass	XQuery Lexicon Function
`ElemAttrValueCooccurrences`	`cts:element-attribute-value-co-occurrences`
`ElemValueCooccurrences`	`cts:element-value-co-occurrences`
`FieldValueCooccurrences`	`cts:field-value-co-occurrences`
`ValueCooccurrences`	`cts:value-co-ocurrences`
`CollectionMatch`	`cts:collection-match`
`ElementAttributeValueMatch`	`cts:element-attribute-value-match`

Lexicon Wrapper Superclass	XQuery Lexicon Function
ElementAttributeWordMatch	cts:element-attribute-word-match
ElementValueMatch	cts:element-value-match
ElementWordMatch	cts:element-word-match
FieldValueMatch	cts:field-value-match
FieldWordMatch	cts:field-word-match
UriMatch	cts:uri-match
ValueMatch	cts:value-match
WordMatch	cts:word-match
Collections	cts:collections
ElementAttributeValues	cts:element-attribute-values
ElementAttributeWords	cts:element-attribute-words
ElementValues	cts:element-values
ElementWords	cts:element-words
FieldValues	cts:field-values
FieldWords	cts:field-words
Uris	cts:uris
Values	cts:values
Words	cts:words

5.0 Using MarkLogic Server for Output

This chapter covers the following topics related to storing MapReduce job results in a MarkLogic Server instance:

- Basic Steps
- Creating a Custom Output Query with KeyValueOutputFormat
- Controlling Transaction Boundaries
- Streaming Content Into the Database
- Performance Considerations for ContentOutputFormat
- Output Configuration Properties
- OutputFormat Subclasses

5.1 Basic Steps

The MarkLogic Connector for Hadoop API supports storing MapReduce results in MarkLogic Server as documents, nodes, and properties. When using MarkLogic Server to store the results of the reduce phase, configuring the reduce step of a MapReduce job includes at least the major tasks:

- Identifying the Output MarkLogic Server Instance
- Configuring the Output Key and Value Types
- Defining the Reduce Function
- Disabling Speculative Execution
- Example: Storing MapReduce Results as Nodes

5.1.1 Identifying the Output MarkLogic Server Instance

The MarkLogic Server output instance is identified by setting configuration properties. For general information on setting configuration properties, see “Configuring a MapReduce Job” on page 32.

Specify the following properties to identify the output MarkLogic Server instance:

Property	Description
`mapreduce.marklogic.output.host`	Hostname or IP address of the server hosting your output XDBC App Server. The host must be resolvable by the nodes in your Hadoop cluster, so you should usually not use "local-host".
`mapreduce.marklogic.output.port`	The port configured for the target XDBC App Server on the input host.
`mapreduce.marklogic.output.username`	Username privileged to update the database attached to the XDBC App Server.
`mapreduce.marklogic.output.password`	Cleartext password for the `output.username` user.

When you use MarkLogic Server in a cluster, all MarkLogic Server hosts containing a forest in the output database must be accessible through an XDBC server on the same port. The host identified in the configuration properties may be any qualifying host in the cluster. For details, see "Deploying the Connector with a MarkLogic Server Cluster" on page 11.

> **Note:** The target database must be configured for manual directory creation by setting the `directory creation` database configuration setting to "manual". See Database Settings in the *Administrator's Guide*.

You can configure a job to connect to the App Server through SSL by setting the `mapreduce.marklogic.output.usessl` property. For details, see "Making a Secure Connection to MarkLogic Server with SSL" on page 13. For an example, see "ContentReader" on page 112.

For more information on the properties, see "Output Configuration Properties" on page 86.

5.1.2 Configuring the Output Key and Value Types

As discussed in "Reduce Task" on page 30, the `org.apache.hadoop.mapreduce.OutputFormat` subclass configured for the job determines the types of the output keys and values, and how results are stored. Use the `org.apache.hadoop.mapreduce.Job` API to configure the `OutputFormat` and the output key and value types for a job.

The Hadoop MapReduce framework includes `OutputFormat` subclasses for saving results to files in HDFS. The MarkLogic Connector for Hadoop API includes `OutputFormat` subclasses for storing results as documents, nodes, or properties in a MarkLogic Server database. The output key and value types you configure must match the OutputFormat subclass. For example, `PropertyOutputFormat` expects `(DocumentURI, MarkLogicNode)` key-value pairs, so configure the job with `DocumentURI` as the key type and `MarkLogicNode` as the value type.

For a summary of the `OutputFormat` subclasses provided by the MarkLogic Connector for Hadoop, including the expected key and value types, see "OutputFormat Subclasses" on page 91.

The example below configures a job to use `NodeOutputFormat`, which expects `(NodePath, MarkLogicNode)` key-value pairs.

```
import com.marklogic.mapreduce.NodeOutputFormat;
import com.marklogic.mapreduce.NodePath;
import com.marklogic.mapreduce.MarkLogicNode;
import org.apache.hadoop.mapreduce.Job;
...
public class LinkCountInDoc {
    ...

    public static class IntSumReducer
      extends Reducer<Text, IntWritable, NodePath, MarkLogicNode> {...}
    public static void main(String[] args) throws Exception {
        Job job = new Job(conf);
        job.setOutputFormatClass(NodeOutputFormat.class);
        job.setOutputKeyClass(NodePath.class);
        job.setOutputValueClass(MarkLogicNode.class);
        job.setReducerClass(IntSumReducer.class);
        ...
    }
}
```

5.1.3 Defining the Reduce Function

To create a reducer, define a subclass of `org.apache.hadoop.mapreduce.Reducer` and override at least the `Reducer.reduce` method. Your `reduce` method should generate key-value pairs of the expected type and write them to the method's `Context` parameter. The MapReduce framework subsequently stores the results written to the `Context` parameter in the file system or database using the configured `OutputFormat` subclass.

The output key and value types produced by the `reduce` method must match the output key and value types expected by the `OutputFormat` subclass. For example, if the job is configured to use `NodeOutputFormat` then the reduce method must generate `(NodePath, MarkLogicNode)` key-value pairs. The following example uses `(Text,IntWritable)` reduce input pairs and produces `(NodePath, MarkLogicNode)` output pairs using `NodeOutputFormat`:

```
import org.apache.hadoop.mapreduce.Reducer;
import org.apache.hadoop.io.Text;
import org.apache.hadoop.io.IntWritable;
import com.marklogic.mapreduce.MarkLogicNode;
import com.marklogic.mapreduce.NodePath;


public class LinkCountInDoc {
  ...
  public static class IntSumReducer
    extends Reducer<Text, IntWritable, NodePath, MarkLogicNode> {
```

```
    public void reduce(Text key, Iterable<IntWritable> values,
        Context context) throws IOException, InterruptedException {
      ...
      context.write(output_node_path, output_node);
    }
    ...
  }
}
```

Notice that the `reduce` method receives a key and a list of all values produced by the map phase with the same key, as discussed in "MapReduce Overview" on page 25.

For a complete list of the `OutputFormat` subclasses provided by the connector and how they use the output keys and values to create database content, see "OutputFormat Subclasses" on page 91.

5.1.4 Disabling Speculative Execution

Disable Hadoop MapReduce speculative execution when using MarkLogic Server for output.

Hadoop MapReduce uses speculative execution to prevent jobs from stalling on slow tasks or worker nodes. For example, if most of the tasks for a job complete, but a few tasks are still running, Hadoop can schedule speculative redundant tasks on free worker nodes. If the original task completes before the redundant task, Hadoop cancels the redundant task . If the redundant task completes first, Hadoop cancels the original task.

Speculative execution is not safe when using MarkLogic Server for output because the cancelled tasks do not clean up their state. Uncommitted changes might be left dangling and eventually lead to `XDMP-FORESTTIM` errors.

Disable speculative execution by setting `mapred.map.tasks.speculative.execution` and/or `mapred.reduce.tasks.speculative.execution` to false in your job configuration file or using the `org.apache.conf.Configuration` API.

The nature of your job determines which property(s) to set. Set `mapred.map.tasks.speculative.execution` to false when using MarkLogic Server for output during map. Set `mapred.reduce.tasks.speculative.execution` to false when using MarkLogic Server for output during reduce. Set both properties when using MarkLogic Server for both map and reduce output.

The following examples shows how to set these properties to false:

```
<property>
  <name>mapred.map.tasks.speculative.execution</name>
  <value>false</value>
</property>

<property>
  <name>mapred.reduce.tasks.speculative.execution</name>
```

```
  <value>false</value>
</property>
```

5.1.5 Example: Storing MapReduce Results as Nodes

This example demonstrates storing the results of a MapReduce job as child elements of documents in the database. The code samples shown here are small slices of the full code. For the complete code, see the `LinkCountInDoc` example in the `com.marklogic.mapreduce.examples` package.

The map step in this example creates a key-value pair for each href to a document in the collection. The reduce step sums up the number of references to each document and stores the total as a new `<ref-count>` element on the referenced document.

The output from the map phase is `(Text, IntWritable)` pairs, where the text is the title attribute text of an href and the integer is always 1, indicating one reference to the title. The sample content is such that the title in an href matches the leaf name of the containing document URI.

For example, if the sample data includes a document with the URI "/space/wikipedia/enwiki/Drama film" and three occurrences of the following href:

```
<a href="http://www.mediawiki.org/xml/export-0.4/" title="Drama film">
  drama film
</a>
```

Then the map output includes three key-value pairs of the form:

```
("Drama film", 1)
```

This results in an input key-value pair for reduce of the form:

```
("Drama film", (1, 1, 1))
```

The reduce phase computes the reference count (3, in this case) and attaches the count as a child node of the referenced document:

```
<wp:page>
  ...
  <ref-count>3</ref-count>
</wp:page>
```

To produce this result, the job uses `NodeOutputFormat` as the `OutputFormat` subclass. `NodeOutputFormat` expects the reducer to produce `(NodePath, MarkLogicNode)` output pairs. `NodeOutputFormat` uses the config property `com.marklogic.mapreduce.output.node.optype` to determine where to insert the node relative to the path. In this example, `nodeopttype` is set to `INSERT_CHILD`, so the `ref-count` node is inserted as a child of the node in the node path:

```
<property>
    <name>mapreduce.marklogic.output.node.optype</name>
```

```
    <value>INSERT_CHILD</value>
</property>
```

To avoid the overhead of creating a new `MarkLogicNode` for every invocation of the reduce method, the sample overrides `Reducer.setup` to create a skeleton node which has its value replaced by the real reference count in `reduce`. The following code snippet demonstrates the initialization of the `result` and `element` variables used in `reduce`. For the full code, see the sample code for `com.marklogic.mapreduce.examples.LinkCountInDoc`.

```
import org.apache.hadoop.mapreduce.Reducer;
import org.apache.hadoop.io.IntWritable;
import org.apache.hadoop.io.Text;
import com.marklogic.mapreduce.MarkLogicNode;
import com.marklogic.mapreduce.NodeInputFormat;
import com.marklogic.mapreduce.NodeOutputFormat;
import com.marklogic.mapreduce.NodePath;
import javax.xml.parsers.DocumentBuilder;
import javax.xml.parsers.DocumentBuilderFactory;
import org.w3c.dom.Element;

public static class IntSumReducer
extends Reducer<Text, IntWritable, NodePath, MarkLogicNode> {
  private final static String TEMPLATE = "<ref-count>0</ref-count>";

  private Element element;
  private MarkLogicNode result;

  protected void setup(Context context)
      throws IOException, InterruptedException {
    try {
      DocumentBuilder docBuilder =
DocumentBuilderFactory.newInstance().newDocumentBuilder();
      InputStream sbis = new StringBufferInputStream(TEMPLATE);
      element = docBuilder.parse(sbis).getDocumentElement();
      result = new MarkLogicNode(element);
    }
    ...
  }
}
```

The following code snippet shows how the reducer sums up the input values, sets up the `ref-count` node, and builds the document node path from a known base URI and the href title passed in as key:

```
public static class IntSumReducer
extends Reducer<Text, IntWritable, NodePath, MarkLogicNode> {

    private final static String ROOT_ELEMENT_NAME = "//wp:page";
    private final static String BASE_URI_PARAM_NAME =
        "/space/wikipedia/enwiki/";
    private NodePath nodePath = new NodePath();
```

```
public void reduce(Text key, Iterable<IntWritable> values,
        Context context
        ) throws IOException, InterruptedException {
    ...

    // Compute reference count and store it in result node
    int sum = 0;
    for (IntWritable val : values) {
        sum += val.get();
    }
    element.setTextContent(Integer.toString(sum));

    // Build node path to referenced document
    StringBuilder buf = new StringBuilder();
    buf.append(BASE_URI).append(key);
    nodePath.setDocumentUri(buf.toString());
    nodePath.setRelativePath(ROOT_ELEMENT_NAME);

    // Store the final results for insertion into the database
    context.write(nodePath, result);
}
```

The above code, with an input pair of `("Drama film", (1,1,1))` produces the following `(node path, node)` output pair:

```
(
  /space/wikipedia/enwiki/Drama film//wp:page,
  <ref-count>3</ref-count>
)
```

Since the `mapreduce.marklogic.output.node.optype` property is `INSERT_CHILD`, the new `<ref-count>` node is inserted as a child of the `wp:page` element addressed by the node path.

With very little code modification, the sample can store the reference count as a property of the referenced document instead of as a child node. To do so, use `PropertyOutputFormat`, construct the document URI instead of node path, and set the config property `com.marklogic.mapreduce.output.propertypopttype`. For an example, see "LinkCountInProperty" on page 107.

5.2 Creating a Custom Output Query with KeyValueOutputFormat

Use `KeyValueOutputFormat` to create a custom output query that can manipulate arbitrary key and value data types and perform operations beyond updating documents, nodes, and properties. The topics covered by this section are:

- Output Query Requirements
- Job Configuration
- Supported Type Transformations

5.2.1 Output Query Requirements

A custom output query is a fully formed XQuery module, specified as the value of the configuration property `mapreduce.marklogic.output.query`. The MarkLogic Connector for Hadoop invokes the query for each output key-value pair produced by the map or reduce function configured to use `KeyValueOutputFormat`. Your query may perform any operations. Output returned by the query is discarded.

The output key-value pair available to your output query through external variables with the names “key” and “value”, in the namespace “http://marklogic.com/hadoop”. For example, the following output query prolog assumes a key type of `xs:string` and a value type of `element()`:

```
<property>
  <name>mapreduce.marklogic.output.query</name>
  <value><![CDATA[
    xquery version '1.0-ml';
    declare namespace mlmr = "http://marklogic.com/hadoop";
    declare variable $mlmr:key as xs:string external;
    declare variable $mlmr:value as element() external;
    (: use the key and value... :)
  ]]></value>
</property>
```

The key and value types are determined by the configuration properties `mapreduce.marklogic.output.keytype` and `mapreduce.marklogic.output.valuetype`. The key and value XQuery types are constrained to those XML schema types with a meaningful `org.apache.hadoop.io.Writable` type transformation, such as between `xs:string` and `org.apache.hadoop.io.Text` or between `element()` and `com.marklogic.mapreduce.MarkLogicNode`. For details, see “Supported Type Transformations” on page 81.

The prolog of your output query must include:

1. A namespace declaration for the namespace containing the key and value variables (“http://marklogic.com/hadoop”). You may use any namespace prefix.

2. An external variable declaration for `key` in the namespace from Step 1. Choose one of the types listed in “Supported Type Transformations” on page 81.

3. An external variable declaration for `value` in the namespace from Step 1. Choose one of the types listed in “Supported Type Transformations” on page 81.

Configure your job to use `KeyValueOutputFormat` and key and value Java types corresponding to the XQuery types expected by your output query. For details, see “Job Configuration” on page 79.

5.2.2 Job Configuration

Configure the following job properties to use a custom output query:

- Set `mapreduce.marklogic.output.query` to your output query. This must be a fully formed XQuery module, suitable for evaluation with `xdmp:eval`. For details, see "Output Query Requirements" on page 79.
- Set `mapreduce.marklogic.output.keytype` to the XQuery type of the key. The default type is `xs:string`.
- Set `mapreduce.marklogic.output.valuetype` to the XQuery type of the value. The default type is `xs:string`.
- Set the map or reduce output format to `KeyValueOutputFormat`.
- Set the map or reduce output key Java type to an `org.apache.hadoop.io.Writable` subclass that is convertible to the XQuery type in `mapreduce.marklogic.output.keytype`.
- Set the map or reduce output value Java type to an `org.apache.hadoop.io.Writable` that is subclass convertible to the XQuery type `mapreduce.marklogic.output.valuetype`.

For details on the available key and value types and supported conversions between the XQuery types and the Hadoop Java classes, see "Supported Type Transformations" on page 81.

The configuration properties may be set either in a configuration file or using the `org.apache.hadoop.mapreduce.Job` API. The following example configures the MarkLogic Connector for Hadoop output query, XQuery key type, and XQuery value type in a configuration file:

```
<property>
  <name>mapreduce.marklogic.output.keytype</name>
  <value>xs:string</value>
</property>
<property>
  <name>mapreduce.marklogic.output.valuetype</name>
  <value>element()</value>
</property>
<property>
  <name>mapreduce.marklogic.output.query</name>
  <value><![CDATA[
    xquery version '1.0-ml';
    declare namespace mlmr = "http://marklogic.com/hadoop";
    declare variable $mlmr:key as xs:string external;
    declare variable $mlmr:value as element() external;
    (: use the key and value... :)
  ]]></value>
</property>
```

The following example configures the job output format class, key class, and value class corresponding to the custom output query settings above:

```
import org.apache.hadoop.Job;
import org.apache.hadoop.conf.Configuration;
import org.apache.hadoop.io.Text;
import com.marklogic.mapreduce.MarkLogicNode;
```

```
class myClass {
  public static void main(String[] args) throws Exception {
    Configuration conf = new Configuration();
    Job job = new Job(conf);
    job.setOutputFormatClass(KeyValueOutputFormat);
    job.setOutputKeyClass(Text.class);
    job.setOutputValueClass(MarkLogicNode.class);
    ...
  }
}
```

For a complete example, see “RevisionGrouper” on page 110 and the sample code for `com.marklogic.mapreduce.examples.RevisionGrouper`.

5.2.3 Supported Type Transformations

When you use KeyValueOutputFormat, the MarkLogic Connector for Hadoop converts the key and value produced by the job map or reduce function from an `org.apache.hadoop.io.Writable` object to values of the configured XQuery types. The table below summarizes the supported type conversions.

When using `org.apache.hadoop.io.Text` with any XQuery type other than `xs:string`, the string value format must correspond to the serialized representation of the XQuery type. For example, if the XQuery type is `cts:box`, then the `Text` string representation must be a serialized `cts:box` value, such as “[-122, 78, 30, 45]”. Similarly, if the XQuery type is `xs:duration`, then the `Text` string representation must be a serialized `xs:duration`, such as “-P92M”.

If the key or value XQuery type is	Then the Java type must be
xs:string	org.apache.hadoop.io.Text
xs:boolean	org.apache.hadoop.io.BooleanWritable org.apache.hadoop.io.Text
xs:integer	org.apache.hadoop.io.IntWritable org.apache.hadoop.io.VIntWritable org.apache.hadoop.io.LongWritable org.apache.hadoop.io.VLongWritable org.apache.hadoop.io.Text
xs:decimal	org.apache.hadoop.io.IntWritable org.apache.hadoop.io.VIntWritable org.apache.hadoop.io.LongWritable org.apache.hadoop.io.VLongWritable org.apache.hadoop.io.FloatWritable org.apache.hadoop.io.DoubleWritable org.apache.hadoop.io.Text
xs:float xs:double	org.apache.hadoop.io.IntWritable org.apache.hadoop.io.VIntWritable org.apache.hadoop.io.LongWritable org.apache.hadoop.io.VLongWritable org.apache.hadoop.io.FloatWritable org.apache.hadoop.io.DoubleWritable org.apache.hadoop.io.Text
xs:duration xs:dayTimeDuration xs:yearMonthDuration xs:dateTime xs:time xs:date	org.apache.hadoop.io.Text
xs:hexBinary	org.apache.hadoop.io.BytesWritable org.apache.hadoop.io.Text
xs:base64Binary	org.apache.hadoop.io.Text
xs:gDay xs:gMonth xs:gYear xs:gYearMonth	org.apache.hadoop.io.Text
cts:box cts:circle cts:point cts:polygon	org.apache.hadoop.io.Text
node() element() binary()	com.marklogic.mapreduce.MarkLogicNode org.apache.hadoop.io.Text

5.3 Controlling Transaction Boundaries

When you use one of the `OutputFormat` subclasses provided by the MarkLogic Connector for Hadoop, such as `ContentOutputFormat`, the MarkLogic Connector for Hadoop manages the output MarkLogic Server XDBC session and the requests for storing results in the database.

Each output key-value pair represents an update to the database. Multiple updates are grouped into a single transaction. For all `OutputFormat` subclasses except `ContentOutputFormat`:

- Each output key-value pair generates an update request to MarkLogic Server.
- Every 1000 requests constitutes a transaction.

Use the `mapreduce.marklogic.output.transactionsize` configuration property to adjust the number of requests per transaction. For example, if you set the transaction size to 5, then the connector commits a transaction for every 5 requests. For `OutputFormat` classes other than `ContentOutputFormat`, this means the connector bundles every 5 updates into a transaction.

```
<property>
  <name>mapreduce.marklogic.output.transactionsize</name>
  <value>5</value>
</property>
```

For `ContentOutputFormat`, the interactions between the number of updates, requests, and transactions is more complicated. For details, see “Time vs. Space: Configuring Batch and Transaction Size” on page 84.

5.4 Streaming Content Into the Database

When you use ContentOutputFormat, you can stream text, XML, and binary documents to MarkLogic Server.

Using streaming can significantly decrease the memory requirements on the task nodes initiating document insertion, but it can also significantly decrease overall throughput and changes the behavior of your job in the face of errors; for details, see “Reducing Memory Consumption With Streaming” on page 86.

To use the stream feature, configure your job as you normally would to insert content into the databae, but also do the following:

- Set the map or reduce output format to `ContentOutputFormat`.

  ```
  job.setOutputFormatClass(ContentOutputFormat.class);
  ```

- Set the map or reduce output key Java type to `com.marklogic.mapreduce.DocumentURI`.

  ```
  job.setOutputKeyClass(DocumentURI.class);
  ```

- Set the map or reduce output value Java type to `com.marklogic.mapreduce.StreamLocator`.

```
job.setOutputValueClass(StreamLocator.class);
```

- In your map or reduce function, set the value in each key-value pair to a `StreamLocator` object associated with the content you want to stream.

```
context.write(yourDocURI,
              new StreamLocator(yourPath, CompressionCodec.NONE);
```

5.5 Performance Considerations for ContentOutputFormat

When using `ContentOutputFormat`, be aware of the following performance tradeoffs discussed in this section:

- Time vs. Space: Configuring Batch and Transaction Size
- Time vs. Correctness: Using Direct Forest Updates
- Reducing Memory Consumption With Streaming

5.5.1 Time vs. Space: Configuring Batch and Transaction Size

When using `ContentOutputFormat`, you can tune the insertion throughput and memory requirements of your job by configuring the batch size and transaction size of the job:

- `mapreduce.marklogic.output.batchsize` controls the number of output records (updates) per request to the server.
- `mapreduce.marklogic.output.transactionsize` controls the number of requests to the server per transaction.

Selecting a batch size is a speed vs. memory tradeoff. Each request to the server introduces overhead because extra work must be done. However, unless you use streaming, all the updates in a batch stay in memory until a request is sent, so larger batches consume more more memory.

Transactions introduce overhead on MarkLogic Server, so performing multiple updates per transaction can improve insertion throughput. However, an open transaction holds locks on fragments with pending updates, potentially increasing lock contention and affecting overall application performance.

The default batch size is 100. If you do not explicitly set the transaction size, it varies with batch size, adjusting to keep the maxiumum number of updates per transaction at 2000.

Consider the following example of inserting 10000 documents. Assume batch size is controlled by setting `mapreduce.marklogic.output.batchsize` and transaction size not explicitly set. The last row represents the default behavior for `ContentOutputFormat`.

batch size	total requests	txn size	total txns	updates/txn
1	10000	2000	5	2000
10	1000	200	5	2000
100	100	20	5	2000

If you explicitly set `mapreduce.marklogic.output.transactionsize`, then transaction size does not vary based on batch size. Given the example above of inserting 10000 documents, if you explicitly set batch size to 100 and transaction size to 50, then the job requires 2 transactions and each transaction performs 5000 updates.

Batch size is not configurable for other output formats, such as `NodeOutputFormat`, `PropertyOutputFormat`, and `KeyValueFormat`. For these classes, batch size is always 1 and the default transaction size is 1000. See “Controlling Transaction Boundaries” on page 83.

5.5.2 Time vs. Correctness: Using Direct Forest Updates

`ContentOutputFormat` performs best when the updating tasks interact directly with the forests in which content is inserted. However, direct forest updates can create duplicate document URIs under the following circumstances:

- Content with the same URI already exists in the database, and
- The content was inserted using forest placement or the number of forests changed after initial document creation.

Forest placement occurs when you use the `$forest-ids` parameter of `xdmp:document-insert` to instruct MarkLogic Server to insert a document in a specific forest or to choose from a specific set of forests. See Specifying a Forest in Which to Load a Document in the *Loading Content Into MarkLogic Server Guide*.

To prevent duplicate URIs, the MarkLogic Connector for Hadoop defaults to a slower protocol for `ContentOutputFormat` when it detects the potential for updates to existing content. In this case, MarkLogic Server manages the forest selection, rather than the MarkLogic Connector for Hadoop. This behavior guarantees unique URIs at the cost of performance.

You may override this behavior and use direct forest updates by doing the following:

- Set `mapreduce.marklogic.output.content.directory`. This guarantees all inserts will be new documents. If the output directory already exists, it will either be removed or cause an error, depending on the value of `mapreduce.marklogic.output.content.cleandir`.

- Set `mapreduce.marklogic.output.content.fastload` to true. When `fastload` is true, the MarkLogic Connector for Hadoop always optimizes for performance, even if duplicate URIs are possible.

You can safely set `mapreduce.marklogic.output.content.fastload` to true if the number of forests in the database will not change while the job runs, and at least one of the following is true:

- Your job only creates new documents. That is, you are certain that the URIs are not in use by any document or property fragments already in the database.
- The URIs output with `ContentOutputFormat` may already be in use, but both these conditions are true:
    - The in-use URIs were not originally inserted using forest placement.
    - The number of forests in the database has not changed since initial insertion.
- You set `mapreduce.marklogic.output.content.directory`.

5.5.3 Reducing Memory Consumption With Streaming

The streaming protocol allows you to insert a large document into the database without holding the entire document in memory. Streaming uploads documents to MarkLogic Server in 128k chunks.

Streaming content into the database usually requires less memory on the task node, but ingestion can be slower because it introduces additional network overhead. Streaming also does not take advantage of the connector's builtin retry mechanism. If an error occurs that is normally retryable, the job will fail.

Note: Streaming is only available with `ContentOutputFormat`.

To enable streaming, set the property `mapreduce.marklogic.output.content.streaming` to true and use a `StreamLocator`. For details, see "Streaming Content Into the Database" on page 83.

5.6 Output Configuration Properties

The table below summarizes connector configuration properties for using MarkLogic Server as an output destination. For details, see `com.marklogic.mapreduce.MarkLogicConstants` in the *MarkLogic Hadoop MapReduce Connector API*.

Property	Description
mapreduce.marklogic.output.username	Username for a user privileged to write to the database attached to your XDBC App Server.
mapreduce.marklogic.output.password	Cleartext password for the output.username user.
mapreduce.marklogic.output.host	Hostname of the server hosting your output XDBC App Server.
mapreduce.marklogic.output.port	The port configured for the XDBC App Server on the output host.
mapreduce.marklogic.output.usessl	Whether or not to use an SSL connection to the server. Default: false.
mapreduce.marklogic.output.ssloptionsclass	The name of a class implementing com.marklogic.mapreduce.SslConfigOptions. Used to configure the SSL connection when output.usessl is true.
mapreduce.marklogic.output.node.namespace	A comma-separated list of namespace name-URI pairs to use when evaluating element names in the node path with NodeOutputFormat.
mapreduce.marklogic.output.batchsize	The number of output key-value pairs (updates) to send to MarkLogic Server in a single request. Only honored by ContentOutputFormat. Default: 100. Other output formats have an implicit, unconfigurable batch size of 1.

Property	Description
mapreduce.marklogic.output.content.cleandir	Whether or not to remove the database directory specified by output.content.directory before storing the reduce phase results. If false, an error occurs if the directory already exists when the job runs. Default: false.
mapreduce.marklogic.output.content.collection	A comma separated list of collections to which output documents are added when using ContentOutputFormat.
mapreduce.marklogic.output.content.directory	The database directory in which to create output documents when using ContentOutputFormat. If content.cleandir is false (the default), then the directory must not already exist. If content.cleandir is true and the directory already exists, it is deleted as part of job submission.
mapreduce.marklogic.output.content.encoding	The encoding to use when reading content into the database. Content is translated from this encoding to UTF-8. For details, see Character Encoding in the *Search Developer's Guide*. Default: UTF-8.
mapreduce.marklogic.output.content.fastload	Whether or not to force optimal performance when using ContentOutputFormat. Setting this property to true can result in duplicate URIs. Default: false. See "Performance Considerations for ContentOutputFormat" on page 84.

Property	Description
mapreduce.marklogic.output.content.language	For XML content, the language to specify in the xml:lang attribute on the roote element node if the attribute does not already exist. If not set, no xml:lang is added to the root node, and the language configured for the database is assumed.
mapreduce.marklogic.output.content.namespace	For XML content, specifies a namespace URI to use if there is no namespace at root node of the document. Default: No namespace.
mapreduce.marklogic.output.content.permission	A comma separated list of role-capability pairs to associate with output documents when using ContentOutputFormat.
mapreduce.marklogic.output.content.quality	The document quality to use when creating output documents with ContentOutputFormat. Default: 0.
mapreduce.marklogic.output.content.repairlevel	The level of repair to perform on XML content inserted into the database. Set to either none or full. Default: Behavior depends on the default XQuery version configured for the App Server; none for XQuery 1.0 or 1.0-ml, full for XQuery 0.9-ml.
mapreduce.marklogic.output.content.streaming	Whether or not to use streaming to insert content. Default: false.

Property	Description
mapreduce.marklogic.output.content.type	When using ContentOutputFormat, specifies the content type of output documents. Set to one of XML, TEXT, BINARY, MIXED, or UNKNOWN. Default: XML. UNKNOWN uses the value type of the first value seen in each split to determine the content type. MIXED uses the Document URI suffix and MarkLogic Server MIME type mappings to determine the content type for each document.
mapreduce.marklogic.output.content.tolerateerrors	When this option is true and batch size is greater than 1, if an error occurs for one or more documents being inserted into the database, only the erroneous documents are skipped; all other documents are inserted. When this option is false or batch size is great than 1, errors during insertion can cause all the inserts in the current batch to be rolled back. Default: false.
mapreduce.marklogic.output.keytype	The XQuery type of the output key available to the query defined by mapreduce.marklogic.output.query. Default: xs:string.
mapreduce.marklogic.output.node.optype	When using NodeOutputFormat, the node operation to perform. Set to one of: REPLACE, INSERT_BEFORE, INSERT_AFTER, INSERT_CHILD.

Property	Description
mapreduce.marklogic.output.property.optype	When using PropertyOutputFormat, the property operation to perform. Set to one of SET_PROPERTY or ADD_PROPERTY.
mapreduce.marklogic.output.property.alwayscreate	When using PropertyOutputFormat, whether or not to create a property even if no document exists with the output document URI. Default: false.
mapreduce.marklogic.output.query	A custom output query to be used by KeyValueOutputFormat. See "Creating a Custom Output Query with KeyValueOutputFormat" on page 78.
mapreduce.marklogic.output.transactionsize	The number of requests to MarkLogic Server per transaction. Default: For ContentOutputFormat, this varies with mapreduce.marklogic.output.batchsize to maintain 2000 updates/transaction; for other output formats,1000.
mapreduce.marklogic.output.valuetype	The XQuery type of the output value available to the query defined by mapreduce.marklogic.output.query. Default: xs:string.

5.7 OutputFormat Subclasses

The MarkLogic Connector for Hadoop API provides subclasses of OutputFormat for defining your reduce output key-value pairs and storing the results in a MarkLogic Server database. Specify the OutputFormat subclass appropriate for your job using the org.apache.hadoop.mapreduce.job.setOutputFormatClass function. For example:

```
import com.marklogic.mapreduce.NodeInputFormat;
import org.apache.hadoop.mapreduce.Job;
...
public class LinkCountInDoc {
    ...
    public static void main(String[] args) throws Exception {
        Job job = new Job(conf);
```

```
            job.setOutputFormatClass(NodeOutputFormat.class);
            ...
        }
    }
```

The following table summarizes the `OutputFormat` subclasses provided by the MarkLogic Connector for Hadoop and the key and value types produced by each class. All classes referenced below are in the package `com.marklogic.mapreduce`. All referenced properties are covered in "Output Configuration Properties" on page 86. For more details on these classes and properties, see the *MarkLogic Hadoop MapReduce Connector API*.

Class	Key Type	Value Type	Description
`MarkLogicOutputFormat`	any	any	Superclass for all connector-specific `OutputFormat` classes. Stores output in a MarkLogic Server database.
`ContentOutputFormat`	`DocumentURI`	any (text, XML, binary)	Stores output in a MarkLogic Server database, using the key as the document URI and the value as the content. The content type is determined by the `mapreduce.marklogic.output.content.type` config property. Related configuration properties: • `content.type` • `content.directory` • `content.collection` • `content.permission` • `content.quality` If `mapreduce.marklogic.output.content.type` is `UKNOWN`, the value type must be an instance of `Text`, `MarkLogicNode`, `BytesWritable`, or `MarkLogicDocument`.

Class	Key Type	Value Type	Description
`NodeOutputFormat`	`NodePath`	`MarkLogicNode`	Stores output in a MarkLogic Server database, using the key as the node path and the value as the node to insert. The `mapreduce.marklogic.output.nodeopttype` config property controls where the node is inserted relative to the node path in the key.
`PropertyOutputFormat`	`DocumentURI`	`MarkLogicNode`	Stores output in a MarkLogic Server database by inserting the value node as a property of the document in the key URI. The `mapreduce.marklogic.output.property.optype` config property controls how the property is set.
`KeyValueOutputFormat`	any	any	Run the query defined by `mapreduce.marklogic.output.query` with each output key-value pair. The result is determined by the output query. The key and value types are determined by `mapreduce.marklogic.output.keytype` and `mapreduce.marklogic.output.valuetype`. See "Creating a Custom Output Query with KeyValueOutputFormat" on page 78.

6.0 Troubleshooting and Debugging

This chapter covers the following topics related to troubleshooting and debugging MapReduce jobs that use the MarkLogic Connector for Hadoop:

- Enabling Debug Level Logging
- Solutions to Common Problems

6.1 Enabling Debug Level Logging

Enable debug logging for more insight into the job processing. For example, with debug logging enabled, the MarkLogic Connector for Hadoop logs detailed information about input splits, including the split query. To enable debug logging:

1. Edit `$HADOOP_CONF_DIR/log4j.properties`.
2. Add the following line to enable debug logging:

```
log4j.logger.com.marklogic.mapreduce=DEBUG
```

3. Re-run the job and look for `DEBUG` messages in the console output or log files.

In standalone mode, job output goes to stdout and stderr. In pseudo-distributed or fully distributed mode, job output goes to stdout, stderr, and Hadoop log files. For information on locating log files, see “Viewing Job Status and Logs” on page 34.

6.2 Solutions to Common Problems

This section presents symptoms and possible solutions for the following common problems:

- Configuration File Not Found
- XDBC App Server Not Reachable
- Authorization Failure

For details, consult the documentation for your Hadoop distribution or the Apache Hadoop documentation at http://hadoop.apache.org.

6.2.1 Configuration File Not Found

Symptom:	Job exits with `IllegalArgumentException` related to one of the connector configuration properties.
Cause:	Hadoop failed to find or open the sample configuration file.
Solution:	Confirm that job configuration file is present in `$HADOOP_CONF_DIR` and is readable by the user under which Hadoop runs.
Example:	`Exception in thread "main" java.lang.IllegalArgumentException: mapreduce.marklogic.output.hosts is not specified`

6.2.2 XDBC App Server Not Reachable

Symptom:	Job exits with an error related to the default provider, or exits with a connection refused error.
Cause:	The XDBC App Server is not reachable. Either the host or port for the input or output XDBC App Server is incorrect.
Solution:	Correct your configuration settings in the job configuration file in `$HADOOP_CONF_DIR`.

Example:	`Exception in thread "main" java.lang.IllegalArgumentException: Default provider - Not a usable net address`
	
	`Exception in thread "main" java.io.IOException: com.marklogic.xcc.exceptions.ServerConnectionException: Connection refused`

6.2.3 Authorization Failure

Symptom:	Job exits with an authorization failure.
Cause:	The user name or password for the input or output user is incorrect.
Solution:	Correct your configuration settings in the job configuration file in `$HADOOP_CONF_DIR`.
Example:	`Exception in thread "main" java.io.IOException: com.marklogic.xcc.exceptions.RequestPermissionException: Authorization failed for user 'fred'`

7.0 Using the Sample Applications

This chapter covers the following topics related to using the sample applications:

- Set Up for All Samples
- Additional Sample Data Setup
- Interacting with HDFS
- Sample Applications

7.1 Set Up for All Samples

The following topics apply to preparing to run all the sample applications:

1. Install Required Software
2. Install the Sample Configuration Files
3. Modify the Sample Configuration Files

The `LinkCount` samples, such as `LinkCountInDoc` and `LinkCountValue`, require additional preparation. See “Additional Sample Data Setup” on page 99.

For details about the individual samples, see “Sample Applications” on page 104.

7.1.1 Install Required Software

Install and configure MarkLogic Server, Hadoop MapReduce, and the MarkLogic Connector for Hadoop. For instructions, see “Getting Started with the MarkLogic Connector for Hadoop” on page 15.

The samples require at least one MarkLogic Server database and XDBC App Server. The `LinkCount` samples require a specific database configuration and data set; see “Additional Sample Data Setup” on page 99. The other samples may be run against any XDBC App Server and database, including the `hello-hadoop-xdbc` App Server and `hello-hadoop` database created in “Getting Started with the MarkLogic Connector for Hadoop” on page 15.

7.1.1.1 Multi-host Configuration Considerations

“Getting Started with the MarkLogic Connector for Hadoop” on page 15 describes setting up a single-host configuration, where MarkLogic Server, Hadoop MapReduce, and the MarkLogic Connector for Hadoop are installed on the same host, and Hadoop MapReduce is configured for standalone operation. A multi-host configuration, with Hadoop MapReduce configured for pseudo-distributed or fully-distributed operation, more accurately represents a production deployment.

If you choose to use a multi-host, distributed configuration be aware of the following:

- The MarkLogic Server host configured for the job must be reachable by hostname from the Hadoop MapReduce worker nodes.
- The MarkLogic Connector for Hadoop must be installed on the Hadoop MapReduce host on which you run the sample jobs.
- Normally, you can use different MarkLogic Server instances for input and output, but the `LinkCount` samples expect the same database for both input and output.

Some of the samples use HDFS for input or output. If Hadoop is configured for pseudo- or fully-distributed operation, HDFS must be initialized before running the samples.

To check whether or not HDFS is initialized, run the following command. It should run without error and show similar output:

```
$ hadoop dfs -ls /
drwxr-xr-x   - marklogic\me mygroup 0 2011-07-19 10:48 /tmp
drwxr-xr-x   - marklogic\me mygroup 0 2011-07-19 10:51 /user
```

If the command fails, HDFS might not be initialized. See “Initializing HDFS” on page 102.

7.1.2 Install the Sample Configuration Files

The sample applications include MapReduce configuration files containing MarkLogic Connector for Hadoop settings. These configuration files must be located in the `conf/` directory of the Hadoop MapReduce installation on the Hadoop Job Tracker host. To learn about the Job Tracker, see “Understanding the MapReduce Job Life Cycle” on page 28.

Copy the configuration files in `$CONNECTOR_HOME/conf` to `$HADOOP_CONF_DIR` or the appropriate configuration directory for your Hadoop distribution. For example, if you install the MarkLogic Connector for Hadoop to `/space/marklogic-mapreduce` and you use CDH, then copy the configuration files as follows:

```
$ cp /space/marklogic-mapreduce/conf/*.xml /etc/hadoop/conf
```

7.1.3 Modify the Sample Configuration Files

For each sample you plan to run, modify the MarkLogic Connector for Hadoop sample configuration file in your Hadoop configuration directory to match your MarkLogic Server configuration. The configuration file associated with each sample is listed below.

Sample	Configuration File
HelloWorld	marklogic-hello-world.xml
LinkCountInDoc	marklogic-nodein-nodeout.xml
LinkCountInProperty	marklogic-textin-propout.xml
LinkCountValue	marklogic-textin-textout.xml
LinkCountCooccurrences	marklogic-lexicon.xml
LinkCount	marklogic-advanced.xml
RevisionGrouper	marklogic-nodein-qryout.xml
BinaryReader	marklogic-subbinary.xml
ContentReader	marklogic-docin-textout.xml
ContentLoader	marklogic-textin-docout.xml
ZipContentLoader	marklogic-textin-docout.xml

The configuration properties requiring modification vary from sample to sample. For example, a sample which uses MarkLogic Server for input and HDFS for output will not include `mapreduce.marklogic.output.*` properties.

If the sample uses MarkLogic Server for input, modify at least the following config properties. For details, see “Identifying the Input MarkLogic Server Instance” on page 36.

- `mapreduce.marklogic.input.username`
- `mapreduce.marklogic.input.password`
- `mapreduce.marklogic.input.host`
- `mapreduce.marklogic.input.port`

If the sample uses MarkLogic Server for output, modify at least the following config properties. For details, see “Identifying the Output MarkLogic Server Instance” on page 72.

- `mapreduce.marklogic.output.username`
- `mapreduce.marklogic.output.password`
- `mapreduce.marklogic.output.host`
- `mapreduce.marklogic.output.port`

Some samples might require additional customization. For details on a specific sample, see “Sample Applications” on page 104.

7.2 Additional Sample Data Setup

The following samples require a special database configuration and input data set: The `LinkCount*` samples (`LinkCountInDoc`, `LinkCountValue`, etc.), `RevisionGrouper`. If you do not plan to run these samples, you may skip this section.

This section walks you through creating the MarkLogic Server environment required by these samples.

- Creating the Database
- Creating the XDBC App Server
- Loading the Data

7.2.1 Creating the Database

Use the following information to create a database named “hadoop-samples” with 2 forests and 2 attribute range indexes. You may use a different database name. Use the defaults for any configuration parameters not mentioned below.

For detailed instructions, see Creating and Configuring Forests and Databases and Defining Attribute Range Indexes in the *Administrator’s Guide*.

Configuration Parameter		Setting
database name		hadoop-samples
forest names		hadoop-samples-1, hadoop-samples-2
attribute range index 1	scalar type	string
	parent namespace uri	http://www.mediawiki.org/xml/export-0.4/
	parent localname	a
	localname	href
	collation	Unicode Codepoint
	range value positions	true

Configuration Parameter		Setting
attribute range index 2	scalar type	string
	parent namespace uri	http://www.mediawiki.org/xml/export-0.4/
	parent localname	a
	localname	title
	collation	Unicode Codepoint
	range value positions	true

7.2.2 Creating the XDBC App Server

Use the following information to create an XDBC App Server and attach it to the database created in the previous section. You may use a different name and port. The settings below are the ones assumed by this guide.

For detailed instructions, see Creating and Configuring App Servers in the *Administrator's Guide*.

Configuration Parameter	Setting
xdbc server name	hadoop-samples-xdbc
root	(any)
port	9002
database	hadoop-samples

7.2.3 Loading the Data

Load the data from `$CONNECTOR_HOME/sample-data` into the `hadoop-samples` database with a URI prefix of `enwiki/`. The query below is an example of loading the data using InfoStudio, assuming `$CONNECTOR_HOME` is `/space/marklogic/mapreduce`. To use this query, modify the value of `$local-dir` to match your environment, then run the query in Query Console against any Content Source. To learn more about Query Console, see Query Console Walkthrough in the *Query Console User's Guide*.

```
(: Load the sample data into hadoop-samples database.
 : Modify $local-dir to match your environment. Run against any
 : content source. :)

xquery version "1.0-ml";
```

```
import module namespace info =
"http://marklogic.com/appservices/infostudio"
      at "/MarkLogic/appservices/infostudio/info.xqy";

(: Replace the value of $local-dir with your path to the sample data
directory :)
declare variable $local-dir :=
    "/space/marklogic/mapreduce/sample-data";

declare variable $samples-db := "hadoop-samples";

info:load(
    $local-dir, (),
    <options xmlns="http://marklogic.com/appservices/infostudio">
      <uri>
        <literal>enwiki</literal>
        <path strip-prefix="{$local-dir}"/><literal>/</literal>
        <filename/>
      </uri>
      <format>xml</format>
    </options>,
    $samples-db)
```

The query reports an InfoStudio ticket number when it completes. Use the ticket information with `info:ticket-errors` to check for load errors. For example:

```
xquery version "1.0-ml";
declare namespace html = "http://www.w3.org/1999/xhtml";

import module namespace info =
"http://marklogic.com/appservices/infostudio"
      at "/MarkLogic/appservices/infostudio/info.xqy";

(: Replace the ticket number with your ticket :)
info:ticket-errors("/tickets/ticket/8667452332156256161")
```

If the load succeeds, `info:ticket-errors` should report zero errors in the `total` attribute, similar to the following:

```
<info:errors start="1" page-length="10" total="0" ... />
```

7.3 Interacting with HDFS

Some of the samples use HDFS for input or output. This section briefly summarizes how to copy data into or retrieve data from HDFS in when using Hadoop in pseudo-distributed or fully-distribute configurations.

If you use Hadoop MapReduce standalone, you may skip this section. Standalone Hadoop is the configuration created in "Getting Started with the MarkLogic Connector for Hadoop" on page 15. In a standalone configuration, HDFS uses the local file system directly. You do not need to initialize HDFS, and you can use normal Unix commands to work with the input and output files. You may still use HDFS commands to examine the file system.

This section covers following topics related to pseudo- and fully-distributed HDFS operation:

- Initializing HDFS
- Accessing Results Saved to HDFS
- Placing Content in HDFS to Use as Input

Use the following command see all available HDFS commands, or consult the documentation for your Hadoop distribution.

```
$ hadoop dfs -help
```

7.3.1 Initializing HDFS

If you use Hadoop MapReduce in pseudo-distributed or fully-distributed mode, HDFS must be formatted before you can run the samples. If your HDFS installation is not already initialized, consult the documentation for your Hadoop distribution for instructions.

For example, with Apache Hadoop, you can run the following command to initialize HDFS:

```
$ hadoop namenode -format
```

Near the end of the output, you should see a message that HDFS has been successfully formatted. For example:

```
...
************************************************************/
11/10/03 09:35:14 INFO namenode.FSNamesystem:...
11/10/03 09:35:14 INFO namenode.FSNamesystem: supergroup=supergroup
11/10/03 09:35:14 INFO namenode.FSNamesystem: isPermissionEnabled=true
11/10/03 09:35:14 INFO common.Storage: Image file of size 98 saved ...
11/10/03 09:35:14 INFO common.Storage: Storage directory
/tmp/hadoop-sample/dfs/name has been successfully formatted.
11/10/03 09:35:14 INFO namenode.NameNode: SHUTDOWN_MSG:
/************************************************************
SHUTDOWN_MSG: Shutting down NameNode at sample.marklogic.com...
************************************************************/
```

If formatting succeeds, you can successfully use the `ls` command to examine HDFS. For example:

```
$ hadoop dfs -ls /
```

7.3.2 Accessing Results Saved to HDFS

Some of the sample applications store results to HDFS. You can browse HDFS and examine results from the command line or through your web browser.

In pseudo-distributed or fully distributed configurations, HDFS output pathnames given on the command line of an example are relative to `/user/your_username` in HDFS by default. For example if you run the `LinkCountValue` example, which saves results to HDFS, and specify the output directory as `linkcountvalue`, then the results are in HDFS under `/user/your_username/linkcountvalue`.

To access HDFS through your web browser, use the HDFS NameNode administration page. By default, this interface is available on port 50070 on the NameNode host; consult the documentation for your Hadoop distribution. Assuming localhost is the NameNode, browse to this URL and click on the "Browse the file system link" near the top of the page to browse HDFS:

```
http://localhost:50070
```

To browse HDFS from the command line, use a command similar to the following:

```
$ hadoop dfs -ls /user/your_username
```

For example if you run the `LinkCountValue` example and specify the output directory as `linkcountvalue`, you would see results similar to the following, after running the example:

```
$ hadoop dfs -ls /user/me/linkcountvalue
drwxr-xr-x   - me mygroup ... /user/me/linkcountvalue/_logs
-rw-r--r--   1 me mygroup ... /user/me/linkcountvalue/part-r-00000
```

The results are in the `part-r-XXXXX` file. To see the last few lines of the results, use a command similar to the following:

```
$ hadoop dfs -tail /user/me/linkcountvalue/part-r-00000
```

To copy the result from HDFS to your system's file system, use a command similar to the following:

```
$ hadoop dfs -get /user/me/linkcountvalue/part-r-00000 \
     /my/destination/linkcountvalue.txt
```

7.3.3 Placing Content in HDFS to Use as Input

Some of the samples use HDFS for input. These samples require you to copy the input data to HDFS before running the sample. Place the input files under `/user/your_username` in HDFS using a command such as the following:

```
$ hadoop dfs -put ./mycontent.zip /user/me/zipcontentloader
```

Relative pathnames are relative to `/user/your_username`, so to check the file copied into HDFS above, use a command similar to the following:

```
$ hadoop dfs -ls /user/me/zipcontentloader
-rw-r--r--   1 me mygroup ... /user/me/zipcontentloader/mycontent.zip
```

When you copy files into HDFS, there must not be a pre-existing file of the same name.

7.4 Sample Applications

This section contains detailed instructions for running each of the samples summarized in the table below.

The MarkLogic Connector for Hadoop distribution includes the following resources related to the sampoles:

- Source code, in `$CONNECTOR_HOME/src`.
- Compiled code, in `$CONNECTOR_HOME/lib/marklogic-mapreduce-examples-`*`version`*`.jar`.
- Javadoc. See the package `com.marklogic.mapreduce.examples` in the Javadoc under `$CONNECTOR_HOME/docs`.

The sample applications are:

Sample	Input	Output	Description
HelloWorld	MarkLogic Server	MarkLogic Server	Reads the first word from text in input XML documents, concatentates the words, then stores the results as a new text document in MarkLogic Server.
LinkCountInDoc	MarkLogic Server	MarkLogic Server	Counts href link title attributes in documents in MarkLogic Server, then stores the count as a child node of the referenced document.
LinkCountInProperty	MarkLogic Server	MarkLogic Server	Counts href link title attributes in documents in MarkLogic Server, then stores the count as a property of the referenced document.
LinkCountValue	MarkLogic Server	HDFS	Counts href link titles attributes in documents in MarkLogic Server, then stores the counts in HDFS text files.
LinkCountCooccurrences	MarkLogic Server	HDFS	Counts href link title attributes in documents in MarkLogic Server using a lexicon function, then stores the counts in HDFS text files.
LinkCount	MarkLogic Server	HDFS	Equivalent to `LinkCountValue`, but demonstrates using advanced input mode to provide your own input split and input queries.

Sample	Input	Output	Description
RevisionGrouper	MarkLogic Server	MarkLogic Server	Demonstrates the use of a custom output query, using `KeyValueOutputFormat`.
BinaryReader	MarkLogic Server	HDFS	Demonstrates using advanced input mode with an input query optimized using the split range.
ContentReader	MarkLogic Server	HDFS	Reads documents in a MarkLogic Server database, using an SSL-enabled connection, then writes the contents to HDFS text files.
ContentLoader	HDFS	MarkLogic Server	Reads text files in HDFS, then stores the contents as documents in a MarkLogic Server database.
ZipContentLoader	HDFS	MarkLogic Server	Reads text files from zip files in HDFS, then stores the contents as documents in a MarkLogic Server database.

7.4.1 HelloWorld

This example extracts the first word from all the XML documents in a MarkLogic Server database containing text nodes, sorts the words, concatenates them into a single string, and saves the result as a text document in MarkLogic Server. The example uses basic input mode with the default document selector and subexpression expression. The example uses MarkLogic Server for both input and output.

For detailed instructions on configuring and running this sample, see “Running the HelloWorld Sample Application” on page 18.

Though you can use the sample with any input documents, it is intended to be used with a small data set. It is not optimized for efficient resource use across large data sets. Only XML documents with text nodes contribute to the final results.

This example uses the configuration file:

```
marklogic-hello-world.xml
```

Use the following command to run the example job, with suitable substitution for `$CONNECTOR_HOME` and the connector version:

```
hadoop jar \
  $CONNECTOR_HOME/lib/marklogic-mapreduce-examples-version.jar \
  com.marklogic.mapreduce.examples.HelloWorld -libjars $LIBJARS
```

To view the results, use Query Console to explore the output database. The sample creates `HelloWorld.txt`. If you use the input data from "Configuring the Job" on page 21, `HelloWorld.txt` should contain the phrase "hello world".

7.4.2 LinkCountInDoc

This example calculates reference counts for each document in a set of Wikipedia-based documents, and then stores the reference count for each document as a new `<ref-count>` child node of the document. The example uses MarkLogic Server for input and output.

> **Note:** Before running the sample, follow the instructions in "Additional Sample Data Setup" on page 99.

This example uses the configuration file:

```
marklogic-nodein-nodeout.xml
```

Use the following command to run the example job, with a suitable substitution for `$CONNECTOR_HOME` and the connector version:

```
hadoop jar \
  $CONNECTOR_HOME/lib/marklogic-mapreduce-examples-version.jar \
  com.marklogic.mapreduce.examples.LinkCountInDoc \
  -libjars $LIBJARS marklogic-nodein-nodeout.xml
```

The intra-collection reference counts are stored as new `<ref-count>` elements under the root of each document. Run the following query in Query Console against your XDBC App Server to see a list of documents `ref-count` elements:

```
xquery version "1.0-ml";

for $ref in //ref-count
return fn:concat(xdmp:node-uri($ref)," ",$ref/text())
```

You should see results similar to the following:

```
enwiki/Ayn Rand 1
enwiki/List of characters in Atlas Shrugged 4
enwiki/Academy Award for Best Art Direction 1
enwiki/Academy Award 2
enwiki/Aristotle 5
```

7.4.3 LinkCountInProperty

This example calculates reference counts for each document in a set of Wikipedia-base documents, and then stores the reference count for each document as a property of the document. The examples uses MarkLogic Server for input and output.

Note: Before running the sample, follow the instructions in "Additional Sample Data Setup" on page 99.

This example uses the configuration file:

```
marklogic-textin-propout.xml
```

Use the following command to run the example job, with a suitable substitution for `$CONNECTOR_HOME` and the connector version:

```
hadoop jar \
  $CONNECTOR_HOME/lib/marklogic-mapreduce-examples-version.jar \
  com.marklogic.mapreduce.examples.LinkCountInProperty \
  -libjars $LIBJARS marklogic-textin-propout.xml
```

The intra-collection reference counts are stored as new `<ref-count>` property elements of each document. Run the following query in Query Console against your XDBC App Server to see a list of documents with at least 20 references:

```
xquery version "1.0-ml";

for $ref in xdmp:document-properties()//ref-count
return fn:concat(xdmp:node-uri($ref)," ",$ref/text())
```

You should see results similar to the following:

```
enwiki/Ayn Rand 1
enwiki/List of characters in Atlas Shrugged 4
enwiki/Academy Award for Best Art Direction 1
enwiki/Academy Award 2
enwiki/Aristotle 5
```

7.4.4 LinkCountValue

This example calculates reference counts for each document in a set of Wikipedia-base documents, and then stores the reference counts in HDFS. The examples uses MarkLogic Server for input and HDFS for output.

Note: Before running the sample, follow the instructions in "Additional Sample Data Setup" on page 99.

This example uses the configuration file:

```
marklogic-textin-textout.xml
```

Use the following command to run the example job, with suitable substitutions for `$CONNECTOR_HOME`, the `HDFS_OUTPUT_DIR`, and the connector version. The `HDFS_OUTPUT_DIR` must not already exist.

```
hadoop jar \
  $CONNECTOR_HOME/lib/marklogic-mapreduce-examples-version.jar \
  com.marklogic.mapreduce.examples.LinkCountValue \
  -libjars $LIBJARS marklogic-textin-textout.xml HDFS_OUTPUT_DIR
```

To view the results, examine the results in `HDFS_OUTPUT_DIR`, as described in "Interacting with HDFS" on page 101. For example, if you use `/home/you/lcv` for `HDFS_OUTPUT_DIR`:

```
$ hadoop dfs -ls /home/you/lcv
... part-r-00000
$ hadoop dfs -cat /home/you/lcv/part-r-00000 | grep "^Aristotle"
Aristotle    5
```

Each topic title is followed by a reference count. The raw output differs from the results for the `LinkCountInDoc` and `LinkCountInProperty` examples because `LinkCountValue` generates counts for all references, rather than only for documents in the database.

7.4.5 LinkCount

This example calculates reference counts for each document in a set of Wikipedia-base documents, and then stores the reference counts in HDFS. The examples uses MarkLogic Server for input and HDFS for output. This example is the same as the `LinkCountValue` example, but it uses advanced input mode instead of basic input mode.

> **Note:** Before running the sample, follow the instructions in "Additional Sample Data Setup" on page 99.

This example uses the configuration file:

```
marklogic-advanced.xml
```

Use the following command to run the example job, with suitable substitutions for `$CONNECTOR_HOME`, the `HDFS_OUTPUT_DIR`, and the connector version:

```
hadoop jar \
  $CONNECTOR_HOME/lib/marklogic-mapreduce-examples-version.jar \
  com.marklogic.mapreduce.examples.LinkCount \
  -libjars $LIBJARS marklogic-advanced.xml HDFS_OUTPUT_DIR
```

To view the results, examine the results in `HDFS_OUTPUT_DIR`, as described in "Interacting with HDFS" on page 101. For example, if you use `/home/you/lc` for `HDFS_OUTPUT_DIR`:

```
$ hadoop dfs -ls /home/you/lc
... part-r-00000
$ hadoop dfs -cat /home/you/lcv/part-r-00000 | grep "^Aristotle"
Aristotle    5
```

Each topic title is followed by a reference count. The raw output differs from the results for the `LinkCountInDoc` and `LinkCountInProperty` examples because `LinkCount` generates counts for all references, rather than only for documents in the database.

For details on advanced input mode, see “Advanced Input Mode” on page 50.

7.4.6 LinkCountCooccurrences

This example calculates reference counts for each document in a set of Wikipedia-base documents by using an element attribute lexicon, and then stores the reference counts in HDFS. The examples uses MarkLogic Server for input and HDFS for output.

The sample uses `com.marklogic.mapreduce.functions.ElemAttrValueCooccurrences` (a wrapper around `cts:element-attribute-value-co-occurrences`) to find all `href` attributes which occur along with `title` attributes in side anchor tags. The attribute range indexes created in “Additional Sample Data Setup” on page 99 support this operation. The map input key-value pairs are `(Text, Text)` pairs where the key is the href and the value is the title.

> **Note:** Before running the sample, follow the instructions in “Additional Sample Data Setup” on page 99.

This example uses the configuration file:

```
marklogic-lexicon.xml
```

Use the following command to run the example job, with suitable substitutions for `$CONNECTOR_HOME`, the `HDFS_OUTPUT_DIR`, and the connector version:

```
hadoop jar \
  $CONNECTOR_HOME/lib/marklogic-mapreduce-examples-version.jar \
  com.marklogic.mapreduce.examples.LinkCountCooccurrences \
  -libjars $LIBJARS marklogic-lexicon.xml HDFS_OUTPUT_DIR
```

To view the results, examine the results in `HDFS_OUTPUT_DIR`, as described in “Interacting with HDFS” on page 101. For example, if you use `/home/you/lc` for `HDFS_OUTPUT_DIR`:

```
$ hadoop dfs -ls /home/you/lcco
... part-r-00000
$ hadoop dfs -cat /home/you/lcco/part-r-00000 | grep "^Aristotle"
Aristotle    5
```

Each topic title is followed by a reference count. The raw output differs from the results for the `LinkCountInDoc` and `LinkCountInProperty` examples because `LinkCountCooccurrences` generates counts for all references, rather than only for documents in the database.

7.4.7 RevisionGrouper

This sample application demonstrates using `KeyValueOutputFormat` and a custom output query. The sample places each document in a collection of Wikipedia articles into a collection, based on the year the article was last revised. The sample uses MarkLogic Server for input and output. The job has no reduce phase.

Note: Before running the sample, follow the instructions in "Additional Sample Data Setup" on page 99

The map function input key-value pairs that are the revision timestamp nodes matching the XPath expression `fn:collection()//wp:revision/wp:timestamp`, using the expression in `mapreduce.marklogic.input.subdocumentexpr`. These nodes are of the form:

```
<timestamp>2007-09-28T08:07:26Z</timestamp>
```

The map function picks the year (2007) off the timestamp and generates output key-value pairs where the key is the document URI as a string and the value is the year as a string. Each pair is then passed to the output query defined in `mapreduce.marklogic.output.query`, which adds the document named in the key to a collection named after the year.

This example uses the configuration file:

```
marklogic-nodein-qryout.xml
```

Use the following command to run the example job, with a suitable substitution for `$CONNECTOR_HOME` and the connector version:

```
hadoop jar \
  $CONNECTOR_HOME/lib/marklogic-mapreduce-examples-version.jar \
  com.marklogic.mapreduce.examples.RevisionGrouper \
  -libjars $LIBJARS marklogic-nodein-qryout.xml
```

To view the results, use Query Console to explore the hadoop-samples database. You should see the documents are now in collections based on the year in which they were revised. Alternatively, run a query similar to the following to see a list of documents in the collection for the year 2009:

```
xquery version "1.0-ml";
for $d in fn:collection("2009")
return xdmp:node-uri($d)
```

7.4.8 BinaryReader

This sample application demonstrates using the `mapreduce.marklogic.output.bindsplitrange` configuration property with advanced input mode. The sample extracts the first 1K bytes from each (binary) document in a database and saves the result in HDFS. The sample uses MarkLogic Server for input and HDFS for output. The sample has no reduce phase.

The input query defined in `marlogic-subbinary.xml` uses the `splitstart` and `splitend` external variables provided by the MarkLogic Connector for Hadoop to optimize input query performance. For details on this feature, see "Optimizing Your Input Query" on page 53.

The sample requires a database containing one or more binary documents, and an XDBC App Server. Since the sample assumes all documents in the database are binary documents, you should not use the database and content set up in "Additional Sample Data Setup" on page 99.

Follow these steps to set up the `BinaryReader` sample application:

1. Create a MarkLogic Server database to hold the input data.

2. Create an XDBC App Server and attach it to the database created in Step 1. You may use any root.

3. Edit the configuration file `marklogic-subbinary.xml` to configure the job to use the App Server created in Step 2. For details, see "Modify the Sample Configuration Files" on page 97.

4. Run the sample using the following command, substituting an appropriate value for `HDFS_OUTPUT_DIR` and the connector version:

```
hadoop jar \
  $CONNECTOR_HOME/lib/marklogic-mapreduce-examples-version.jar \
  com.marklogic.mapreduce.examples.BinaryReader \
  -libjars $LIBJARS marklogic-subbinary.xml HDFS_OUTPUT_DIR
```

If using standalone Hadoop, view the results in `HDFS_OUTPUT_DIR`. If using pseudo-distributed or fully-distributed Hadoop, view the results using the Hadoop `dfs` command. For example:

```
$ hadoop dfs -ls HDFS_OUTPUT_DIR
```

7.4.9 ContentReader

This sample application writes documents in a MarkLogic Server database to the HDFS file system, using an SSL-enabled connection to MarkLogic Server. The input database is the database associated with your XDBC App Server. This sample uses MarkLogic Server for input and HDFS for output.

> **Note:** This sample copies the entire contents of the database to HDFS. Choose a target database accordingly, or modify the sample's configuration file to limit the selected documents.

Before running the sample, install and modify the sample configuration files and load the sample data, as discussed in "Modify the Sample Configuration Files" on page 97. This example uses the configuration file:

```
marklogic-docin-textout.xml
```

Before running the sample, configure your XDBC App Server and Java environment to use SSL. For details, see "Making a Secure Connection to MarkLogic Server with SSL" on page 13. You might need to import the MarkLogic Server self-signed certificate into your JRE default keystore using the Java `keytool` utility. See the Java documentation for details on adding certificates to the default keystore.

Run the sample as follows, substituting appropriate paths for `$CONNECTOR_HOME`, `HDFS_OUTPUT_DIR`, and the connector version. The output directory must not already exist.

```
hadoop jar \
  $CONNECTOR_HOME/lib/marklogic-mapreduce-examples-version.jar \
  com.marklogic.mapreduce.examples.ContentReader \
  -libjars $LIBJARS marklogic-docin-textout.xml HDFS_OUTPUT_DIR
```

If using standalone Hadoop, view the results in `~/HDFS_OUTPUT_DIR`. If using pseudo-distributed or fully-distributed Hadoop, view the results using the Hadoop `dfs` command. For example:

```
$ hadoop dfs -ls HDFS_OUTPUT_DIR
$ hadoop dfs -tail HDFS_OUTPUT_DIR/part-m-00000
```

7.4.10 ContentLoader

This sample application loads files in an HDFS directory into a MarkLogic Server database as documents. The destination database is the database associated with your XDBC App Server. The sample uses HDFS for input and MarkLogic Server for output. This sample is a map-only job. That is, there is no reduce step.

Before running the sample, install and modify the sample configuration files, as discussed in "Modify the Sample Configuration Files" on page 97. This example uses the configuration file:

```
marklogic-textin-docout.xml
```

Follow these steps to run the `ContentLoader` sample application:

1. Select the text, XML, or binary files to be loaded into the database.

2. If using Hadoop standalone, create an input directory in your home directory to hold the input files. For example:

   ```
   $ mkdir ~/input_dir
   ```

3. If using Hadoop pseudo- or fully-distributed, create an input directory in HDFS to hold the input files. For example:

   ```
   $ hadoop dfs -mkdir input_dir
   ```

4. Copy the input files into the input directory created in Step 2 or Step 3. For example:

   ```
   $ cp your_input_files ~/input_dir              # standalone

   $ hadoop dfs -put your_input_files input_dir   # distributed
   ```

5. If your input content is not XML, edit `$HADOOP_CONF_DIR/marklogic-textin-docout.xml`. to set the output content type. For example, to load binary files, add:

```
<property>
  <name>mapreduce.marklogic.output.content.type</name>
  <value>binary</value>
</property>
```

6. Run the sample application, substituting appropriate paths for `$CONNECTOR_HOME`, `input_dir`, and the connector version:

```
hadoop jar \
  $CONNECTOR_HOME/lib/marklogic-mapreduce-examples-version.jar \
  com.marklogic.mapreduce.examples.ContentLoader \
  -libjars $LIBJARS marklogic-textin-docout.xml input_dir
```

7. Using Query Console, explore the database associated with your XDBC App Server and observe that the input files appear as documents in the database.

The document URIs in the database correspond to the HDFS path. For example, if one of the input documents is located in HDFS on `samples.marklogic.com` as `/user/guest/data/file1.xml`, then the document URI in the database is:

```
hdfs://samples.marklogic.com/user/guest/data/file1.xml
```

If you receive an error similar to the following, then you must change the directory creation database configuration setting to “manual”.

```
java.lang.IllegalStateException: Manual directory creation mode is
required.
```

7.4.11 ZipContentLoader

This sample application loads the contents of zip files in an HDFS directory into a MarkLogic Server database as documents. The destination database is the database associated with your XDBC App Server. The sample uses HDFS for input and MarkLogic Server for output. This sample is a map-only job. That is, there is no reduce step.

Before running the sample, install and modify the sample configuration files, as discussed in “Modify the Sample Configuration Files” on page 97. This example uses the configuration file:

```
marklogic-textin-docout.xml
```

Follow these steps to run the `ZipContentLoader` sample application:

1. Create one or more zip files containing text, XML, or binary files.

2. If using Hadoop standalone, create an input directory in your home directory to hold the zip input files. For example:

```
$ mkdir ~/zip_input_dir
```

3. If using Hadoop pseudo- or fully-distributed, create an input directory in HDFS to hold the input files. For example:

```
$ hadoop dfs -mkdir zip_input_dir
```

4. Copy the input zip files into the input directory created in Step 2 or Step 3. For example:

```
$ cp your_input_files ~/zip_input_dir           # standalone

$ hadoop dfs -put your_data.zip zip_input_dir   # distributed
```

5. If your zip file content is not XML, set the output content type in `$HADOOP_CONF_DIR/marklogic-textin-docout.xml`. For example, to load binary files, add:

```
<property>
  <name>mapreduce.marklogic.output.content.type</name>
  <value>binary</value>
</property>
```

6. Run the sample application, substituting appropriate paths for `$CONNECTOR_HOME`, `zip_input_dir`, and the connector version:

```
hadoop jar \
  $CONNECTOR_HOME/lib/marklogic-mapreduce-examples-version.jar \
  com.marklogic.mapreduce.examples.ZipContentLoader \
  -libjars $LIBJARS marklogic-textin-docout.xml zip_input_dir
```

7. Using Query Console, explore the database associated with your XDBC App Server and observe that the zip file contents appear as documents in the database.

The document URIs in the database correspond to the paths within the zip file. For example, if the zip file contents are rooted at a folder named “enwiki”, and that folder contains a file named “Wisconsin”, then the resulting document URI is:

```
enwiki/Wisconsin
```

If you receive an error similar to the following, use the Admin Interface to change the directory creation database configuration setting to “manual”:

```
java.lang.IllegalStateException: Manual directory creation mode is
required.
```

8.0 Technical Support

MarkLogic provides technical support according to the terms detailed in your Software License Agreement or End User License Agreement. For evaluation licenses, MarkLogic may provide support on an “as possible” basis.

For customers with a support contract, we invite you to visit our support website at http://support.marklogic.com to access information on known and fixed issues.

For complete product documentation, the latest product release downloads, and other useful information for developers, visit our developer site at http://developer.marklogic.com.

If you have questions or comments, you may contact MarkLogic Technical Support at the following email address:

support@marklogic.com

If reporting a query evaluation problem, be sure to include the sample XQuery code.

Combined Product Notices

MarkLogic Server 7.0-6 and supporting products.
Last updated: December 11, 2015.

COPYRIGHT

Copyright © 2015 MarkLogic Corporation. All rights reserved.
This technology is protected by U.S. Patent No. 7,127,469B2, U.S. Patent No. 7,171,404B2, U.S. Patent No. 7,756,858 B2, and U.S. Patent No 7,962,474 B2, US 8,892,599, and US 8,935,267.

The MarkLogic software is protected by United States and international copyright laws, and incorporates certain third party libraries and components which are subject to the attributions, terms, conditions and disclaimers set forth below.

1. Contains SAP BusinessObjects Text Analysis XI from SAP AG. Copyright © 1996-2011. All rights reserved.

2. Highslide Software from Highslide Software Torstein Honsi. All Highslide Software is protected by local and international copyright laws. All rights reserved.

3. Icons developed by Yusuke Kamiyamane. Copyright © 2011 Yusuke Kamiyamane. All rights reserved. Icons are licensed subject to http://creativecommons.org/licenses/by/3.0/legalcode.

4. Antenna House OfficeHTML Copyright © 2000-2008 Antenna House, Inc. All rights reserved.

5. Argus Copyright ©1999-2008 Iceni Technology Ltd. All rights reserved.

6. Rosette Linguistics Platform 6.5.2/6.5.3 from Basis Technology Corporation, Copyright © 2004-2008 Basis Technology Corporation. All rights reserved.

7. ISYS Search. Copyright © 2011 ISYS™ Search Software, Inc. All rights reserved.

8. Software developed by the OpenSSL Project for use in the OpenSSL Toolkit, Version 1.0.1p (http://www.openssl.org/) Copyright © 1995-1998 Eric Young (eay@cryptsoft.com). All rights reserved. Copyright © 1998-2011 The OpenSSL Project. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. 3. All advertising materials mentioning features or use of this software must display the following acknowledgment: "This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (http://www.openssl.org/)" 4. The names "OpenSSL Toolkit" and "OpenSSL Project" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact openssl-core@openssl.org. 5. Products derived from this

software may not be called "OpenSSL" nor may "OpenSSL" appear in their names without prior written permission of the OpenSSL Project. 6. Redistributions of any form whatsoever must retain the following acknowledgment: "This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (http://www.openssl.org/)" THIS SOFTWARE IS PROVIDED BY THE OpenSSL PROJECT ``AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OpenSSL PROJECT OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. This product includes cryptographic software written by Eric Young (eay@cryptsoft.com). This product includes software written by Tim Hudson (tjh@cryptsoft.com). Additional terms may apply to the foregoing software as further set forth at http://www.openssl.org/source/license.html

9. ICU v. 4.2.1 available from http://site.icu-project.org// Copyright © 1995-2011 International Business Machines Corporation and others. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, provided that the above copyright notice(s) and this permission notice appear in all copies of the Software and that both the above copyright notice(s) and this permission notice appear in supporting documentation. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE BE LIABLE FOR ANY CLAIM, OR ANY SPECIAL INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE. Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization of the copyright holder.

10. Tidy available at http://www.w3.org/People/Raggett/tidy/. Copyright © 1998-2008 World Wide Web Consortium (Massachusetts Institute of Technology, European Research Consortium for Informatics and Mathematics, Keio University). All Rights Reserved.

11. 'zlib' general purpose compression library v. 1.2.3. Copyright © 1995-2010 Jean-loup Gailly and Mark Adler. http://www.zlib.net/zlib_license.html

12. RSA Data Security, Inc. MD5 Message-Digest Algorithm, copyright © 1991-2, RSA Data Security, Inc. Created 1991. All rights reserved. License to copy and use this software is granted provided that it is identified as the "RSA Data Security, Inc. MD5 Message-Digest Algorithm" in all material mentioning or referencing this software or this function. License is also granted to make and use derivative works provided that such works are identified as "derived from the RSA Data Security, Inc. MD5 Message-Digest Algorithm" in all material mentioning or referencing the derived work. RSA Data Security, Inc. makes no representations concerning either the merchantability of this software or the suitability of this software for any particular purpose. It is provided "as is" without express or implied warranty of any kind. These notices must be retained in any copies of any part of this documentation and/or software.

13. TRE software, available at http://laurikari.net/tre/. Copyright © 2001-2009 Ville Laurikari <vl@iki.fi>. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: (1) Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. (2) Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER AND CONTRIBUTORS``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

14. Eigen Library, version 2.0.10, available at http://eigen.tuxfamily.org/index.php?title=Main_Page. Eigen Library is free software: you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version. Eigen Library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details. You should have received a copy of the GNU Lesser General Public License along with Eigen Library. If not, see: http://www.gnu.org/copyleft/lesser.html

15. FunctX XQuery Library v.1.0 available at http://www.xqueryfunctions.com/xq/, Copyright © Datypic (Priscilla Walmsley). You can redistribute such library and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version. This library is distributed in the

hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License as available at http://www.gnu.org/licenses/lgpl-2.1.html#SEC4 for more details.

16. DeployJava.js v. 1.8, Copyright © 2006, 2011, Oracle and/or its affiliates. All rights reserved. ORACLE PROPRIETARY/CONFIDENTIAL. Use of the foregoing library is subject to the following license terms. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of Oracle nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

17. YUI libraries v.2.8 available at http://developer.yahoo.com/yui/. Copyright © 2011 Yahoo! Inc. All rights reserved. Use of the foregoing libraries is subject to the following license terms. Redistribution and use of this software in source and binary forms, with or without modification, are permitted provided that the following conditions are met: Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of Yahoo! Inc. nor the names of YUI's contributors may be used to endorse or promote products derived from this software without specific prior written permission of Yahoo! Inc. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING

NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. Additional notices related to components included in the foregoing library are also available at the following URL: http://yuilibrary.com/license/

18. XSLTForms libraries available at http://sourceforge.net/projects/xsltforms/ . You can redistribute such libraries and/or modify them under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version. These libraries are distributed in the hope that they will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License as available at http://www.gnu.org/licenses/lgpl-2.1.html#SEC4 for more details.

19. jQuery v.1.7 libraries available at http://jquery.com/ and jQuery UI v.1.8.2 libraries available at http://jqueryui.com/. Copyright © 2011 John Resig. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OFMERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE ANDNONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BELIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTIONOF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTIONWITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

20. JSON v. 2 libraries available at http://www.json.org/json2.js. Copyright © 2002 JSON.org. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. The Software shall be used for Good, not Evil. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

21. CodeMirror libraries available at http://codemirror.net/ v5.6.0. Copyright © 2011 by Marijn Haverbeke marijnh@gmail.com. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

22. History.js available https://github.com/balupton/History.js/ Copyright © 2011, Benjamin Arthur Lupton. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of Benjamin Arthur Lupton nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

23. Sample content provided for use with the software is copyrighted by the respective authors as contributed by each of them to Wikipedia and/or the Stack Exchange Network pursuant to the Creative Commons Attribution-ShareAlike License found at http://creativecommons.org/licenses/by-sa/3.0/.

24. Visual Studio Tools for Office 3.0 (Microsoft VSTO 3.0) licensed under Microsoft Public License Microsoft Public License (Ms-PL) found at http://msdn.microsoft.com/en-us/library/ff647676.aspx.

25. The MarkLogic Connector for Hadoop contains Apache Jakarta Commons Modeler. Copyright 2001-2007 The Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

26. jemalloc http://www.canonware.com/jemalloc/index.html, released under the terms of the following BSD-derived licenses: Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: 1. Redistributions of source code must retain the above copyright notice(s), this list of conditions and the following disclaimer. 2. Redistributions in binary form must reproduce the above copyright notice(s), this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER(S) ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER(S) BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. Portions of the software are copyright (C) 2002-2013 Jason Evans, and portions copyright (C) 2009-2013 Facebook, Inc. and copyright (C) 2007-2012 Mozilla Foundation. Neither the name of Facebook, Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission. All rights reserved.

27. Gziphelper; version: 1.0, Feb, 2003, authored by Gao Dasheng, is distributed subject to the following terms: This software is provided 'as-is', without any express or implied warranty. In no event will the authors be held liable for any damages arising from the use of this software. Permission is granted to anyone to use this software for any purpose, including commercial applications, and to alter it and redistribute it freely, subject to the following restrictions: (1.) the origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required; (2) altered source versions must be plainly marked as such, and must not be misrepresented as being the original software; (3) this notice may not be removed or altered from any source distribution.

28. Some features of MarkLogic allow you to develop and use Google Maps. Review Google Map's privacy policy at http://www.google.com/policies/privacy/, legal notices at http://maps.google.com/help/legalnotices_maps.html, and terms of use at http://maps.google.com/help/terms_maps.html.

29. commons-codec, HttpComponents, commons-logging, version 1.4, and Google Maps Utility are used under the Licensed under the Apache License, Version 2.0 (the "License"). You may not use these files except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

30. Mapstraction. Copyright (c) 2012, Mapstraction. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

31. logback-classic and logback-core are provided in object code form only under the Eclipse Public License - v 1.0 available at http://www.eclipse.org/legal/epl-v10.html. Copyright (C) 1999-2012, QOS.ch. All rights reserved. Source code for the Program is available http://logback.qos.ch/.

32. Simple Logging Facade for Java (SLF4J). Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

33. cURL v. 7.22.0 available at http://curl.haxx.se/. Copyright © 1996 - 2011, Daniel Stenberg, <daniel@haxx.se>. All rights reserved. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE. Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization of the copyright holder.

34. heatmap.js distributed subject to the "THE BEER-WARE LICENSE" (Revision 42): <phk@FreeBSD.ORG> wrote this file. As long as you retain this notice you can do whatever you want with this stuff. If we meet some day, and you think this stuff is worth it, you can buy me a beer in return Poul-Henning Kamp.

35. Except for components that are otherwise subject to other open source licenses, the MarkLogic ODBC Driver is released under the GNU Lesser General Public License as published by the Free Software Foundation, version 2.1 of the License.

36. Solr-commons-csv-3.5.0 Copyright 2005-2006 The Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

37. Avro v. 1.7.4. Copyright © The Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

38. Guava v. 11.0.2. Copyright © Google. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

39. Hadoop-auth v. 2.0.0. Copyright © The Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

40. hadoop-hdfs v. 2.0. Copyright © The Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

41. commons-lang v. 2.5. Copyright © The Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

42. commons-configuration v. 1.6. Copyright © The Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

43. jackson-core-asl v. 1.8.8. Copyright © FasterXML. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

44. jackson-mapper-asl v. 1.8.8. Copyright © FasterXML. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

45. log4j v. 1.2.16. Copyright © The Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

46. protobuf-java v. 2.4.0a. Copyright © Google. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of Google nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT

HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

47. xpp3 v. 1.1.3.3. Copyright © 2002 Extreme! Lab, Indiana University. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. The end-user documentation included with the redistribution, if any, must include the following acknowledgment: "This product includes software developed by the Indiana University Extreme! Lab(http://www.extreme.indiana.edu/)." Alternately, this acknowledgment may appear in the software itself, if and wherever such third-party acknowledgments normally appear. The names "Indiana Univeristy" and "Indiana Univeristy Extreme! Lab" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact http://www.extreme.indiana.edu/. Products derived from this software may not use "Indiana Univeristy" name nor may "Indiana Univeristy" appear in their name, without prior written permission of the Indiana University. THIS SOFTWARE IS PROVIDED "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHORS, COPYRIGHT HOLDERS OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IFADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

48. xstream v. 1.4.2. Copyright © 2003-2006, Joe Walnes. Copyright © 2006-2009, 2011 XStream Committers. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of XStream nor the names of its

contributors may be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

49. Simple JavaScript Templating. Copyright © John Resig. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

50. Clarinet. Original work copyright © Isaacs Z. Schlueter, MIT licensed. Copyright © 2011 Nuno Job <nunojob.com>. Licensed under the Apache License, version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0 .

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "as is" basis, without warranties or conditions of any kind, either express or implied. See the License for the specific language governing permissions and limitations under the License.

51. Sax. Copyright © Isaac Z. Schlueter ("Author"). v5.6.0. All rights reserved. The BSD License. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the

distribution. THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN

IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. The file "examples/strict.dtd" is licensed by the W3C and used according to the terms of the W3C SOFTWARE NOTICE AND LICENSE. See LICENSE-W3C.html for details.

52. slimScroll v. 1.3.1. Copyright © Piotr Rochala. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

53. jeditable v. 1.7.3. Copyright © Mike Tuupola. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

54. jQuery Cookie v. 1.3.1. Copyright © Klaus Hartl. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

55. xmlsh v. 1.2.4. Copyright © 2008, David A. Lee. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. 3. Neither the name of the DEI Services Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

56. log4j. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

57. httpclient, Version 4.5.1. Copyright © The Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

58. json-path, Version 0.9.2. Copyright © Kalle Stenflo. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

59. json-smart, Version 1.2. Copyright © Uriel Chemouni. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

60. saxon HE, Version 9.6.0.7. The open-source Saxon-HE product is made available under the Mozilla Public License (the "License"). Prior to Saxon 9.5 MPL Version 1.0 was used; from 9.5 onwards, MPL Version 2.0 is used. You may not use the software except as permitted by the License. You may obtain a copy of the License at http://www.mozilla.org/MPL/. Software distributed under the License is distributed on an "AS IS" basis, WITHOUT WARRANTY OF ANY KIND, either express or implied. See the License for the specific language governing rights and limitations under the License.

61. stax-utils. Copyright (c) 2004, Christian Niles, unit12.net. Copyright (c) 2004, Sun Microsystems, Inc. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. 3. Neither the name of the listed copyright holders nor

the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

62. woodstox, Version 4.2.0. Copyright © Tatu Saloranta. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

63. xerces, Version 2.9.1. Copyright © The Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License").

You may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

64. functx< version 1.0. Copyright © 1991, 1999 Free Software Foundation, Inc. 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA. This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version. This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License as available at http://www.gnu.org/licenses/lgpl-2.1.html#SEC4 for more details.

65. AWS Java SDK v. 1.4.2.1. Copyright © Amazon. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

66. Ported and modified implementation of Berghel/Roach. Copyright © Massachusetts Institute of Technology. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

67. MIT Kerberos v. 1.10.3. Copyright © 1985-2013 by the Massachusetts Institute of Technology. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. Downloading of this software may constitute an export of cryptographic software from the United States of America that is subject to the United States Export Administration Regulations (EAR), 15 CFR 730-774. Additional laws or regulations may apply. It is the responsibility of the person or entity contemplating export to comply with all applicable export laws and regulations, including obtaining any required license from the U.S. government. The U.S. government prohibits export of encryption source code to certain countries and individuals, including, but not limited to, the countries of Cuba, Iran, North Korea, Sudan, Syria, and residents and nationals of those countries. Documentation components of this software distribution are licensed under a Creative Commons Attribution-ShareAlike 3.0 Unported License. (http://creativecommons.org/licenses/by-sa/3.0/). Individual source code files are copyright MIT, Cygnus Support, Novell, OpenVision

Technologies, Oracle, Red Hat, Sun Microsystems, FundsXpress, and others. Project Athena, Athena, Athena MUSE, Discuss, Hesiod, Kerberos, Moira, and Zephyr are trademarks of the Massachusetts Institute of Technology (MIT). No commercial use of these trademarks may be made without prior written permission of MIT. "Commercial use" means use of a name in a product or other for-profit manner. It does NOT prevent a commercial firm from referring to the MIT trademarks in order to convey information (although in doing so, recognition of their trademark status should be given).

68. OpenLDAP v. 2.4.31. Redistribution and use of this software and associated documentation ("Software"), with or without modification, are permitted provided that the following conditions are met: 1. Redistributions in source form must retain copyright statements and notices, 2. Redistributions in binary form must reproduce applicable copyright statements and notices, this list of conditions, and the following disclaimer in the documentation and/or other materials provided with the distribution, and 3. Redistributions must contain a verbatim copy of this document. The OpenLDAP Foundation may revise this license from time to time. Each revision is distinguished by a version number. You may use this Software under terms of this license revision or under the terms of any subsequent revision of the license. THIS SOFTWARE IS PROVIDED BY THE OPENLDAP FOUNDATION AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OPENLDAP FOUNDATION, ITS CONTRIBUTORS, OR THE AUTHOR(S) OR OWNER(S) OF THE SOFTWARE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. The names of the authors and copyright holders must not be used in advertising or otherwise to promote the sale, use or other dealing in this Software without specific, written prior permission. Title to copyright in this Software shall at all times remain with copyright holders. OpenLDAP is a registered trademark of the OpenLDAP Foundation. Copyright 1999-2003 The OpenLDAP Foundation, Redwood City, California, USA. All Rights Reserved. Permission to copy and distribute verbatim copies of this document is granted.

69. Cyrus Sasl (on Solaris for OpenLDAP) v. 2.1.23. Copyright (c) 1994-2012 Carnegie Mellon University. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. 3. The name "Carnegie Mellon University" must not be used to endorse or promote products derived from this software without prior written permission. For permission or any legal details, please contact: Office of Technology Transfer, Carnegie Mellon University, 5000 Forbes Avenue, Pittsburgh, PA 15213-3890, (412) 268-4387, fax: (412)

268-7395, tech-transfer@andrew.cmu.edu 4. Redistributions of any form whatsoever must retain the following acknowledgment: "This product includes software developed by Computing Services at Carnegie Mellon University (http://www.cmu.edu/computing/)." CARNEGIE MELLON UNIVERSITY DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL CARNEGIE MELLON UNIVERSITY BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

70. jena- core, Version 2.10.0Copyright © The Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

71. jena-iri, Version 0.9.5 Copyright © The Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

72. jena-arq, Version 2.10.0 Copyright © The Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

73. xerceslmpl, Version 2.10.0 Copyright © The Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

74. commons-modeler, Version 2.0.1. Copyright © The Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

75. slf4j-api, Version 1.7.5. Copyright (c) 2004-2013 QOS.ch. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

76. slf4j-log4j12, Version 1.7.5. Copyright (c) 2004-2013 QOS.ch. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT

SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

77. xml-apis v. 1.4.01. Copyright © The Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

78. angular (bower) v. 1.2.20. Copyright © Google. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

79. angular-bootstrap (bower) v. 0.11.0. Copyright © AngularUI Team. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

80. angular-cookies (bower) v. 1.2.20. Copyright © Google. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

81. angular-marked (bower) v. 0.0.12. Copyright © J. Harshbarger. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

82. angular-mocks (bower) v. 1.2.20. Copyright © Google. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

83. angular-sanitize (bower) v. 1.2.0. Copyright © Google. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

84. angular-ui-router (bower) v. 0.2.10. Copyright © AngularUI Team. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

85. angular-ui-router.stateHelper (bower) v. 1.1.0. Copyright © Mark Lagendijk. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

86. body-parser (npm) v. 1.5.0. Copyright © Jonathan Ong and Douglas Christopher Wilson. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

87. bootstrap-sass-official (bower) v. 3.2.0. Copyright © Twitter, Inc. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

88. chai (bower & npm) v. 1.9.1. Copyright © Jake Luer. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

89. chai-as-promised (bower & npm) v. 4.1.1. Copyright © Domenic Denicola. Licensed under the WTFPL Version 2 license as available at http://www.wtfpl.net/.

90. chalk (npm) v. 0.5.1. Copyright © Sindre Sorhus. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

91. connect (npm) v. 3.1.0. Copyright © TJ Holowaychuk. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

92. connect-livereload (npm) v. 3.1.0. Copyright © Andi Neck. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE

AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

93. connect-modrewrite (npm) v. 0.5.11. Copyright © Tingan Ho. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

94. cucumber (npm) v. 0.4.1. Copyright © Julien Biezemans. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

95. del (npm) v. 0.1.1. Copyright © Sindre Sorhus. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE

AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

96. duplexer (npm) v. 0.1.1. Copyright © Raynos. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

97. es5-shim (bower) v. 4.0.0. Copyright © Kristopher Michael Kowal and contributors. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

98. event-stream (npm) v. 3.1.7. Copyright © Dominic Tarr. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE

AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

99. express (npm) v. 4.7.2. Copyright © TJ Holowaychuk. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

100. globule (npm) v. 0.2.0. Copyright © Ben Alman. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

101. gulp (npm) v. 3.8.6. Copyright © Fractal. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE

AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

102. gulp-browserify (npm) v. 0.5.0. Copyright © Robo. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

103. gulp-clone (npm) v. 1.0.0. Copyright © Mario Casciaro. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

104. gulp-debug (npm) v. 0.3.0. Copyright © Sindre Sorhus. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE

AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

105. gulp-embedlr (npm) v. 0.5.2. Copyright © Stian Veum Møllersen. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

106. gulp-filelog (npm) v. 0.2.0. Copyright © Adam Ayres. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

107. gulp-filter (npm) v. 0.4.1. Copyright © Sindre Sorhus. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE

AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

108. gulp-if (npm) v. 1.2.4. Copyright © Rob Richardson. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

109. gulp-ignore (npm) v. 1.2.0. Copyright © Rob Richardson. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

110. gulp-inject (npm) v. 0.4.1. Copyright © Joakim Bengtson. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE

AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

117. gulp-jscs (npm) v. 0.6.0. Copyright © Sindre Sorhus. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

111. gulp-jshint (npm) v. 1.7.1. Copyright © Spencer Alger. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

112. gulp-load-plugins (npm) v. 0.5.3. Copyright © Jack Franklin. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE

AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

113. gulp-match (npm) v. 0.2.0. Copyright © Rob Richardson. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

114. gulp-mocha-phantomjs (npm) v. 0.3.0. Copyright © Rui Hu . All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

115. gulp-plumber (npm) v. 0.6.4. Copyright © Vsevolod Strukchinsky. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT

SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

116. gulp-rename (npm) v. 1.2.0. Copyright © Hector Guillermo Parra Alvarez. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

117. gulp-ruby-sass (npm) v. 0.6.6. Copyright © Sindre Sorhus. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

118. gulp-sass (npm) v. 0.7.2. Copyright © David Manning. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE

AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

119. gulp-template (npm). v. 0.1.1. Copyright © Sindre Sorhus. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

120. gulp-util (npm) v. 3.0.0. Copyright © Fractal. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

121. gulp-watch (npm) v. 0.6.8. Copyright © Vsevolod Strukchinsky. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT

SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

122. highcharts-ng (bower) v. 0.0.6. Copyright © Barry Fitzgerald. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

123. highlight.js (bower) v. 8.0.0. Copyright © Ivan Sagalaev. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of highlight.js nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS AND CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

124. istanbul-middleware (npm) v. 0.2.0. Copyright © Yahoo! Inc. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the

name of Yahoo! Inc. nor the names of the contributors may be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS AND CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

125. jquery (bower) v. 2.1.1. Copyright © jQuery Foundation and other contributors. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

126. jshint-stylish (npm) v. 0.4.0. Copyright © Sindre Sorhus. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

127. jsonschema (npm) v. 1.0.0. Copyright © Tom de Grunt. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

128. lazypipe (npm) v. 0.2.2. Copyright © Phil DeJarnett. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

129. lodash (bower & npm) v. 2.4.1. Copyright © John-David Dalton. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

130. main-bower-files (npm) v. 1.0.1. Copyright © Christopher Knötschke. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

131. map-stream (npm) v. 0.1.0. Copyright © Dominic Tarr. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

132. marked (bower) v. 0.3.2. Copyright © Christopher Jeffrey. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

133. mocha (bower) v. 1.20.1. Copyright © TJ Holowaychuk. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

134. modernizr (bower) v. 2.8.3. Copyright © Modernizr. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

135. moment.js (bower) v. 2.7.0. Copyright © Iskren Ivov Chernev. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

136. ngMarkdown (bower) v. 1.1.0. Copyright © Grumpy Wizards. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

137. node-html-encoder (npm) v. 0.0.2. Copyright © strictly-software. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

138. open (npm) v. 0.0.5. Copyright © J Jordan. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

139. open-sans-fontface. Copyright © Steve Matteson. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

140. phantomjs (npm). v. 1.9.7-14. Copyright © Ariya Hidayat. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of the <organization> nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

141. protractor (npm) v. 1.0.0. Copyright © Google. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

142. proxy-middleware (npm) v. 0.5.0. Copyright © Andrew Kelley. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of the <organization> nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

143. q (npm) v. 1.0.1. Copyright © Kristopher Michael Kowal. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

144. q-io (npm) v. 1.11.3. Copyright © Kristopher Michael Kowal. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT

SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

145. requirejs (bower) v. 2.1.14. Copyright © The Dojo Foundation. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

146. requirejs-plugins (bower) v. 1.0.2. Copyright © Miller Medeiros. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

147. selenium-webdriver (npm) v. 2.42.1. Copyright © Selenium Project. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License. You may obtain a copy of the License at
http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

148. semver (npm) v. 3.0.1. Copyright © Isaac Z. Schlueter. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

149. serve-static (npm) v. 1.4.2. Copyright © Douglas Christopher Wilson. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

150. shelljs (npm) v. 0.3.0. Copyright © Artur Adib. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of the Artur Adib nor the names of the contributors may be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL ARTUR ADIB BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES

(INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

151. sinon (bower) v. 1.9.0. Copyright © Christian Johansen. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of the Christian Johansen nor the names of his contributors may be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

152. sinon-chai (bower) v. 2.5.0. Copyright © Domenic Denicola. Licensed under the WTFPL Version 2 license as available at http://www.wtfpl.net/.

153. through2 (npm) v. 0.4.2. Copyright © Rod Vagg. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE. Except where noted, this license applies to any and all software programs and associated documentation files created by the Original Author, when distributed with the Software.

154. tiny-lr-fork (npm) v. 0.0.5. Copyright © Mickael Daniel. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

155. vinyl-fs (npm) v. 0.3.4. Copyright © Fractal. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

156. bluebird v. 1.2.4. Copyright © Petka Antonov. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

157. concat-stream v. 1.4.6. Copyright © Max Ogden. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

158. core-util-is v. 1.0.1. Copyright © Isaac Z. Schlueter. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

159. deepcopy v. 0.3.3. Copyright © Takafumi Sasage. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

160. dicer v. 0.2.3. Copyright © Brian White. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

161. node-multipart v. 0.1.5. Copyright © Tim Smart. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

162. through2 v. 0.5.1. Copyright © Rod Vagg. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE. Except where noted, this license applies to any and all software programs and associated documentation files created by the Original Author, when distributed with the Software.

163. winston v. 0.7.3. Copyright © Charlie Robbins. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

164. www-authenticate v. 0.6.2. Copyright © Randy McLaughlin. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

165. yakaa v. 1.0.0. Copyright © Joyent, Inc. and other Node contributors. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

166. gulp-intercept v. 0.1.0. Copyright © Nik Khilnani. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

167. gulp-jsdoc v. 0.1.4. Copyright © Web It Up (Olivier Gambier). All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

168. gulp-jshint v. 1.5.3. Copyright © Spencer Alger. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

169. gulp-mocha v. 0.4.1. Copyright © Sindre Sorhus. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

170. gulp v. 3.6.1. Copyright © Fractal. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

171. jsdoc v. 3.3.0-alpha5. Copyright © Michael Mathews and the contributors to JSDoc. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

172. jshint v. 2.5.1. Copyright © Anton Kovalyov. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be

included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

173. mocha v. 1.18.2. Copyright © TJ Holowaychuk. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

174. read v. 1.0.5. Copyright © Issac Z. Schlueter. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. THIS SOFTWARE IS PROVIDED BY THE NETBSD FOUNDATION, INC. AND CONTRIBUTORS ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE FOUNDATION OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

175. should v. 4.0.4. Copyright © TJ Holowaychuk. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell

copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

176. v8 v. 3.24. Copyright © the V8 project authors. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of Google Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

177. org.codehaus.groovy:groovy-all:2.2.2 v. 2.3.7. Copyright © Pivotal Software. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

178. org.springframework.boot:spring-boot-starter-security v. 1.1.8. Copyright © Pivotal Software. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

179. org.springframework.boot:spring-boot-starter-web v. 1.1.8. Copyright © Pivotal Software. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

180. org.springframework.boot:spring-boot-starter-jetty v. 1.1.8. Copyright © Pivotal Software. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

181. org.springframework.boot:spring-boot-starter-test v. 1.1.8. Copyright © Pivotal Software. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

182. org.springframework.security:spring-security-web v. 4.0.0. Copyright © Pivotal Software. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

183. org.springframework.security:spring-security-test v. 4.0.0. Copyright © Pivotal Software. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

184. org.springframework.security:spring-security-ldap v. 4.0.0. Copyright © Pivotal Software. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

185. org.apache.directory.server:apacheds-server-jndi:1.5.5 v. 1.5.5. Copyright © Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

186. com.jayway.jsonpath:json-path:0.9.1 v. 1.1.0. Copyright © Jayway. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

187. bluebird v. 2.3.4. Copyright © 2014 Petka Antonov. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or

substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

188. body v. 4.5.0. Copyright © 2012 Raynos. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

189. compression v. 1.2.0. Copyright © 2014 Jonathan Ong. Copyright © 2014 Douglas Christopher Wilson. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

190. connect-timeout v. 1.4.0. Copyright © 2014 Jonathan Ong. Copyright © 2014 Douglas Christopher Wilson. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice

and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

191. cookie-parser v. 1.3.3. Copyright © 2014 TJ Holowaychuk. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

192. csurf v. 1.6.2. Copyright © 2014 Jonathan Ong. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

193. express v. 4.10.1. Copyright © 2009-2014 TJ Holowaychuk. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in

all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

194. express-session v. 1.9.1. Copyright © 2010 Sencha Inc. Copyright © 2011 TJ Holowaychuk. Copyright © Douglas Christopher Wilson. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the 'Software'), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to

permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED 'AS IS', WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

195. lodash v. 2.4.1. Copyright © John-David Dalton. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

196. yargs v. 1.3.2. Copyright © 2010 James Halliday. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

197. moment.js v. 2.7.0. Copyright © 2011-2014 Tim Wood, Iskren Ivov Chernev. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

198. node-monitor v. 0.6.10. Copyright © 2010-2014 Loren West and other contributors. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

199. passport v. 0.2.1. Copyright © 2011-2014 Jared Hanson. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or

substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

200. passport-Idapauth v. 0.2.2. Copyright © 2013 Vese Poikajärvi. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

201. chai v. 1.9.1. Copyright © Jake Luer. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

202. chai-as-promised. Copyright © Domenic Denicola. Licensed under the WTFPL Version 2 license as available at http://www.wtfpl.net/.

203. chalk v. 0.5.1. Copyright © Sinde Sorhus. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit

persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

204. duplexer v. 0.1.1. Copyright © 2012 Raynos. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

205. event-stream v. 3.1.7. Copyright © 2011 Dominic Tarr. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

206. gulp v. 3.8.7. Copyright © 2014 Fractal. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The

above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

207. gulp-if v. 1.2.4. Copyright © Rob Richardson. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

208. gulp-jscs v. 1.1.0. Copyright © Sindre Sorhus. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

209. gulp-jshint v. 1.8.4. Copyright © Spencer Alger. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or

substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

210. gulp-load-plugins v. 0.5.3. Copyright © Jack Franklin. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

211. gulp-plumber v. 0.6.4. Copyright © Vsevolod Strukchinsky. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

212. gulp-util v. 3.0.1. Copyright © Fractal. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY

OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

213. gulp-watch v. 0.6.9. Copyright © Vsesvolod Struckchinsky. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

214. istanbul-middleware v. 0.2.0. Copyright © Yahoo! Inc. All rights reserved. The BSD License. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

215. jshint-stylish v. 0.4.0. Copyright © Sindre Sorhus. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

216. lazypipe v. 0.2.2. Copyright © Phil DeJarnett. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

217. map-stream v. 0.1.0. Copyright © 2011 Dominic Tarr. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

218. mocha v. 1.20.1. Copyright © 2011-2014TJ Holowaychuk. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in

all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

219. monitor-dashboard v. 0.6.7. Copyright © 2010-2014 Loren West and other contributors. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

220. nock v. 0.48.2. Copyright © 2011 Pedro Teixeira. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

221. supertest v. 0.41.1. Copyright © 2014 TJ Holowaychuk. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT

WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

222. through2 v. 0.5.1. Copyright © 2013 Rod Vagg. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. Distributions of all or part of the Software intended to be used by the recipients as they would use the unmodified Software, containing modifications that substantially alter, remove, or disable functionality of the Software, outside of the documented configuration mechanisms provided by the Software, shall be modified such that the Original Author's bug reporting email addresses and urls are either replaced with the contact information of the parties responsible for the changes, or removed entirely. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE. Except where noted, this license applies to any and all software programs and associated documentation files created by the Original Author, when distributed with the Software.

223. vinyl-buffer v. 0.0.0. Copyright © Fractal. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

224. vinyl-fs v. 0.3.6. Copyright © Fractal. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

225. qs v. 2.2.3. Copyright © 2014 Nathan LaFreniere. All rights reserved. The BSD License. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

226. gradle v. 2.1. Copyright © gradleware. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0.

Unless required by applicable law or agreed to in writing, this file is distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

227. sqlite v. 3.8.7. Copyright © D. Richard Hipp. The author or authors of this code have dedicated any and all copyright interest in this code to the public domain.

228. The MarkLogic Connector for Hadoop contains Cloudera . CDH 5.4.1 and consists of Apache Hadoop and additional key open source projects. Copyright March 18, 2015 You may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.cloudera.com/content/cloudera/en/downloads/cdh/cdh-5-4-1.html.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

229. The MarkLogic Connector for Hadoop contains Horton Data Platform HDP 2.2 HDFS. Copyright October 15, 2014, You may not use this file except in compliance with the License. You may obtain a copy of the License at http://docs.hortonworks.com/HDPDocuments/HDP2/HDP-2.2.4/index.html

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

230. The MarkLogic MLCP Connector for Hadoop contains Apache Hadoop 2.6.0 Copyright 2014 The Apache Software Foundation. Licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License.

You may obtain a copy of the License at: https://hadoop.apache.org/releases.html#18+November%2C+2014%3A+Release+2.6.0+available

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

231. libgeohash. Copyright © 2010, SimpleGeo. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of the SimpleGeo nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL,EXEMPLARY, OR

CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

232. Apache Jena (ATQ) v. 2.13.0. Copyright © Isaac Z. Schlueter ("Author"), 2011 Nuno Job. All rights reserved. The BSD License. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

234. junit v. 4.12. Copyright © 2002-2015 JUnit. All Rights Reserved. You may obtain a copy of the License at http://junit.org/license.html . EXCEPT AS EXPRESSLY SET FORTH IN THIS AGREEMENT, THE PROGRAM IS PROVIDED ON AN "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, EITHER EXPRESS OR IMPLIED INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OR CONDITIONS OF TITLE, NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Each Recipient is solely responsible for determining the appropriateness of using and distributing the Program and assumes all risks associated with its exercise of rights under this Agreement , including but not limited to the risks and costs of program errors, compliance with applicable laws, damage to or loss of data, programs or equipment, and unavailability or interruption of operations.

235. logback v. 1.1.3. Copyright © 2004-2013 QOS.ch All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED,

INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

236. slf4j v. 1.7.12. Copyright © 1999-2012, QOS.ch. All rights reserved. You may obtain a copy of the License at http://www.eclipse.org/legal/epl-v10.html. EXCEPT AS EXPRESSLY SET FORTH IN THIS AGREEMENT, THE PROGRAM IS PROVIDED ON AN "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, EITHER EXPRESS OR IMPLIED INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OR CONDITIONS OF TITLE, NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Each Recipient is solely responsible for determining the appropriateness of using and distributing the Program and assumes all risks associated with its exercise of rights under this Agreement , including but not limited to the risks and costs of program errors, compliance with applicable laws, damage to or loss of data, programs or equipment, and unavailability or interruption of operations.

237. Sesame Runtime v. 2.8.5. Copyright © Aduna (http://www.aduna-software.com/) 2001-2013 All rights reserved. You may obtain a copy of the License at https://github.com/ansell/openrdf-sesame/blob/master/core/LICENSE.txt. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR

ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

238. commons-collections v. 3.2.1. Copyright © Apache. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

239. commons-csv v. 1.2. Copyright © Apache. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

240. commons-httpclient v. 3.1, 4.3, and 4.5.1. Copyright © Apache. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

241. commons-io v. 2.4. Copyright © Apache. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

242. Hadoop Package v. 2.6.0. Copyright © Apache. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

243. htrace-core v. 3.0.4. Copyright © Apache. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

244. jackson-jaxrs, jackson-xc v. 1.9.13. Copyright © Apache. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

245. jersey-client, jersey-core v. 1.9. Copyright © Jersey. All Rights Reserved. You may obtain a copy of the License at https://jersey.java.net/license.html. COVERED SOFTWARE IS PROVIDED UNDER THIS LICENSE ON AN "AS IS" BASIS, WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, WARRANTIES THAT THE COVERED SOFTWARE IS FREE OF DEFECTS, MERCHANTABLE, FIT FOR A PARTICULAR PURPOSE OR NON-INFRINGING. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE COVERED SOFTWARE IS WITH YOU. SHOULD ANY COVERED SOFTWARE PROVE DEFECTIVE IN ANY RESPECT, YOU (NOT THE INITIAL DEVELOPER OR ANY OTHER CONTRIBUTOR) ASSUME THE COST OF ANY NECESSARY SERVICING, REPAIR OR CORRECTION. THIS DISCLAIMER OF WARRANTY CONSTITUTES AN ESSENTIAL PART OF THIS LICENSE. NO USE OF ANY COVERED SOFTWARE IS AUTHORIZED HEREUNDER EXCEPT UNDER THIS DISCLAIMER.

246. junit v. 4.11. Copyright © 2002-2015 JUnit. All Rights Reserved. You may obtain a copy of the License at http://junit.org/license.html . EXCEPT AS EXPRESSLY SET FORTH IN THIS AGREEMENT, THE PROGRAM IS PROVIDED ON AN "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, EITHER EXPRESS OR IMPLIED INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OR CONDITIONS OF TITLE, NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Each Recipient is solely responsible for determining the appropriateness of using and distributing the Program and assumes all risks associated with its exercise of rights under this Agreement , including but not limited to the risks and costs of program errors, compliance with applicable laws, damage to or loss of data, programs or equipment, and unavailability or interruption of operations.

247. xml-apis v. 1.4.01. Copyright © Apache. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

248. Sesame Runtime v. 2.8.7 Copyright © Aduna (http://www.aduna-software.com/) 2001-2013 All rights reserved. You may obtain a copy of the License at https://github.com/ansell/openrdf-sesame/blob/master/core/LICENSE.txt. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

249. Apache Commons CSVParser v. 1.2. Copyright © Apache. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

250. httpcore v. 4.4.3. Copyright © Apache. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

251. resolver v. 1.2. Copyright © Apache. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

252. stax2-api v. 3.1.1. Copyright © 2004, Christian Niles, unit12.net. Copyright © 2004, Sun Microsystems, Inc. All rights reserved. You may obtain a copy of the License at https://wiki.kuali.org/display/KULFOUND/StaxUtils+BSD. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

253. commons-logging v. 1.1. Copyright © Apache. Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

254. xom v. 1.2.6. Copyright © 2002, 2004 Elliotte Rusty Harold. You may obtain a copy of the License at http://www.xom.nu/license.xhtml. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

TRADEMARK NOTICE

The MarkLogic name and logo are registered trademarks of MarkLogic Corporation in the United States and/or other countries. Excel and PowerPoint are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Any other names or logos included in the Software, this notice or the documentation are property of the respective trademark owners.